


JOINDATA SYSTEMS, INC.

G 3 8 6 S B

Processor	80386DX
Processor Speed	33MHz
Chip Set	SIS
Max. Onboard DRAM	16MB
SRAM Cache	32/64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387/3167

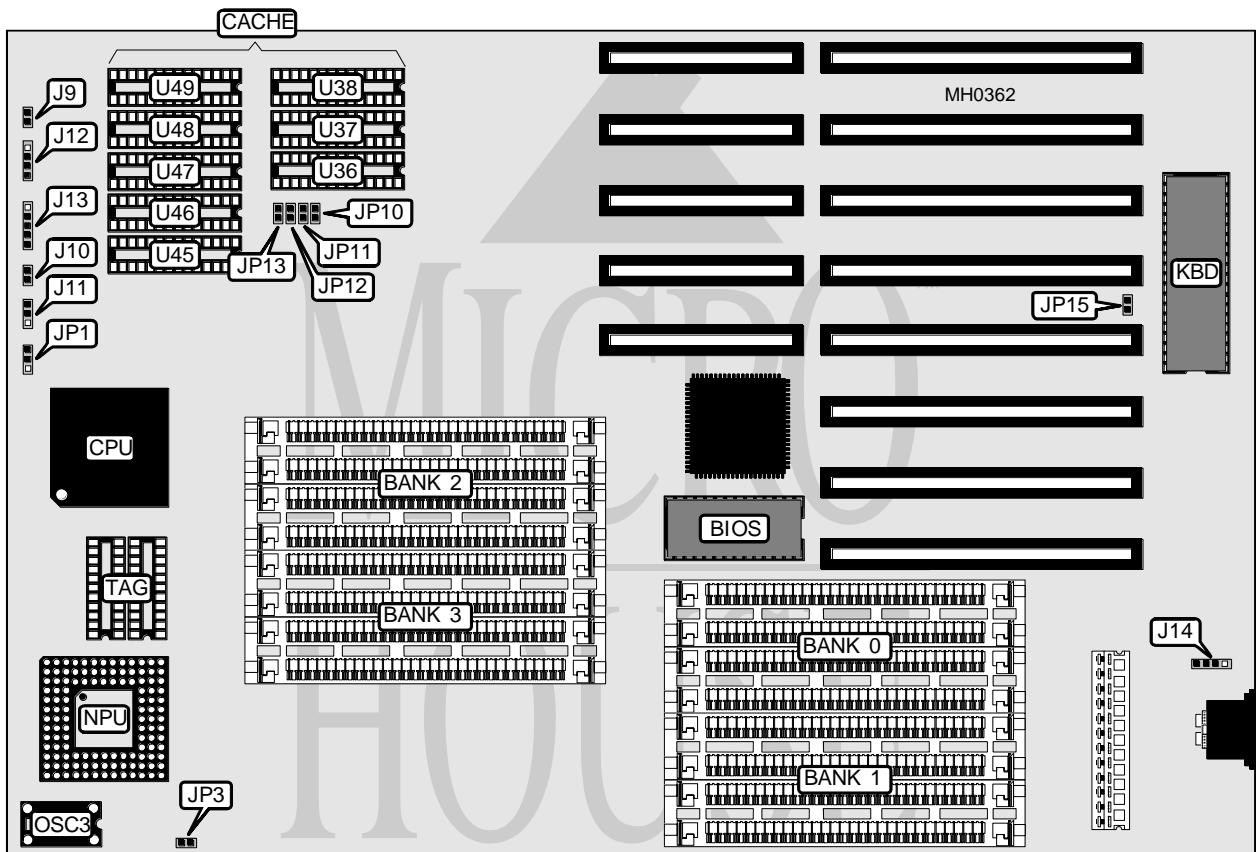

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J9	Speaker	J12
Turbo LED	J10	Power LED & keylock	J13
Turbo switch	J11	External battery	J14

Continued on next page . . .

JOINDATA SYSTEMS, INC.
G 3 8 6 S B

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU mode select synchronous with CPU	JP3	open
NPU mode select synchronous with OSC3	JP3	closed
í Monitor type select color	JP15	closed
Monitor type select monochrome	JP15	open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
32KB	(4) 8K x 8	NONE	(2) 16K x 4
64KB	(4) 8K x 8	(4) 8K x 8	(2) 16K x 4

Note: Bank 0 = U36, U37, U39 & U49.

CACHE JUMPER CONFIGURATION	
Size	JP1
32KB	pins 1 & 2 closed
64KB	pins 2 & 3 closed

CACHE JUMPER CONFIGURATION				
Setting	JP10	JP11	JP12	JP13
Enabled	Closed	Closed	Closed	Closed
Disabled	Open	Open	Open	Open