


# UNIDENTIFIED

## 286 LX - A

**Processor** 80286  
**Processor Speed** 10/12MHz  
**Chip Set** VLSI  
**Max. Onboard DRAM** 4MB  
**Cache** None  
**BIOS** AMI  
**Dimensions** 330mm x 220mm  
**I/O Options** None  
**NPU Options** 80287

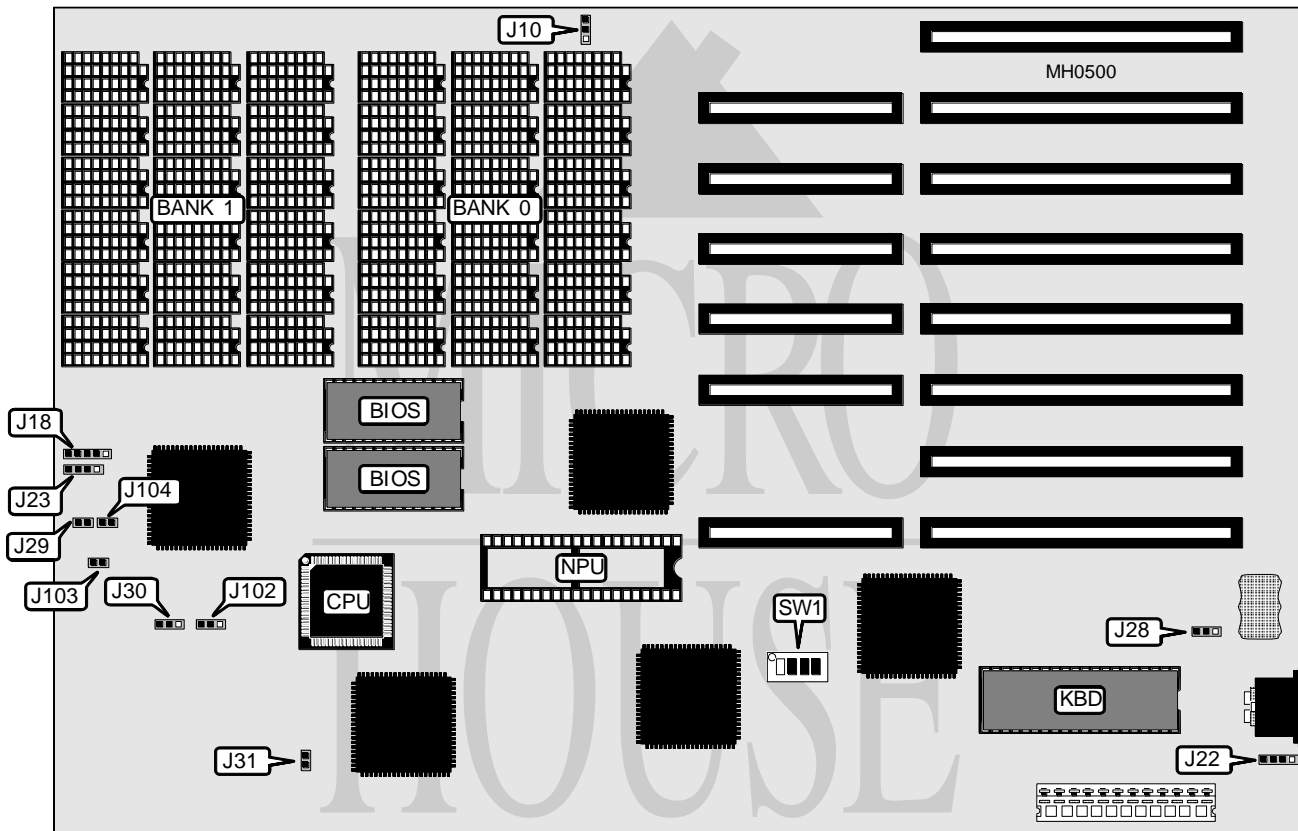

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J18	Reset switch	J29
External battery	J22	Turbo LED	J103
Speaker	J23	Turbo switch	J104

Continued on next page . . .

# UNIDENTIFIED

## 286LX-A

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Battery select internal	J28	pins 1 & 2 closed
Battery select external	J28	pins 2 & 3 closed
í Timing mode select fast	J30	pins 1 & 2 closed
Timing mode select slow	J30	pins 2 & 3 closed
í CPU speed select 12MHz	J102	pins 1 & 2 closed
CPU speed select 10MHz	J102	pins 2 & 3 closed
í Monitor type select color	SW1/4	On
Monitor type select monochrome	SW1/4	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256
2MB	(18) 411000	NONE
4MB	(18) 411000	(18) 411000

DRAM SPEED CONFIGURATION		
Speed	J10	J31
100ns/0 wait states	pins 1 & 2 closed	Closed
120ns/1 wait state	pins 2 & 3 closed	Open

DRAM JUMPER CONFIGURATION			
Size	SW1/1	SW1/2	SW1/3
512KB	On	On	On
640KB	Off	On	On
1MB	On	Off	On
2MB	Off	Off	On
4MB	On	On	Off