


# WYSE TECHNOLOGY, INC.

## WYSE DECISION 486/33E

<b>Processor</b>	80486DX
<b>Processor Speed</b>	33MHz
<b>Chip Set</b>	WYSE
<b>Max. Onboard DRAM</b>	None
<b>Cache</b>	128KB
<b>BIOS</b>	WYSE
<b>Dimensions</b>	288mm x 421mm
<b>I/O Options</b>	Proprietary external CPU/cache card connector, proprietary external keyboard/mouse connector, proprietary external memory card connectors (2), proprietary external local bus connector
<b>NPU Options</b>	None

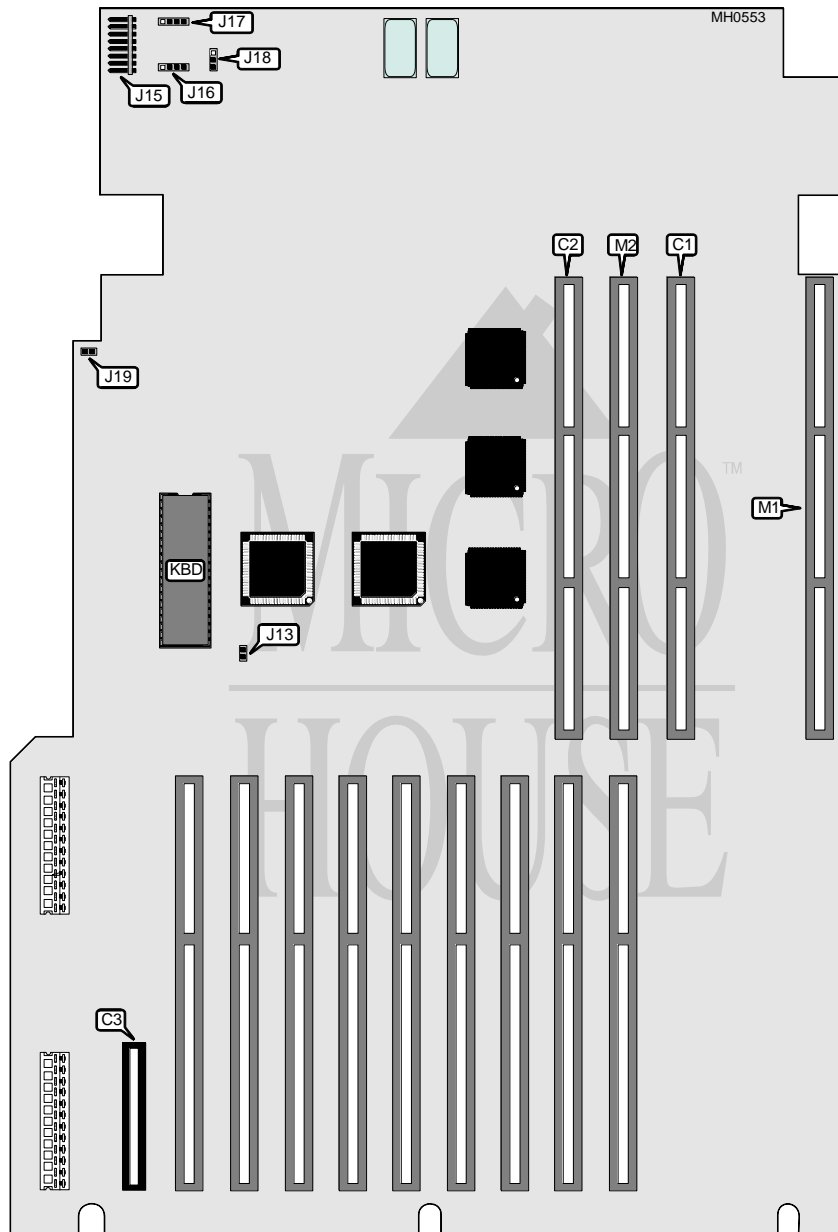


Continued on next page . . .

**WYSE TECHNOLOGY, INC.**  
**WYSE DECISION 486/33E**

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
CPU/Cache board connector	C1	External battery	J17
Proprietary local bus connector	C2	Fan power connector	J18
Mouse/Keyboard connector	C3	Hard drive interface LED	J19
Power LED & keylock	J15	Memory card connector one	M1
Speaker	J16	Memory card connector two	M2

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J13	N/A

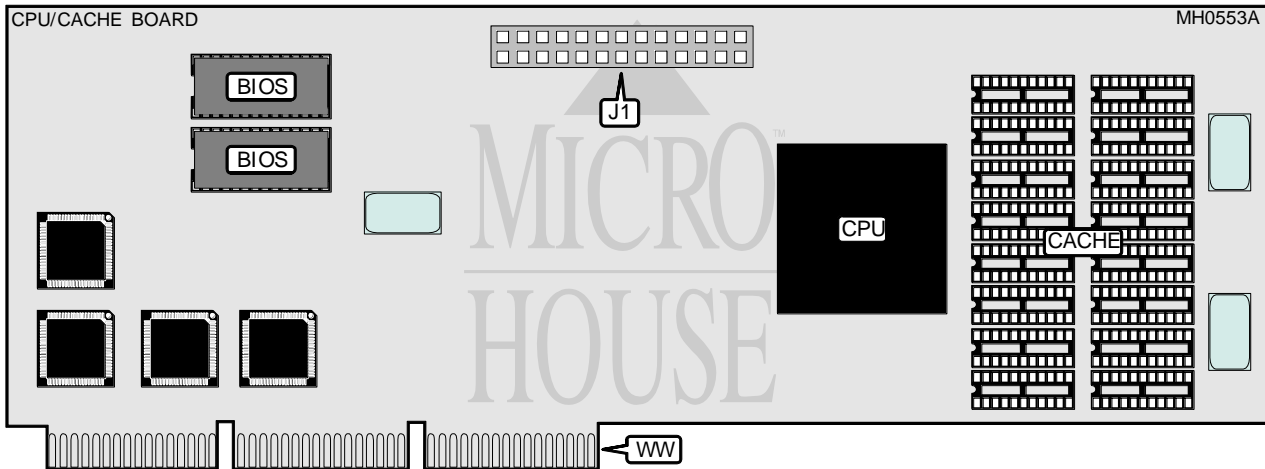


CPU/CACHE BOARD CONNECTIONS			
Purpose	Location	Purpose	Location
Diagnostic test interface connector	J1	Local bus card edge connector	WW

Note: Cache is factory configured and is not configurable.

Continued on next page . . .

WYSE TECHNOLOGY, INC.  
WYSE DECISION 486/33E

... continued from previous page

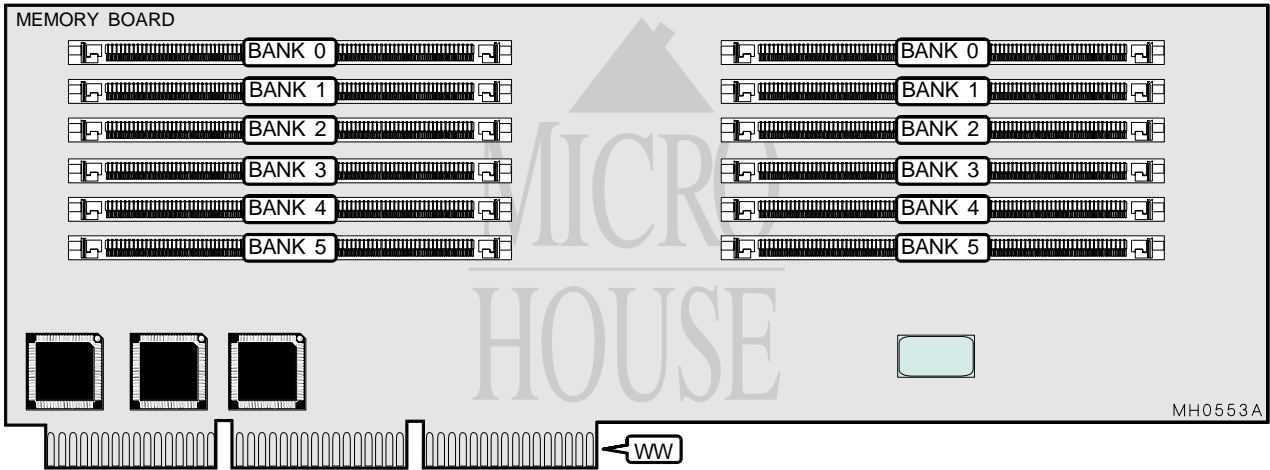

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5
2MB	(2) 256K x 36	NONE	NONE	NONE	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE	NONE	NONE	NONE
4MB	(2) 512K x 36	NONE	NONE	NONE	NONE	NONE
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	NONE	NONE	NONE
8MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	NONE	NONE
8MB	(2) 512K x 36	(2) 512K x 36	NONE	NONE	NONE	NONE
8MB	(2) 1M x 36	NONE	NONE	NONE	NONE	NONE
10MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	NONE
12MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
12MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	NONE	NONE	NONE
16MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 1M x 36	NONE	NONE	NONE	NONE
16MB	(2) 2M x 36	NONE	NONE	NONE	NONE	NONE
20MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	NONE
24MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	NONE	NONE	NONE
32MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	NONE	NONE
32MB	(2) 2M x 36	(2) 2M x 36	NONE	NONE	NONE	NONE
40MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	NONE
48MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	NONE	NONE	NONE
64MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	NONE	NONE
80MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	NONE
96MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36

Note: Table is shown for the easiest possible DRAM configuration. You can configure any of the six banks on one memory board with any type and combination of 36 bit SIMMs as long as the same type of SIMM populates a bank.