


CAF TECHNOLOGY, INC.

B T 3 M M / 5 . 5

Processor	80386DX
Processor Speed	25MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
SRAM Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit proprietary external memory card
NPU Options	80387DX

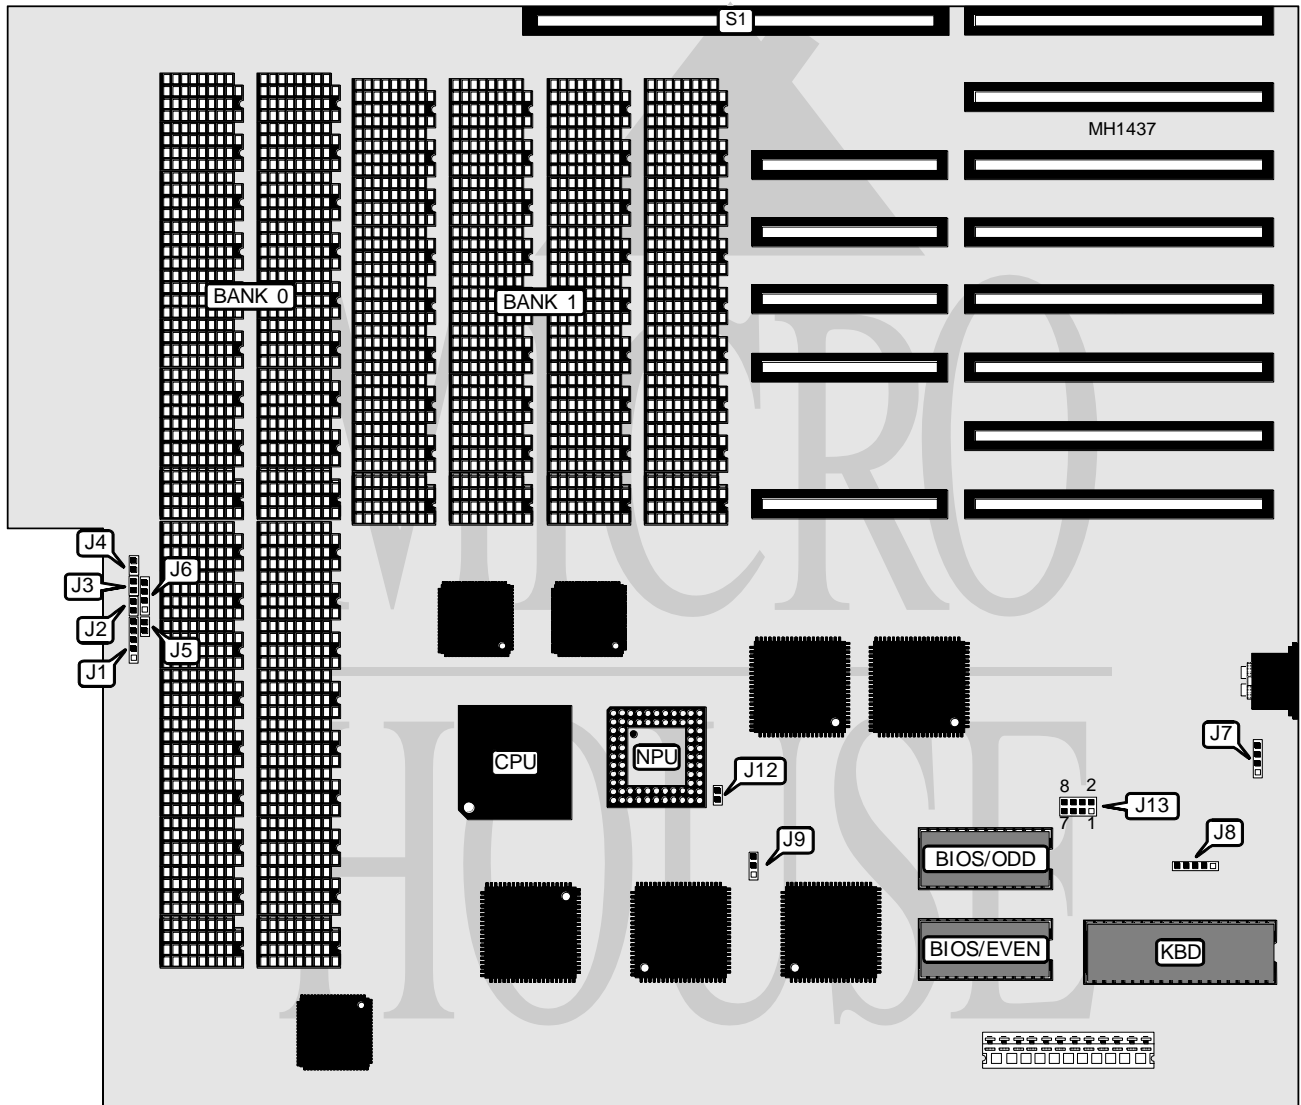

Continued on next page . . .

CAF TECHNOLOGY, INC.
BT3MM/5.5

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Speaker	J6
Reset switch	J2	External battery	J7
Turbo LED	J3	32-bit external memory card	S1

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	J4	closed
í CPU speed select 25MHz	J5	pins 1 & 2 closed
CPU speed select 20MHz	J5	pins 2 & 3 closed
í Monitor type select color	J8	pins 1 & 2 closed
Monitor type select monochrome	J8	pins 2 & 3 closed
í NPU enabled	J9	pins 1 & 2 closed
NPU disabled	J9	pins 2 & 3 closed
í NPU speed select 20MHz	J12	pins 1 & 2 closed
NPU speed select 25MHz	J12	pins 1 & 2 open
í Battery select internal	J13	pins 1 & 2 closed
Battery select external (6VDC)	J13	pins 3 & 4 closed
Battery select external (4.5VDC)	J13	pins 5 & 6 closed
Note CPU speed select must not be changed while power is applied to the system. Press (Ctrl) (Alt) (+) to change to the initial speed set using J5. Pressing (Ctrl) (Alt) (-) switches to the opposite speed.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(36) 41256	NONE
2MB	(36) 41256	(36) 41256
4MB	(36) 411000	NONE
8MB	(36) 411000	(36) 411000