


AUVA COMPUTER, INC. SAM/10 (M2031), SAM/12 (M2040)

Processor	80286
Processor Speed	6/12MHz
Chip Set	Unidentified
Max. Onboard DRAM	1MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

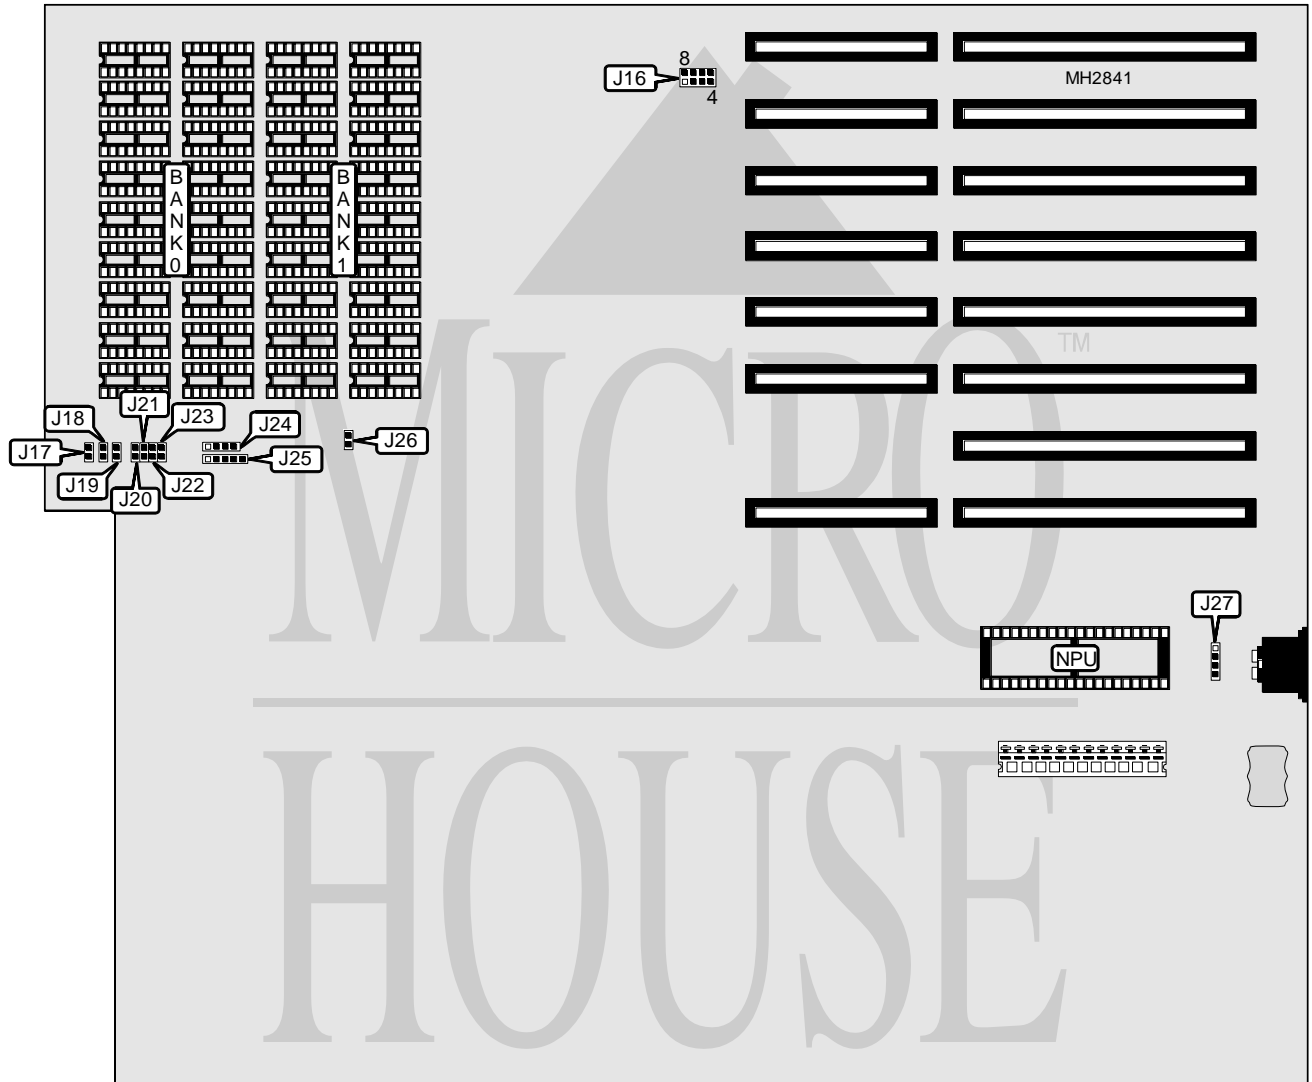

Continued on next page. . .

AUVA COMPUTER, INC.

SAM/10 (M2031), SAM/12 (M2040)

... continued from previous page

CONNECTIONS

Purpose	Location	Purpose	Location
Zero wait state LED	J17	Speaker	J24
Zero wait state connector	J18	Power LED & keylock	J25
Turbo LED	J19	Turbo switch	J26
Reset switch	J23	External battery	J27

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Monitor type select color	J16	Closed
Monitor type select monochrome	J16	Open
í BIOS type select 27128	J22	pins 1 & 8, 2 & 7 closed
BIOS type select 27256	J22	pins 3 & 6, 4 & 5 closed

DRAM CONFIGURATION

Base memory	EMS	Bank 0	Bank 1
512KB	0KB	(18) 41256	NONE
512KB	512KB	(18) 41256	(18) 41256
640KB	0KB	(18) 41256	(18) 4164
640KB	384KB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION

Base memory	EMS	J20	J21
512KB	0KB	Closed	Closed
512KB	512KB	Closed	Open
640KB	0KB	Open	Closed
640KB	384KB	Open	Open