


# ICL

## ERGOPRO P6/150

<b>Processor</b>	Pentium Pro
<b>Processor Speed</b>	120/133/150/166MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	128MB
<b>Cache</b>	256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	390mm x 210mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2)
<b>NPU Options</b>	None

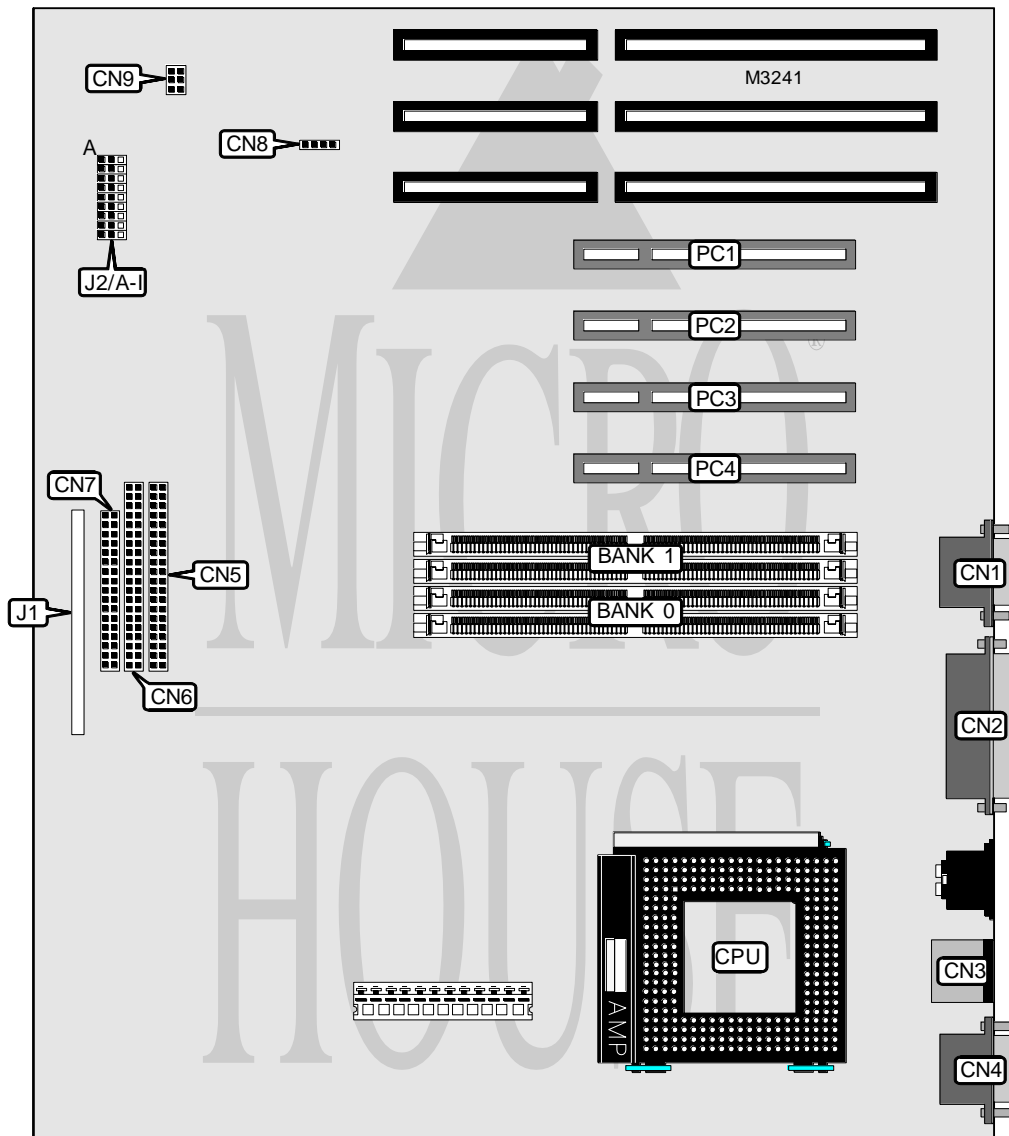

Continued on next page. . .

# ICL

## ERGOPRO P6/150

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 2	CN1	Floppy drive interface	CN7
Parallel port	CN2	IDE interface LED	CN8
PS/2 mouse port	CN3	Chassis fan power	CN9
Serial port 1	CN4	Front panel connector	J1
IDE interface 2	CN5	32-bit PCI slots	PC1 - PC4
IDE interface 1	CN6		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J2/D	Pins 1 & 2 closed
í Password normal operation	J2/E	Pins 1 & 2 closed
Password clear	J2/E	Pins 2 & 3 closed
í CMOS memory normal operation	J2/F	Pins 1 & 2 closed
CMOS memory clear	J2/F	Pins 2 & 3 closed
í Flash BIOS normal operation	J2/G	Pins 1 & 2 closed
Flash BIOS force flash load	J2/G	Pins 2 & 3 closed
í Boot block disabled	J2/H	Pins 1 & 2 closed
Boot block enabled	J2/H	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 32	None
16MB	(2) 1M x 32	(2) 1M x 32
16MB	(2) 2M x 32	None
32MB	(2) 2M x 32	(2) 2M x 32
32MB	(2) 4M x 32	None
64MB	(2) 4M x 32	(2) 4M x 32
64MB	(2) 8M x 32	None
128MB	(2) 8M x 32	(2) 8M x 32

Note: Board also accepts x 36 SIMMs.

DRAM SPEED CONFIGURATION	
Speed	J2/I
í 60ns	Pins 1 & 2 closed
70ns	Pins 2 & 3 closed

CACHE CONFIGURATION
Note: 256KB cache is on Pentium Pro CPU.

CPU SPEED CONFIGURATION			
Speed	J2/A	J2/B	J2/C
120MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
133MHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
150(s)MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
150MHz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
166MHz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed

