


# UNIDENTIFIED

## 386DX-33/40

<b>Processor</b>	80386DX/CX486DLC
<b>Processor Speed</b>	25/33/40MHz
<b>Chip Set</b>	OPTI
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	Unidentified
<b>BIOS</b>	AMI
<b>Dimensions</b>	220mm x 170mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX

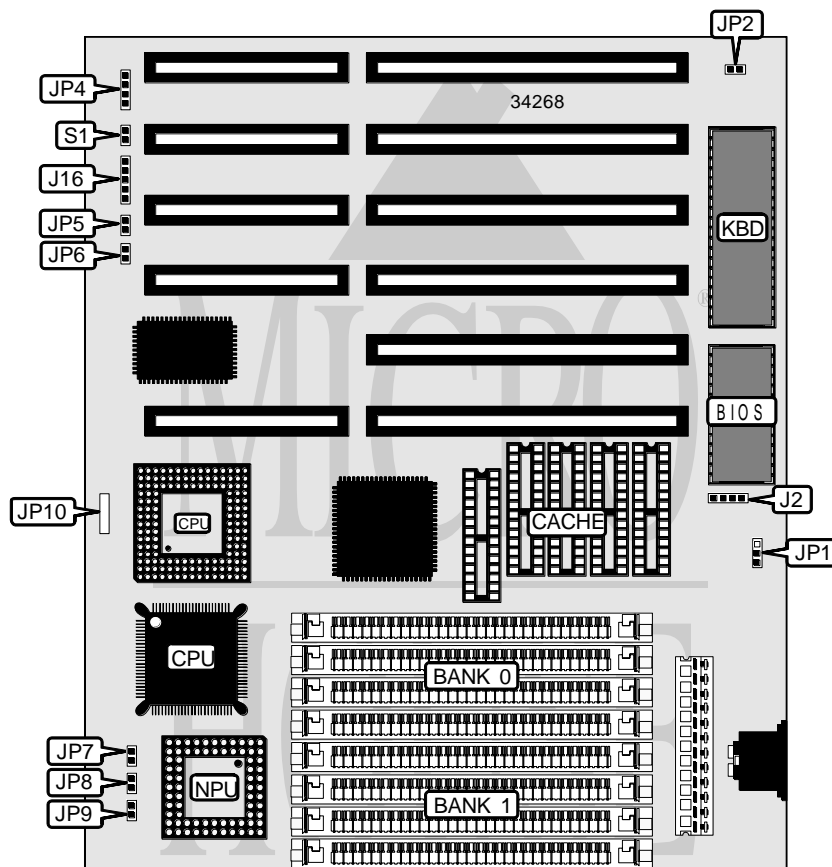

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	JP5
Power LED & keylock	J16	Turbo LED	JP6
Speaker	JP4	Reset switch	S1

Continued on next page. . .

UNIDENTIFIED  
386DX-33/40

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP1	Pins 2 & 3 closed
CMOS memory clear	JP1	Pins 1 & 2 closed
Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Factory configured - do not alter	JP10	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION
Note: The size of the cache unidentified.

CPU SPEED SELECTION			
Speed	JP7	JP8	JP9
25MHz	Open	Open	Closed
33MHz	Open	Closed	Open
40MHz	Closed	Closed	Open