


IBM® Personal Computer 300 GL System Board

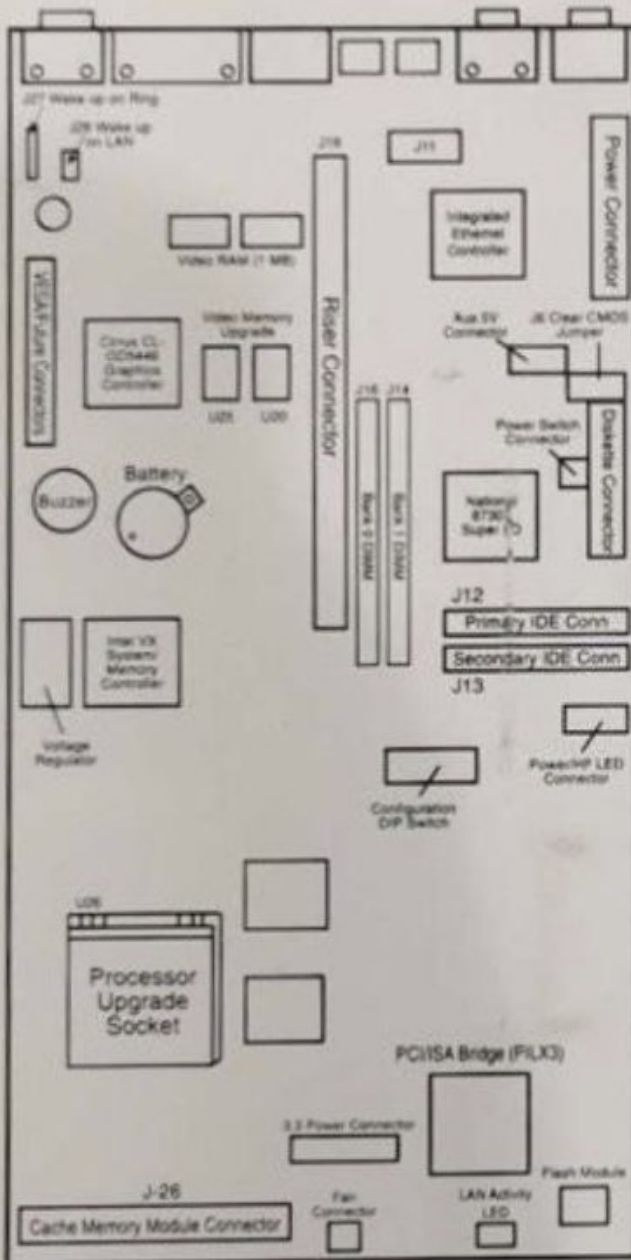

Switches

Bus/Microprocessor Speed (MHz)

75 MHz	90 MHz	100 MHz	120 MHz
ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6
133 MHz	160 MHz	180 MHz	200 MHz
ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6

ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	6 OFF ① Normal diskette operation
ON: 1 2 3 4 5 6 OFF: 1 2 3 4 5 6	6 ON Read only diskette operation

Password Jumper

J6

1 2 3 1 2 3	2-3 Erase power-on password and configuration
1 2 3 1 2 3	1-2 Normal ①

Memory

Total Memory	Bank 0	Bank 1
8	8*	0
16	8	8
16	16*	0
24	8	16
24	16	8
32	32*	0
32	16	16
40	8	32
48	16	32
64	32	32
64	64	0
72	8	64
80	16	64
96	32	64
128	64	64

NOTES:

- ① Factory Setting
- ② Table 14: SDRAM/EDO DIMM Upgrade Configurations
- *Shipped Memory configurations

Refer to installing options manual for device installation and additional memory configurations

