



COMPAQ COMPUTER CORPORATION PROFESSIONAL WORKSTATION 5000

Device Type	Mainboard
Processor	Pentium Pro
Processor Speed	200MHz
Chip Set	Unidentified
Video Chip Set	Matrox
Maximum Onboard Memory	512MB (EDO & SDRAM supported)
Maximum Video Memory	8MB
Cache	256KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	VRM connectors (2), riser slot
NPU Options	None

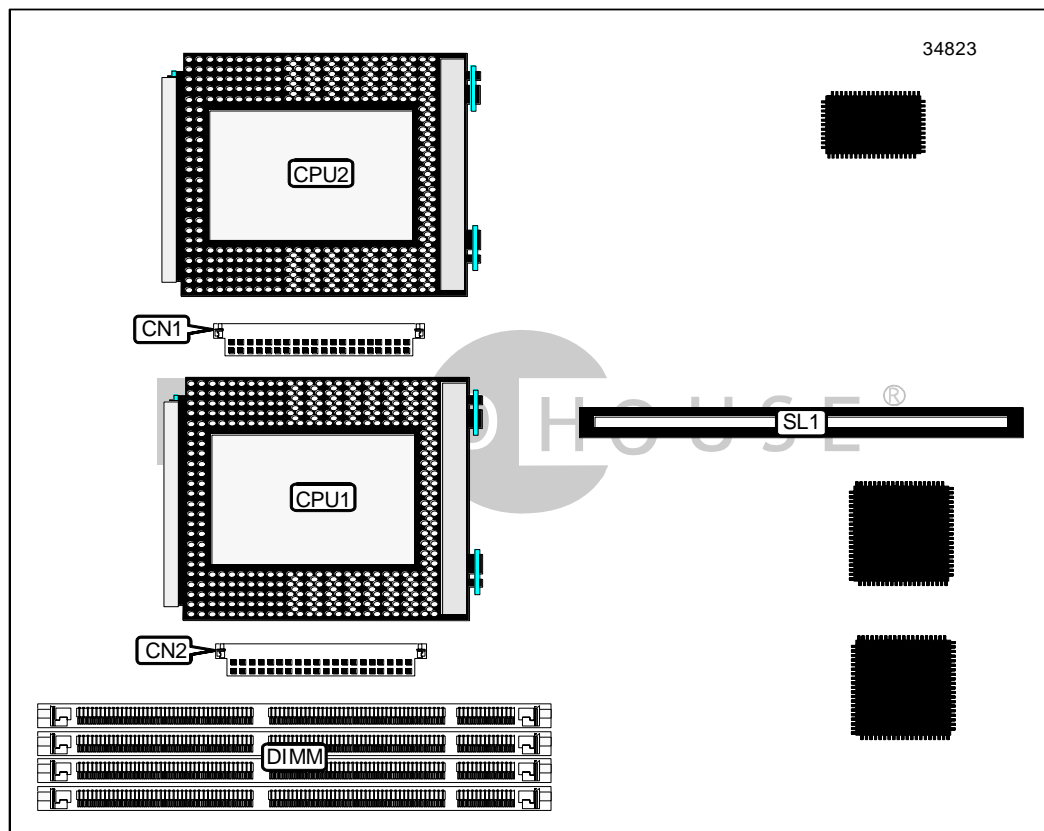

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PROFESSIONAL WORKSTATION 5000

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VRM connector 2	CN1	Riser slot	SL1
VRM connector 1	CN2		
Note: The types of all other connectors are unidentified.			

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password enabled	SW1/1	Off
Password disabled	SW1/1	On

DIMM CONFIGURATION		
Size	Bank 0	Bank 1
32MB	(1) 4M x 64	None
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 32M x 64	None
256MB	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64

CACHE CONFIGURATION
Note: 256KB cache is located on the Pentium Pro CPU.

VIDEO MEMORY CONFIGURATION
Note: Board accepts 2MB/6MB/8MB of video memory. The location and chip type is unidentified.

CPU CORE FREQUENCY SELECTION				
Core frequency	SW1/3	SW1/4	SW1/5	SW1/6
2/4	On	On	On	On
2/5	On	On	On	Off
í 2/6	On	On	Off	On
2/7	On	On	Off	Off
2/8	On	Off	On	On
2/9	On	Off	On	Off
2/10	On	Off	Off	On
2/11	On	Off	Off	Off

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
PROFESSIONAL WORKSTATION 5000

... continued from previous page

CPU BUS SPEED SELECTION	
Speed	SW1/2
í 60MHz	Off
66MHz	On

BATTERY SELECTION	
Setting	E1
External battery connection	Pins 1 – 4 closed
External battery jumper	Pins 5 & 6 closed
í Internal battery jumper	Pins 6 & 7 closed