
## IBM CORPORATION PS/2 MODEL P70 386

Processor
Processor Speed
Chip Set
Max. Onboard DRAM
Cache
BIOS
Dimensions
I/O Options

80386DX 16/20MHz None 8MB None IBM 330mm x 218mm Serial port, parallel port, pointing device connector, hard drive connector, floppy drive interface, plasma display port, external storage device connector 80387

**NPU Options** 

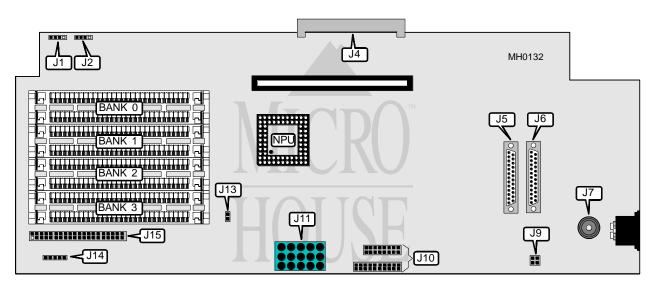

CONNECTIONS						
Purpose	Location	Purpose	Location			
Speaker	J1	External storage device	19			
Battery	J2	Hard drive interface	J10			
Plasma display port	J4	Power supply	J11			
Parallel port	J5	Indicator	J14			
Serial port	J6	Floppy drive interface	J15			
Pointing device	J7					

Continued on next page . . .

## IBM CORPORATION PS/2 MODEL P70 386

... continued from previous page

USER CONFIGURABLE SETTINGS					
Function	Jumper	Position			
í Password enabled	J13	Open			
Password disabled	J13	Closed			

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Bank 3		
2MB	(2) 1M x 9	NONE	NONE	NONE		
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE		
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE		
8MB	(2) 1M x 9					
Note: Onboard memory does not have to be installed in order to use memory expansion cards.						