


NCR CORPORATION

CLASS 3302 - 80386SX

Processor	80386SX
Speed	16MHz
Chip Set	C & T Neat
Max. Onboard DRAM	5MB
BIOS	Unidentified
Cache	None
Dimensions	330mm x 218mm
I/O Options	Serial ports (2), parallel port, floppy drive interface, IDE interface, 16-bit VGA port
NPU Options	80387SX

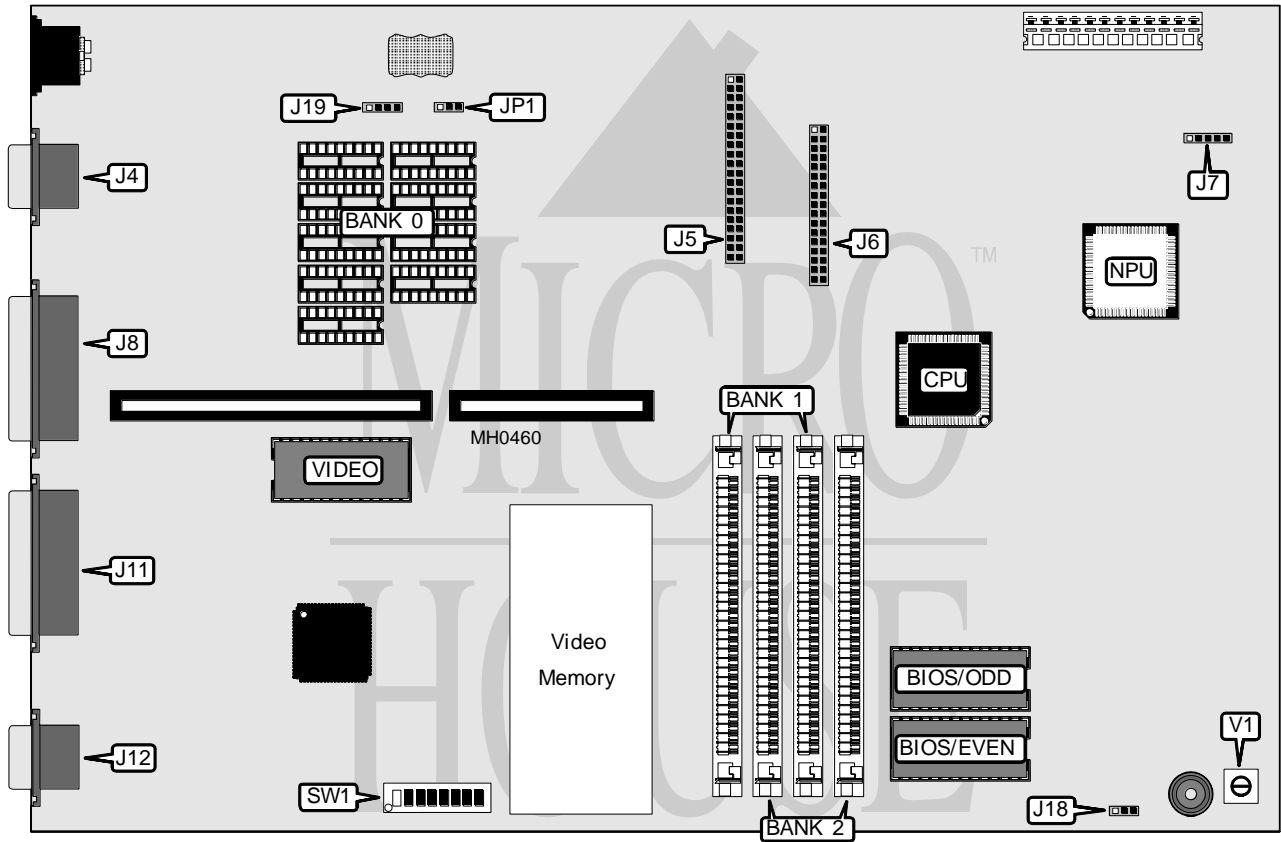

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	J4	Serial port 2	J8
IDE interface	J5	Parallel port	J11
Floppy drive interface	J6	16-bit VGA port	J12
Power LED & Keylock	J7		

Continued on next page . . .

NCR CORPORATION
CLASS 3302 - 80386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Monitor type select color	J18	pins 1 & 2 closed
Monitor type select monochrome	J18	pins 2 & 3 closed
í CMOS memory normal operation	J19	pins 3 & 4 closed
CMOS memory clear	J19	pins 1 & 2 closed
í Factory configured - do not alter	JP1	pins 2 & 3 closed
í Monitor type select VGA enabled	SW1/1	On
Monitor type select VGA disabled	SW1/1	Off
í Monitor type select standard VGA	SW1/2	Off
Monitor type select Multisync	SW1/2	On
í BIOS type select AT	SW1/3	Off
BIOS type select PS/2	SW1/3	On
í Parallel port enabled	SW1/4	On
Parallel port disabled	SW1/4	Off
í Serial port (J3/COM1) enabled	SW1/5	On
Serial port (J3/COM1) disabled	SW1/5	Off
í Serial port (J4/COM2) enabled	SW1/6	On
Serial port (J4/COM2) disabled	SW1/6	Off
í Floppy drive interface enabled	SW1/7	On
Floppy drive interface disabled	SW1/7	Off
í IDE interface enabled	SW1/8	On
IDE interface disabled	SW1/8	Off
Volume control	V1	Variable

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
1MB	(9) 411000	NONE	NONE
3MB	(9) 411000	(2) 1M x 9	NONE
5MB	(9) 411000	(2) 1M x 9	(2) 1M x 9

Note: Bank locations are unidentified. Bank 0 memory chip sizes are unidentified.