
## UNITRON COMPUTER, INC. 486SX-25

Processor	80
Processor Speed	25
Chip Set	U
Max. Onboard DRAM	32
Cache	No
BIOS	Ph
Dimensions	33
I/O Options	No
NPU Options	No

304865X 25MHz JMC 32MB None Phoenix 330mm x 218mm None None

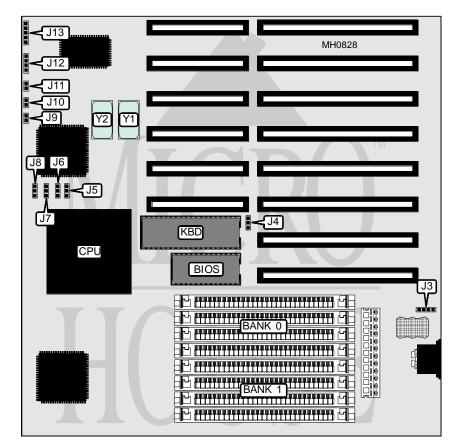

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J3	Turbo LED	J11	
Reset switch	19	Speaker	J12	
Turbo switch	J10	Power LED & keylock	J13	

Continued on next page . . .

## UNITRON COMPUTER, INC. 486SX-25

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	J4	pins 2 & 3 closed		
Monitor type select monochrome	J4	pins 1 & 2 closed		
í Factory configured - do not alter	J8	N/A		

	DRAM CONFIGURATION	
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION			
Туре	J5	Je	J7
80486SX	pins 2 & 3 closed	pins 2 & 3 closed	Open
80487SX	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
80486DX	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed