
SYNTAX

386 CACHE-25/33

80386DX **Processor Processor Speed** 25/33MHz C & T Chip Set Max. Onboard DRAM 8MB Cache 64KB **BIOS** AMI

Dimensions 355.6mm x 304mm I/O Options 32-bit memory card slot

NPU Options 80387DX

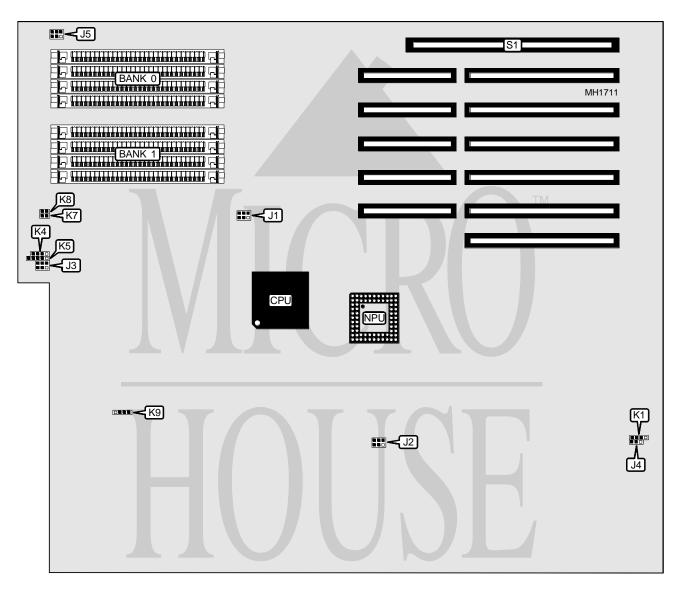

Continued on next page . . .

SYNTAX

386 CACHE-25/33

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	K1	Reset switch	K7	
Speaker	K4	Turbo LED	К8	
Power LED & keylock	K5	32-bit memory card slot	S1	

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í BIOS type select 27128	J1	pins 2 & 3 and 5 & 6		
BIOS type select 27256	J1	pins 1 & 2 and 5 & 6		
BIOS type select 27512	J1	pins 1 & 2 and 4 & 5		
í NPU enabled	J2	pins 1 & 2 and 4 & 5		
NPU disabled	J2	pins 2 & 3 and 5 & 6		
í Monitor type select color	J4	pins 2 & 3 closed		
Monitor type select monochrome	J4	pins 1 & 2 closed		
í Extended memory installed	J5	pins 2 & 3 and 5 & 6		
Extended memory not installed	J5	pins 1 & 2 and 4 & 5		
í Factory configured - do not alter	К9	N/A		
Note: Pins designated should be in the closed position.				

DRAM CONFIGURATION					
Size	Bank 0	Bank 1	J3		
1MB	(4) 256K x 9	NONE	pins 1 & 4 and 2 & 5		
2MB	(4) 256K x 9	(4) 256K x 9	pins 2 & 5 closed		
4MB	(4) 1M x 9	NONE	pins 1 & 2 closed		
8MB	(4) 1M x 9	(4) 1M x 9	Open		
Note: Pins designated	should be in the closed position	1.			

	CACHE CONFIGURATION
Note:	This motherboard comes with 64KB of cache and is not user configurable.