


LEADING EDGE PRODUCTS, INC. MODEL D2/PLUS

Processor	80286 (Exact location unknown)
Processor Speed	12MHz
Chip Set	Unidentified
Max. Onboard DRAM	4MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port (2)
NPU Options	80287

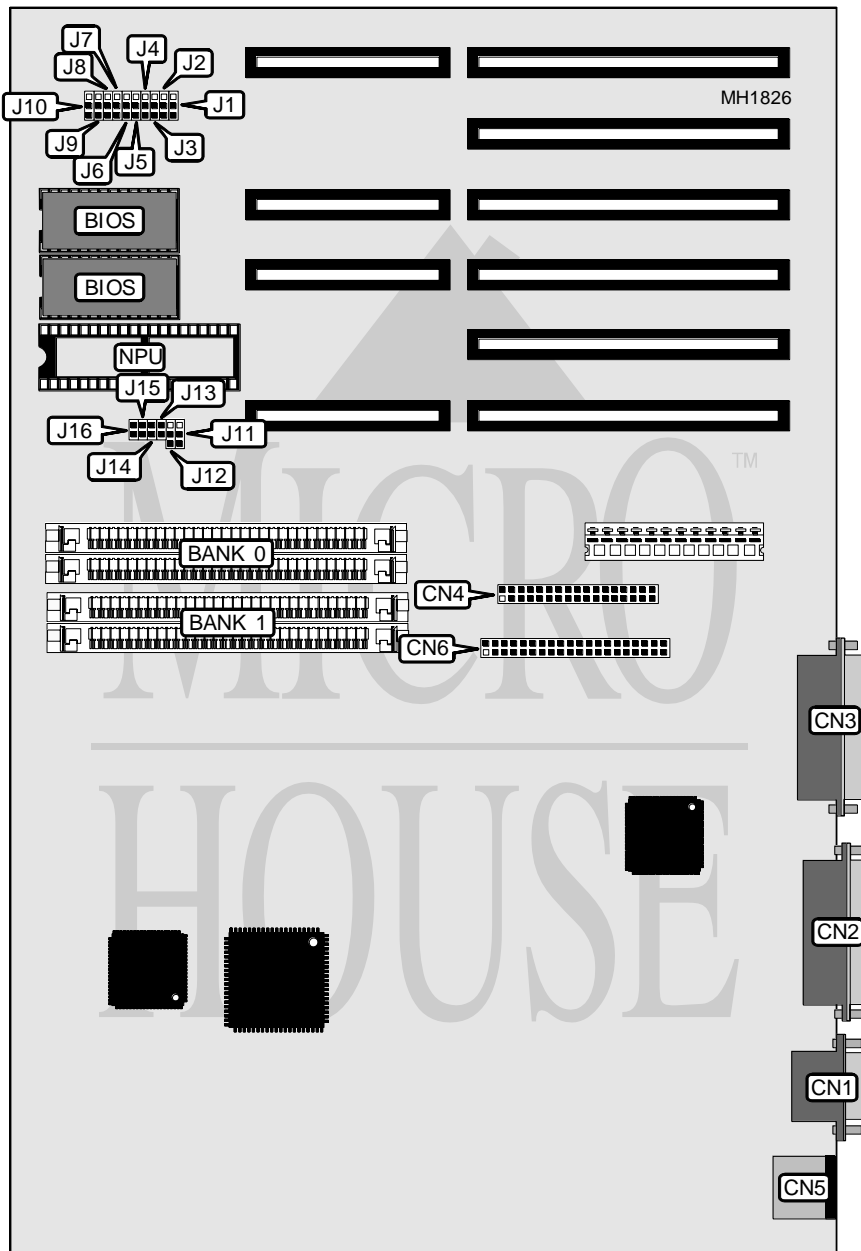

Continued next page...

LEADING EDGE PRODUCTS, INC.

MODEL D2/PLUS

... continued from previous page.

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	Internal keyboard connector	J11
Serial port 2	CN2	Speed & keylock connector	J12
Parallel port	CN3	Power LED & reset	J13
Floppy drive interface	CN4	Speaker	J14
Bus mouse port	CN5	External battery	J15
IDE interface	CN6	IDE interface LED	J16

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J1	pins 2 & 3 closed
Monitor type select monochrome	J1	pins 1 & 2 closed
í Parallel port enabled	J2	pins 1 & 2 closed
Parallel port disabled	J2	pins 2 & 3 closed
í Floppy drive interface enabled	J7	pins 1 & 2 closed
Floppy drive interface disabled	J7	pins 2 & 3 closed
í Bus mouse port enabled	J8	pins 1 & 2 closed
Bus mouse port disabled	J8	pins 2 & 3 closed
í IDE interface enabled	J9	pins 1 & 2 closed
IDE interface disabled	J9	pins 2 & 3 closed
í Factory configured - do not alter	J10	N/A

SERIAL PORT CONFIGURATION					
Port 1	Port 2	J3	J4	J5	J6
í COM1	í COM2	pins 1 & 2	pins 1 & 2	pins 1 & 2	pins 1 & 2
COM3	COM4	pins 1 & 2	pins 1 & 2	pins 2 & 3	pins 2 & 3
COM1	Disabled	pins 1 & 2	pins 2 & 3	pins 1 & 2	N/A
Disabled	COM2	pins 2 & 3	pins 1 & 2	N/A	pins 1 & 2
COM3	Disabled	pins 1 & 2	pins 2 & 3	pins 2 & 3	N/A
Disabled	COM4	pins 2 & 3	pins 1 & 2	N/A	pins 2 & 3
Disabled	Disabled	pins 2 & 3	pins 2 & 3	N/A	N/A

Note: Pins designated should be in the closed position.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9