


IBM CORPORATION PS/2 MODEL 25-286

Processor	80286
Processor Speed	10MHz
Chip Set	Intel
Max. Onboard DRAM	Dependant upon the memory & optional memory packs installed in J9 & J10.
Cache	None
BIOS	IBM
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, hard drive interface, parallel port, PS/2 mouse port, riser card, serial port, video port
NPU Options	80287

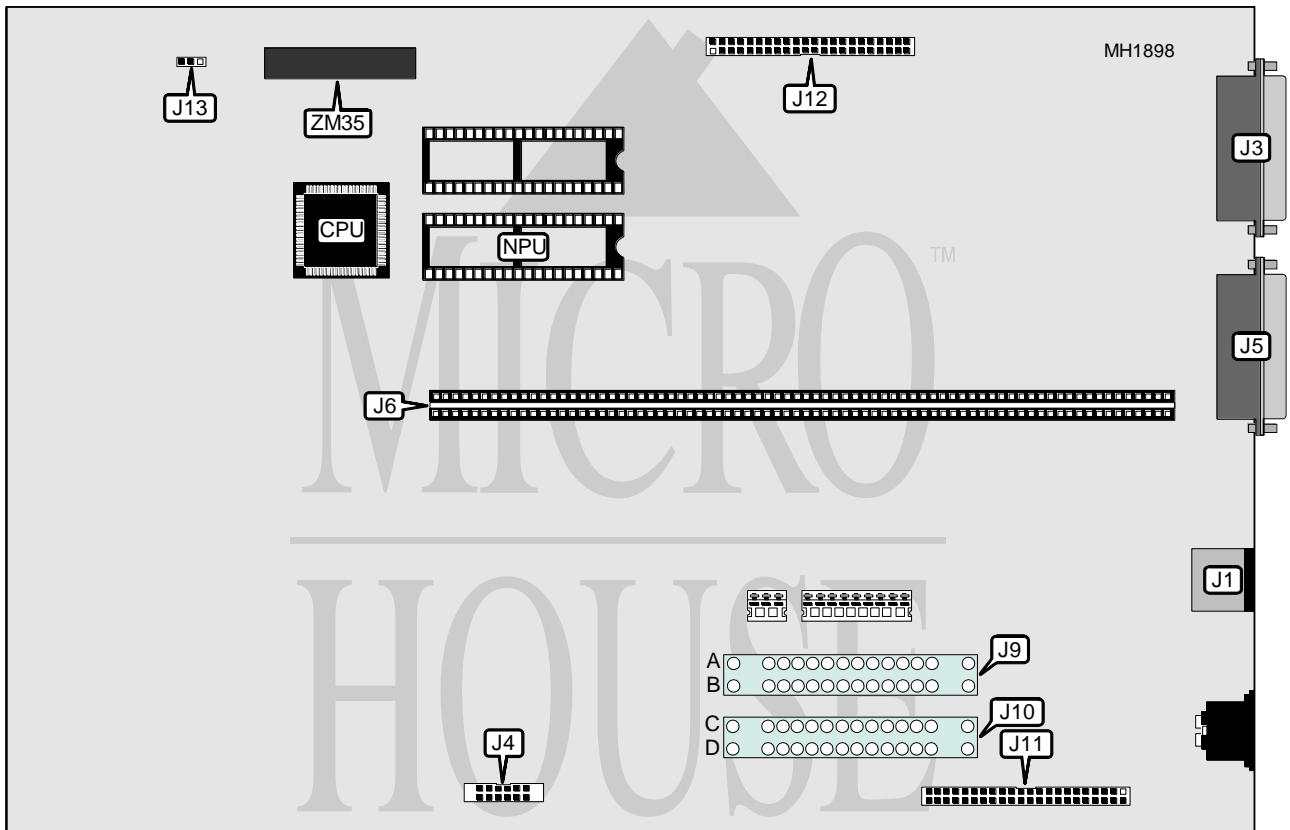

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	J1	Memory pack	J9
Parallel port	J3	Memory pack	J10
Video port	J4	Hard drive interface	J11
Serial port	J5	Floppy drive interface	J12
Riser card slot	J6	Clock module connector	ZM35

Continued next page...

IBM CORPORATION

PS/2 MODEL 25 - 286

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory clear	J13	pins 1 & 2 closed
CMOS memory normal operation	J13	pins 2 & 3 closed

DRAM CONFIGURATION
Dependant upon the memory packs or optional memory packs installed in J9 & J10.