


# IBM CORPORATION PS/2 MODEL 35/40

<b>Processor</b>	80386SX
<b>Processor Speed</b>	20MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	IBM
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, hard drive connector, memory module cards (3), parallel port, PS/2 mouse port, riser card, serial port, video port
<b>NPU Options</b>	80387SX

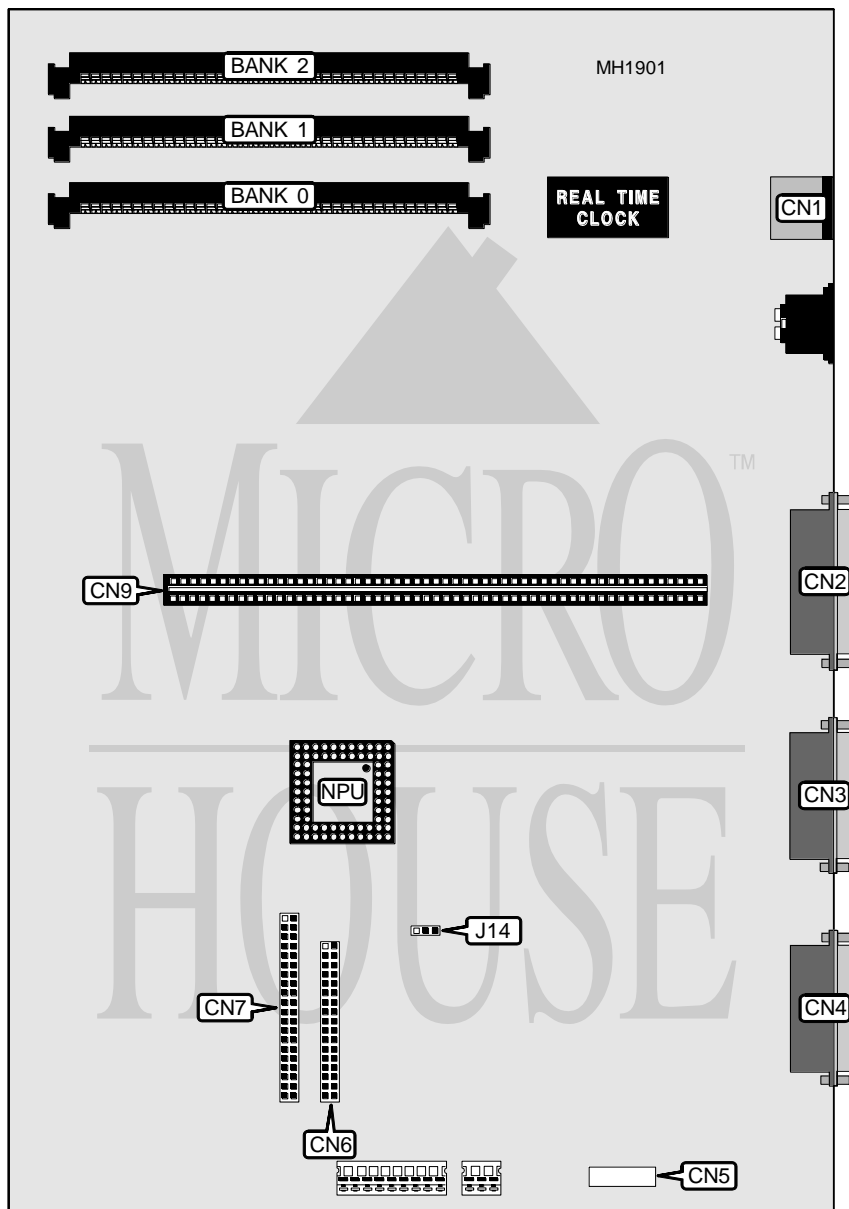

Continued next page...

# IBM CORPORATION

## PS/2 MODEL 35/40

... continued from previous page.

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Diagnostics port	CN5
Parallel port	CN2	Floppy drive interface	CN6
Serial port	CN3	Hard drive connector	CN7
Video port	CN4	Riser card slot	CN9

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J14	pins 1 & 2 closed
CMOS memory clear	J14	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
1MB	(1) 256K x 36	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE
5MB	(1) 256K x 36	(1) 1M x 36	NONE
6MB	(1) 256K x 36	(1) 256K x 36	(1) 1M x 36
6MB	(1) 256K x 36	(1) 1M x 36	(1) 256K x 36
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE
9MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
9MB	(1) 256K x 36	(1) 1M x 36	(1) 1M x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	NONE	NONE