


# UNIDENTIFIED

## 386SX 20/25

<b>Processor</b>	80386SX
<b>Processor Speed</b>	20/25MHz
<b>Chip Set</b>	OPTI
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	32KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

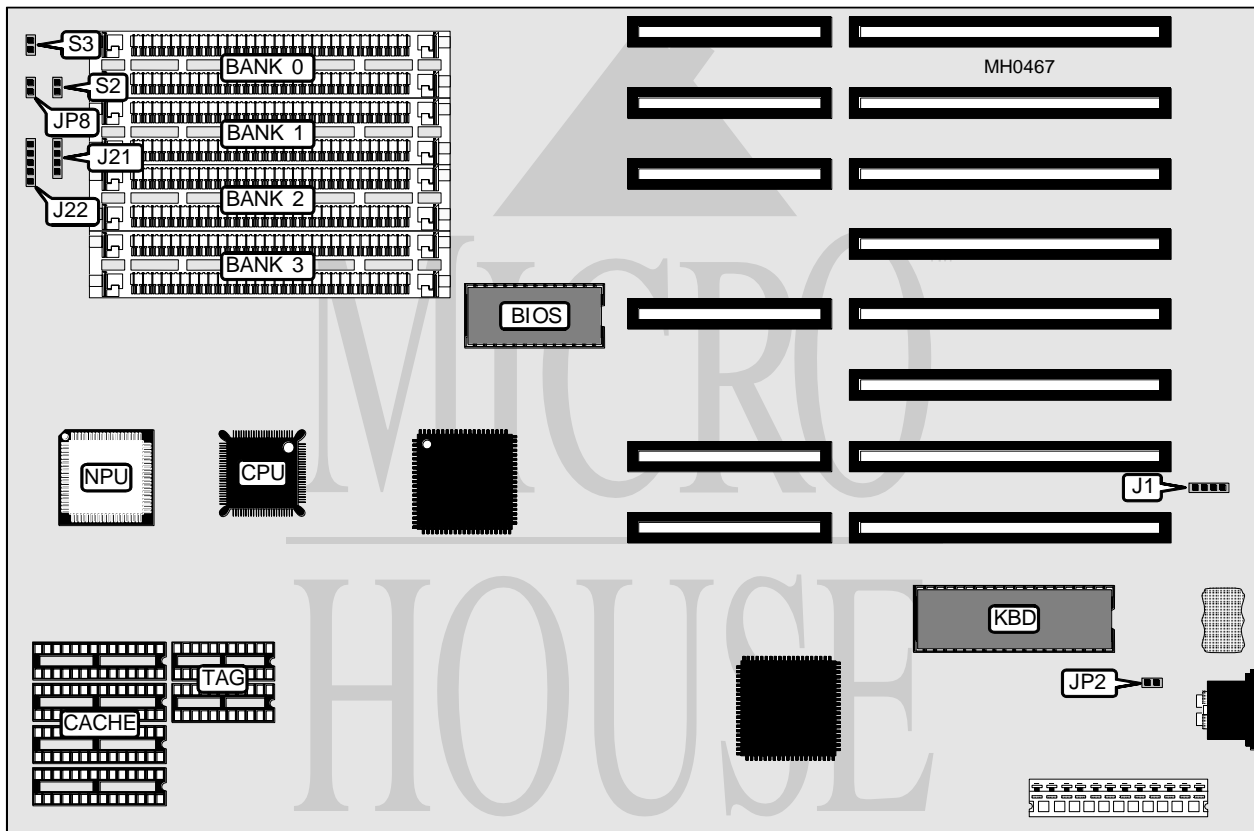

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	JP8
Speaker	J21	Reset switch	S2
Power LED & keylock	J22	Turbo switch	S3

Continued on next page . . .

# UNIDENTIFIED

## 386SX 20/25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
32KB	(4) 8K x 8	(2) 16K x 4