


GIGA-BYTE TECHNOLOGY CO., LTD.

GA - 5861S

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	Intel
Max. Onboard DRAM	192MB
Cache	256/512KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit PCI bus slots (4)
NPU Options	None

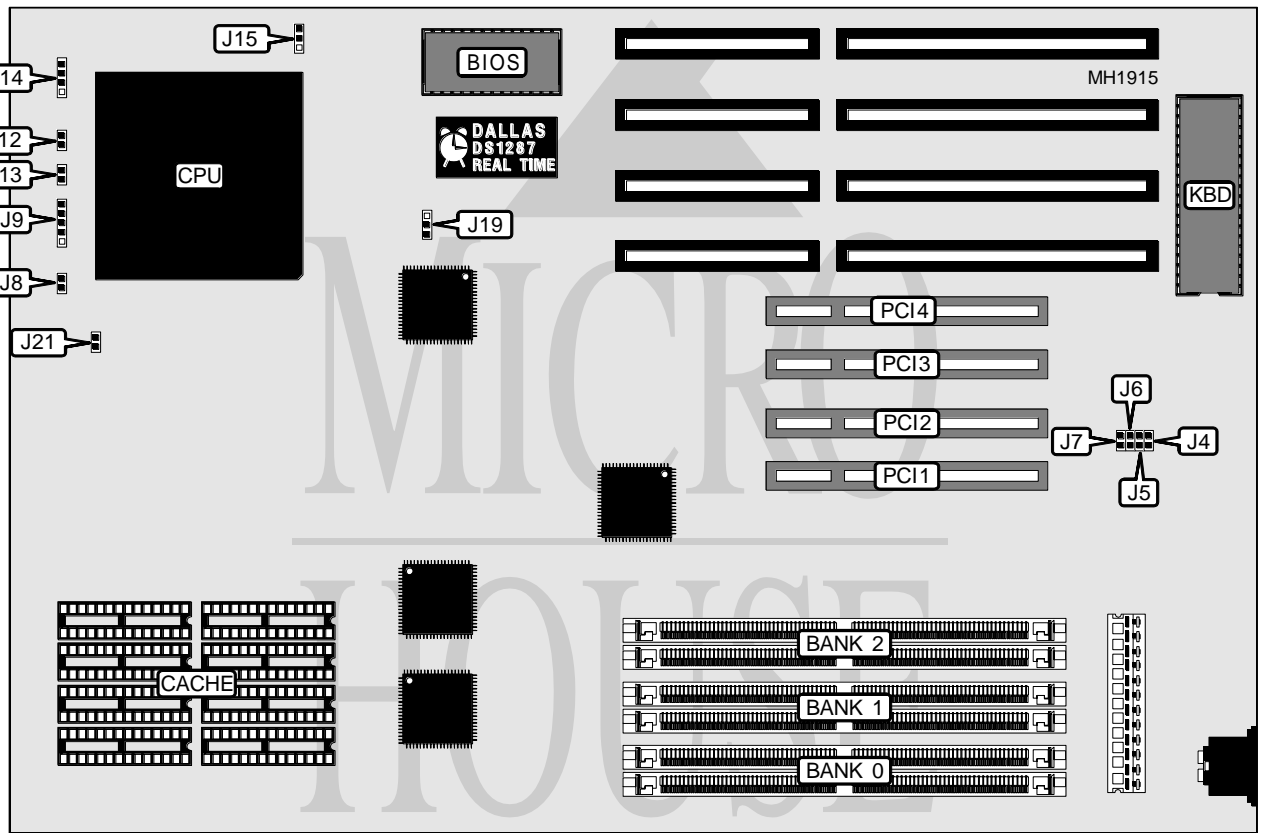

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J8	CPU cooling fan	J21
Power LED & keylock	J9	32-bit PCI bus slot	PCI1
Turbo switch	J12	32-bit PCI bus slot	PCI2
Turbo LED	J13	32-bit PCI bus slot	PCI3
Speaker	J14	32-bit PCI bus slot	PCI4

Continued next page...

GIGA-BYTE TECHNOLOGY CO., LTD.
GA - 5861S

... continued from previous page

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(2) 256K x 36	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE
4MB	(2) 512K x 36	NONE	NONE
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36	NONE
8MB	(2) 1M x 36	NONE	NONE
12MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
12MB	(2) 1M x 36	(2) 512K x 36	NONE
16MB	(2) 2M x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 1M x 36	NONE
16MB	(2) 1M x 36	(2) 512K x 36	(2) 512K x 36
20MB	(2) 1M x 36	(2) 1M x 36	(2) 512K x 36
20MB	(2) 2M x 36	(2) 512K x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36
24MB	(2) 2M x 36	(2) 1M x 36	NONE
32MB	(2) 4M x 36	NONE	NONE
32MB	(2) 2M x 36	(2) 2M x 36	NONE
32MB	(2) 2M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36	NONE
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 8M x 36	NONE	NONE
64MB	(2) 4M x 36	(2) 4M x 36	NONE
64MB	(2) 4M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36	NONE
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	NONE
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Cache	J15
256KB	(8) 32K x 8	pins 1 & 2 closed
512KB	(8) 64K x 8 or (8) 128K x 8	pins 2 & 3 closed

Continued on next page ...

GIGA-BYTE TECHNOLOGY CO., LTD.
GA - 5861S

... continued from previous page

CPU SPEED CONFIGURATION	
Type	J19
60MHz	pins 2 & 3 closed
66MHz	pins 1 & 2 closed

PCI IRQ SELECT				
IRQ	J4	J5	J6	J7
9	Open	Open	Open	Closed
10	Open	Open	Closed	Open
11	Open	Closed	Open	Open
14	Closed	Open	Open	Open