


COMPAQ COMPUTER CORPORATION

DESKPRO 486/25 (MODEL 001532)

Processor	80486DX
Processor Speed	25MHz
Chip Set	Compaq
Max. Onboard DRAM	100MB (on system memory card)
Cache	None
BIOS	Compaq
Dimensions	332mm x 333mm
I/O Options	32-bit system memory card slot, floppy drive interfaces (2)
NPU Options	4167

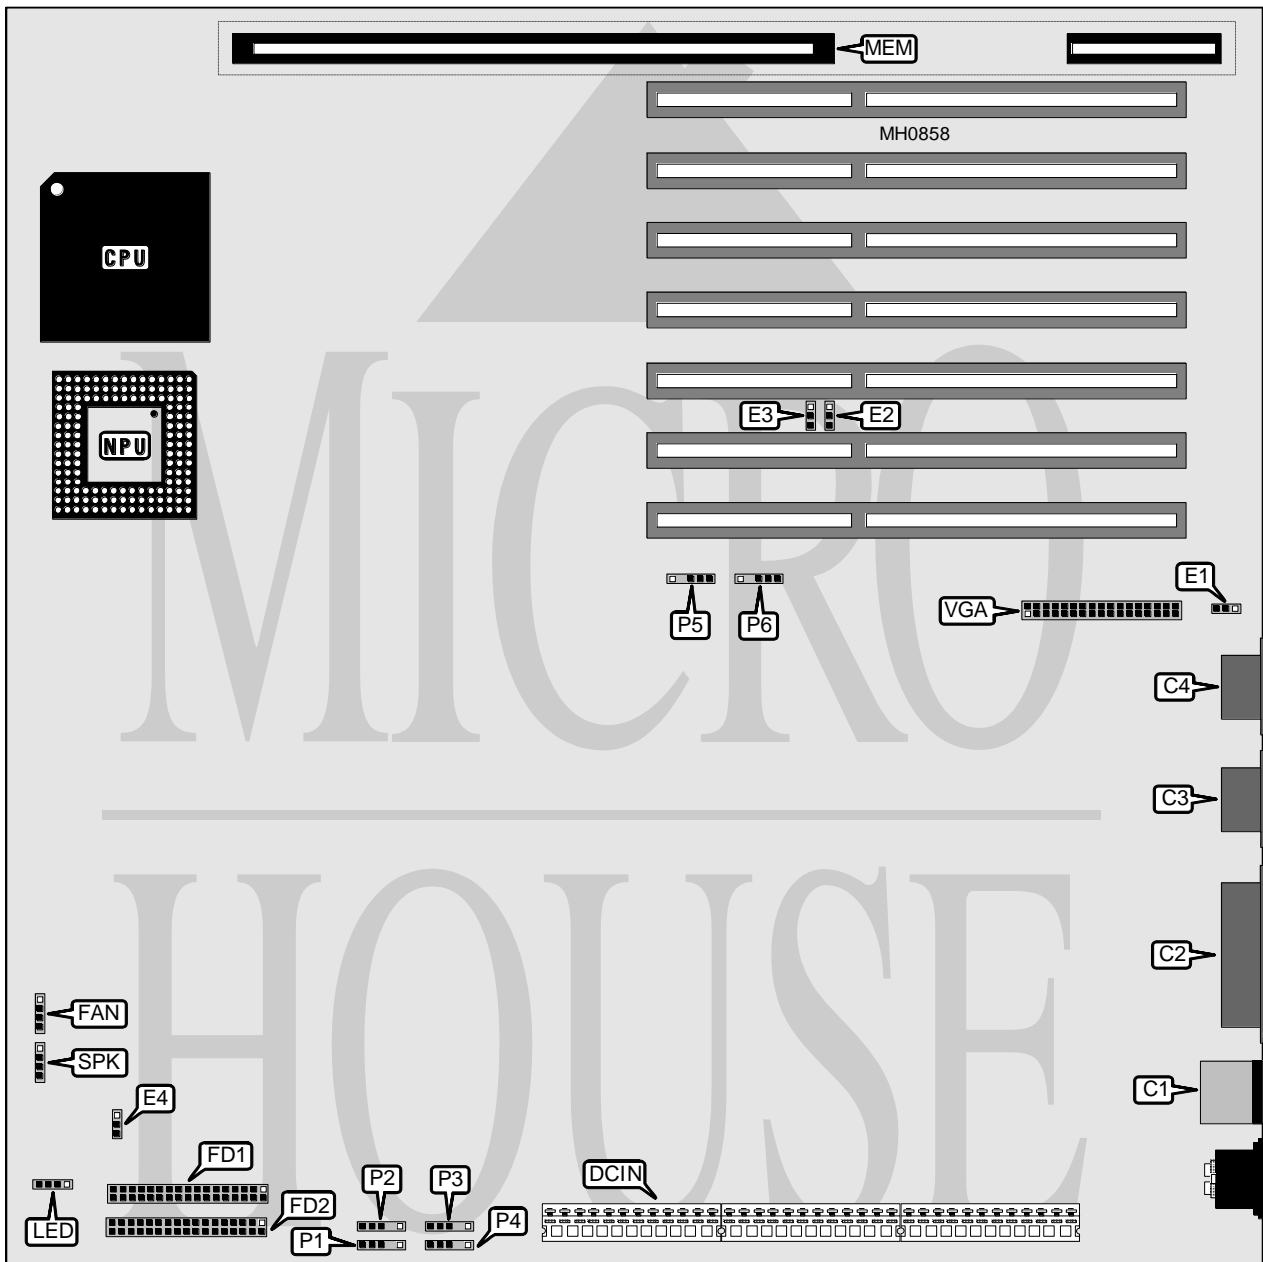

Continued on next page . . .

COMPAQ COMPUTER CORPORATION

DESKPRO 486/25 (MODEL 001532)


... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Bus mouse	C1	3.5 inch floppy drive interface	FD2
Parallel port	C2	Drive access LED	LED
Serial port 1	C3	System memory card	MEM
VGA port	C4	Drive power	P1-P6
Main power	DCIN	Speaker	SPK
Fan power	FAN	VGA feature interface	VGA
5.25 inch floppy drive interface	FD1		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Maintenance mode disabled	E1	pins 2 & 3 closed
Maintenance mode enabled	E1	pins 1 & 2 closed
í Password check at power-on enabled	E2	pins 2 & 3 closed
Password check at power-on disabled	E2	pins 1 & 2 closed
í VGA port enabled	E3	pins 2 & 3 closed
VGA port disabled	E3	pins 1 & 2 closed
í Local bus hidden refresh enabled	E4	pins 2 & 3 closed
Local bus hidden refresh disabled	E4	pins 1 & 2 closed

Note: Not all jumpers are present on all board revisions.

SYSTEM MEMORY CARD (MODEL 1508)

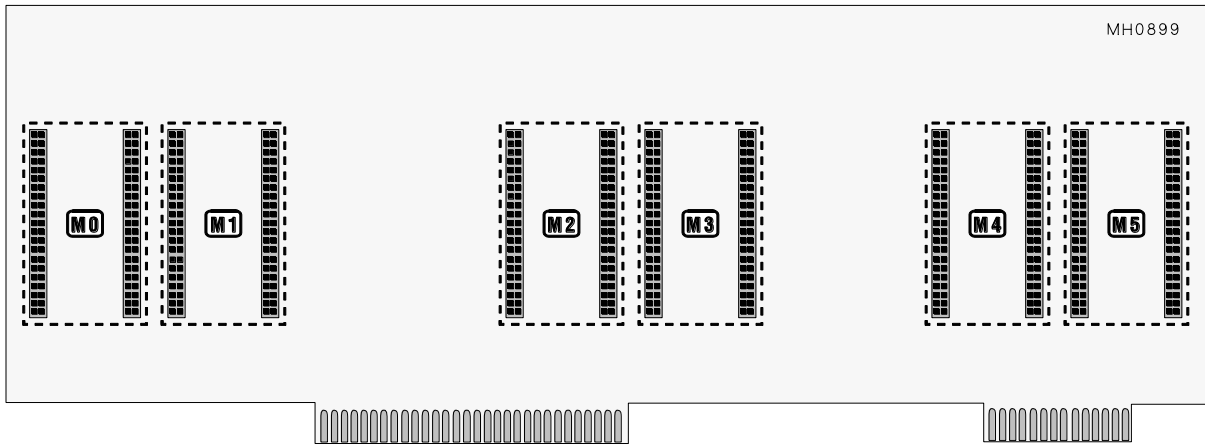

DRAM CONFIGURATION						
Size	M0	M1	M2	M3	M4	M5
4MB	NONE	NONE	NONE	NONE	NONE	NONE
6MB	2MB	NONE	NONE	NONE	NONE	NONE
8MB	2MB	2MB	NONE	NONE	NONE	NONE
10MB	2MB	2MB	2MB	NONE	NONE	NONE
12MB	2MB	2MB	2MB	2MB	NONE	NONE
12MB	8MB	NONE	NONE	NONE	NONE	NONE
12MB	8MB	-----	NONE	NONE	NONE	NONE

COMPAQ COMPUTER CORPORATION
 DESKPRO 486/25® (MODEL 001532)
 SYSTEM MEMORY CARD(MODEL 001508 CONT.)

... continued from previous page

DRAM CONFIGURATION (CON'T)						
Size	M0	M1	M2	M3	M4	M5
14MB	2MB	2MB	2MB	2MB	2MB	NONE
14MB	8MB	2MB	NONE	NONE	NONE	NONE
14MB	8MB	-----	2MB	NONE	NONE	NONE
16MB	2MB	2MB	2MB	2MB	2MB	2MB
16MB	8MB	2MB	2MB	NONE	NONE	NONE
16MB	8MB	-----	2MB	2MB	NONE	NONE
18MB	8MB	2MB	2MB	2MB	NONE	NONE
18MB	8MB	-----	2MB	2MB	2MB	NONE
20MB	8MB	2MB	2MB	2MB	2MB	NONE
20MB	8MB	-----	2MB	2MB	2MB	2MB
20MB	8MB	8MB	NONE	NONE	NONE	NONE
20MB	8MB	-----	8MB	NONE	NONE	NONE
20MB	8MB	-----	8MB	-----	NONE	NONE
22MB	8MB	2MB	2MB	2MB	2MB	2MB
22MB	8MB	8MB	2MB	NONE	NONE	NONE
22MB	8MB	-----	8MB	2MB	NONE	NONE
22MB	8MB	-----	8MB	-----	2MB	NONE
24MB	8MB	8MB	2MB	2MB	NONE	NONE
24MB	8MB	-----	8MB	2MB	2MB	NONE
24MB	8MB	-----	8MB	-----	2MB	2MB
26MB	8MB	8MB	2MB	2MB	2MB	NONE
26MB	8MB	-----	8MB	2MB	2MB	2MB
28MB	8MB	8MB	2MB	2MB	2MB	2MB
28MB	8MB	8MB	8MB	NONE	NONE	NONE
28MB	8MB	-----	8MB	8MB	NONE	NONE
28MB	8MB	-----	8MB	-----	8MB	NONE
28MB	8MB	-----	8MB	-----	8MB	-----
30MB	8MB	8MB	8MB	2MB	NONE	NONE
30MB	8MB	-----	8MB	8MB	2MB	NONE
30MB	8MB	-----	8MB	-----	8MB	2MB
32MB	8MB	8MB	8MB	2MB	2MB	NONE
32MB	8MB	-----	8MB	8MB	2MB	2MB
34MB	8MB	8MB	8MB	2MB	2MB	2MB
36MB	8MB	8MB	8MB	8MB	NONE	NONE
36MB	8MB	-----	8MB	8MB	8MB	NONE
36MB	8MB	-----	8MB	-----	8MB	8MB
36MB	32MB	-----	NONE	NONE	NONE	NONE
38MB	8MB	8MB	8MB	8MB	2MB	NONE
38MB	8MB	-----	8MB	8MB	8MB	2MB
38MB	32MB	-----	2MB	NONE	NONE	NONE
40MB	8MB	8MB	8MB	8MB	2MB	2MB
40MB	32MB	-----	2MB	2MB	NONE	NONE

Continued on next page . . .

COMPAQ COMPUTER CORPORATION
DESKPRO 486/25® (MODEL 001532)
SYSTEM MEMORY CARD(MODEL 001508 CONT.)

... continued from previous page

DRAM CONFIGURATION (CON'T)						
Size	M0	M1	M2	M3	M4	M5
44MB	8MB	8MB	8MB	8MB	8MB	NONE
44MB	8MB	-----	8MB	8MB	8MB	8MB
44MB	32MB	-----	2MB	2MB	2MB	2MB
44MB	32MB	-----	8MB	NONE	NONE	NONE
44MB	32MB	-----	8MB	-----	NONE	NONE
46MB	8MB	8MB	8MB	8MB	8MB	2MB
46MB	32MB	-----	8MB	2MB	NONE	NONE
46MB	32MB	-----	8MB	-----	2MB	NONE
52MB	8MB	8MB	8MB	8MB	8MB	8MB
52MB	32MB	-----	8MB	8MB	NONE	NONE
52MB	32MB	-----	8MB	-----	8MB	-----
54MB	32MB	-----	8MB	8MB	2MB	NONE
54MB	32MB	-----	8MB	8MB	-----	2MB
56MB	32MB	-----	8MB	8MB	2MB	2MB
60MB	32MB	-----	8MB	8MB	8MB	NONE
60MB	32MB	-----	8MB	-----	8MB	8MB
62MB	32MB	-----	8MB	8MB	8MB	2MB
68MB	32MB	-----	8MB	8MB	8MB	8MB
68MB	32MB	-----	32MB	-----	NONE	NONE
70MB	32MB	-----	32MB	-----	2MB	NONE
72MB	32MB	-----	32MB	-----	2MB	2MB
76MB	32MB	-----	32MB	-----	8MB	NONE
76MB	32MB	-----	32MB	-----	8MB	-----
78MB	32MB	-----	32MB	-----	8MB	2MB
84MB	32MB	-----	32MB	-----	8MB	8MB
100MB	32MB	-----	32MB	-----	32MB	-----

Note: The system memory card is factory configured with 4MB of DRAM on board.
 The system memory card uses proprietary memory modules, some require only one module space on the memory board, while others require two. In the cases where a double size module is used, the following space is marked with "-----", designating that space as occupied.