


# ACER, INC.

## KMX-AL25/33SX

<b>Processor</b>	80386SX/CX486SLC
<b>Processor Speed</b>	16/20/25/33MHz
<b>Chip Set</b>	ALI
<b>Max. Onboard DRAM</b>	16MB
<b>Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	178mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

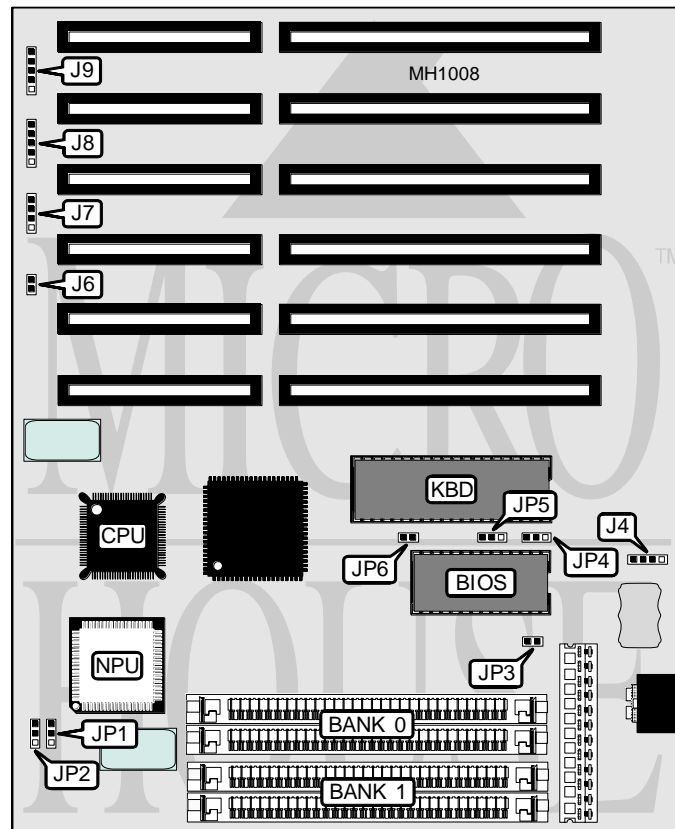

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo LED & Turbo switch	J8
Reset switch	J6	Power LED & keylock	J9
Speaker	J7		

Continued on next page . . .

ACER, INC.

KMX - AL25/33SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU mode select synchronous with CPU	JP2	pins 1 & 2 closed
NPU mode select asynchronous with CPU	JP2	pins 2 & 3 closed
í RTC type select 146818	JP3	Open
RTC type select 1287	JP3	Closed
í Monitor type select color	JP4	pins 1 & 2 closed
Monitor type select monochrome	JP4	pins 2 & 3 closed
í Parity check disabled	JP6	Closed
Parity check enabled	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9

CPU SPEED CONFIGURATION		
Speed	JP1	JP5
16MHz	pins 1 & 2 closed	pins 1 & 2 closed
20MHz	pins 2 & 3 closed	pins 1 & 2 closed
25MHz	pins 1 & 2 closed	pins 2 & 3 closed
33MHz	pins 2 & 3 closed	pins 2 & 3 closed