


MECER CORPORATION B 9 2 0

Processor	Pentium
Processor Speed	60/66MHz
Chip Set	ALI
Max. Onboard DRAM	256MB
Cache	256/512/1024KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit PCI bus slots (4), green PC connector
NPU Options	None

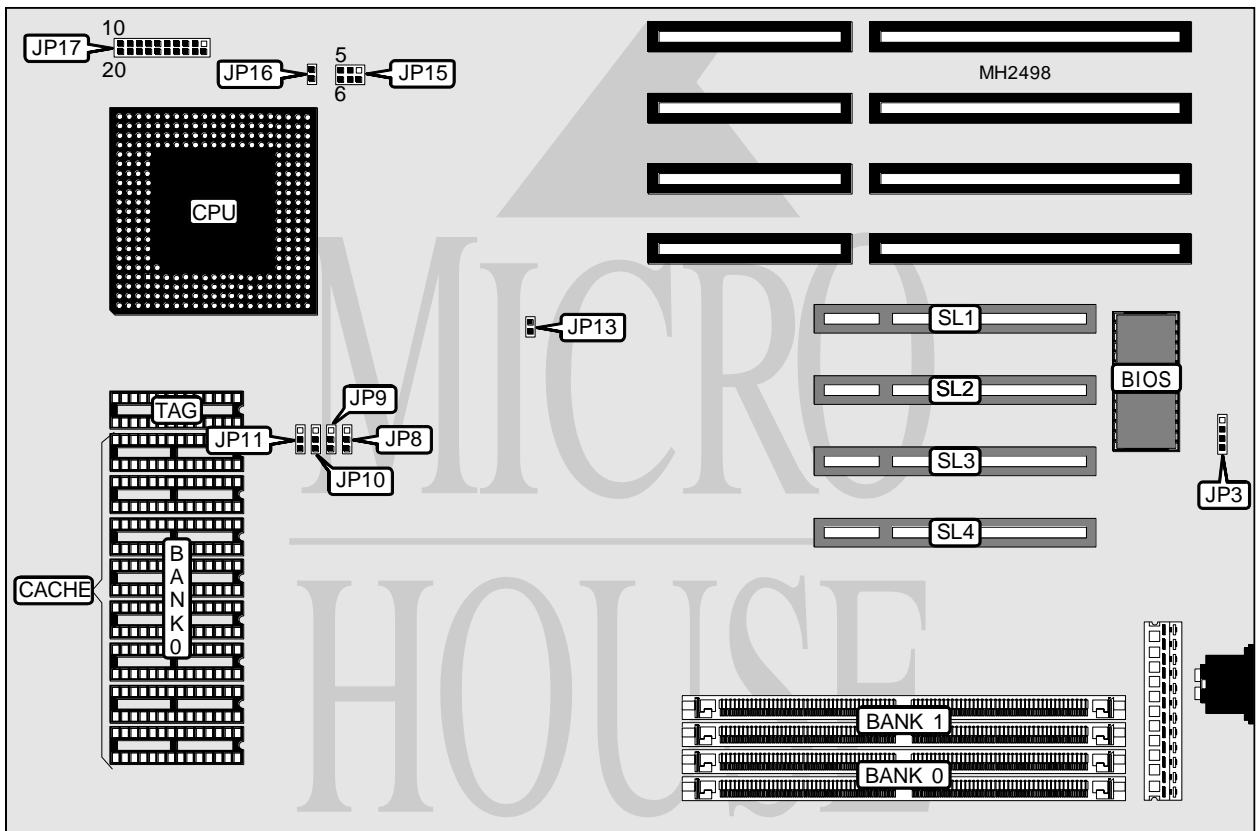

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP3	Turbo LED	JP17 pins 11 - 12
Green PC connector	JP16	Reset switch	JP17 pins 19 - 20
Power LED & keylock	JP17 pins 1 - 5	32-bit PCI slots	SL1 - SL4
Speaker	JP17 pins 7 - 10		

Continued on next page. . .

MECER CORPORATION

B920

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	JP3	pins 1 & 2 closed
Battery type select external	JP3	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
6MB	(2) 256K x 36	(2) 512K x 36
6MB	(2) 512K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
10MB	(2) 1M x 36	(2) 256K x 36
12MB	(2) 512K x 36	(2) 1M x 36
12MB	(2) 1M x 36	(2) 512K x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
18MB	(2) 256K x 36	(2) 2M x 36
18MB	(2) 2M x 36	(2) 256K x 36
20MB	(2) 512K x 36	(2) 2M x 36
20MB	(2) 2M x 36	(2) 512K x 36
24MB	(2) 1M x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36
34MB	(2) 4M x 36	(2) 256K x 36
36MB	(2) 512K x 36	(2) 4M x 36
36MB	(2) 4M x 36	(2) 512K x 36
40MB	(2) 1M x 36	(2) 4M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 8M x 36
66MB	(2) 8M x 36	(2) 256K x 36
68MB	(2) 512K x 36	(2) 8M x 36
68MB	(2) 8M x 36	(2) 512K x 36
72MB	(2) 1M x 36	(2) 8M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 2M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36

Continued on next page...

MECER CORPORATION

B 9 2 0

... continued from previous page

DRAM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
96MB	(2) 4M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	NONE
130MB	(2) 256K x 36	(2) 16M x 36
130MB	(2) 16M x 36	(2) 256K x 36
132MB	(2) 512K x 36	(2) 16M x 36
132MB	(2) 16M x 36	(2) 512K x 36
134MB	(2) 1M x 36	(2) 16M x 36
136MB	(2) 16M x 36	(2) 1M x 36
144MB	(2) 2M x 36	(2) 16M x 36
144MB	(2) 16M x 36	(2) 2M x 36
160MB	(2) 4M x 36	(2) 16M x 36
160MB	(2) 16M x 36	(2) 4M x 36
232MB	(2) 8M x 36	(2) 16M x 36
232MB	(2) 16M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36

CACHE CONFIGURATION		
Size	Bank 0	TAG
256KB	(8) 32K x 8	(1) 8K x 8
512KB	(8) 64K x 8	(1) 32K x 8
1MB	(8) 128K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP8	JP9	JP10	JP11
256KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
512KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
1MB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION		
Speed	JP13	JP15
60MHz	Closed	pins 5 & 6 closed
66MHz	Closed	pins 3 & 4, 5 & 6 closed