


DTK COMPUTER, INC.

PAM-00521/QUIN-52

Processor	Pentium
Processor Speed	75/90/100MHz
Chip Set	Intel
Max. Onboard DRAM	384MB
Cache	256/512KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (4)
NPU Options	None

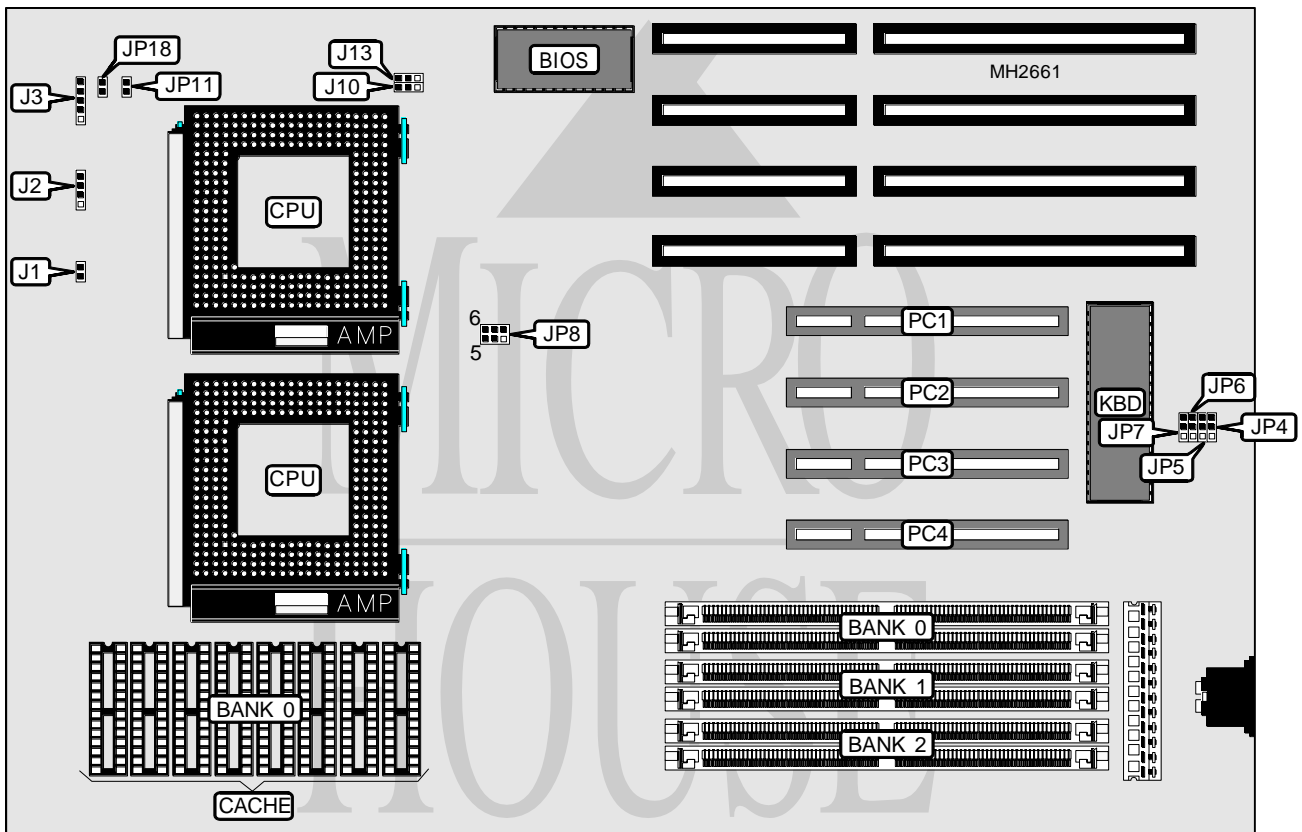

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	J1	Turbo LED	JP18
Speaker	J2	32-bit PCI slots	PC1 - PC4
Power LED & keylock	J3		

Continued on next page. . .

DTK COMPUTER, INC.
PAM-00521/QUIN-52

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP11	N/A

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
2MB	(2) 256K x 36	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 1M x 36	NONE	NONE
10MB	(2) 1M x 36	(2) 256K x 36	NONE
12MB	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36
12MB	(2) 256K x 36	(2) 1M x 36	(2) 256K x 36
16MB	(2) 1M x 36	(2) 1M x 36	NONE
18MB	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36
18MB	(2) 256K x 36	(2) 1M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	NONE	NONE
34MB	(2) 4M x 36	(2) 256K x 36	NONE
36MB	(2) 4M x 36	(2) 256K x 36	(2) 256K x 36
36MB	(2) 256K x 36	(2) 4M x 36	(2) 256K x 36
40MB	(2) 1M x 36	(2) 4M x 36	NONE
42MB	(2) 4M x 36	(2) 1M x 36	(2) 256K x 36
42MB	(2) 1M x 36	(2) 4M x 36	(2) 256K x 36
64MB	(2) 4M x 36	(2) 4M x 36	NONE
66MB	(2) 4M x 36	(2) 4M x 36	(2) 256K x 36
72MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
72MB	(2) 4M x 36	(2) 4M x 36	(2) 1M x 36
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 16M x 36	NONE	NONE
130MB	(2) 16M x 36	(2) 256K x 36	NONE
132MB	(2) 16M x 36	(2) 256K x 36	(2) 256K x 36
132MB	(2) 256K x 36	(2) 16M x 36	(2) 256K x 36
136MB	(2) 1M x 36	(2) 16M x 36	NONE
138MB	(2) 16M x 36	(2) 1M x 36	(2) 256K x 36
138MB	(2) 1M x 36	(2) 16M x 36	(2) 256K x 36
138MB	(2) 256K x 36	(2) 16M x 36	(2) 1M x 36
144MB	(2) 1M x 36	(2) 16M x 36	(2) 1M x 36
160MB	(2) 4M x 36	(2) 16M x 36	NONE
162MB	(2) 16M x 36	(2) 4M x 36	(2) 256K x 36
162MB	(2) 4M x 36	(2) 16M x 36	(2) 256K x 36
162MB	(2) 256K x 36	(2) 16M x 36	(2) 4M x 36
162MB	(2) 256K x 36	(2) 16M x 36	(2) 4M x 36
168MB	(2) 16M x 36	(2) 4M x 36	(2) 1M x 36
168MB	(2) 4M x 36	(2) 16M x 36	(2) 1M x 36

Continued on next page...

DTK COMPUTER, INC.
PAM-00521/QUIN-52

... continued from previous page

DRAM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
168MB	(2) 1M x 36	(2) 16M x 36	(2) 4M x 36
192MB	(2) 4M x 36	(2) 16M x 36	(2) 4M x 36
192MB	(2) 4M x 36	(2) 16M x 36	(2) 4M x 36
256MB	(2) 16M x 36	(2) 16M x 36	NONE
258MB	(2) 256K x 36	(2) 16M x 36	(2) 16M x 36
264MB	(2) 1M x 36	(2) 16M x 36	(2) 16M x 36
264MB	(2) 16M x 36	(2) 16M x 36	(2) 1M x 36
264MB	(2) 1M x 36	(2) 16M x 36	(2) 16M x 36
288MB	(2) 4M x 36	(2) 16M x 36	(2) 16M x 36
288MB	(2) 16M x 36	(2) 16M x 36	(2) 4M x 36
288MB	(2) 16M x 36	(2) 16M x 36	(2) 4M x 36
288MB	(2) 4M x 36	(2) 16M x 36	(2) 16M x 36
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36

CACHE CONFIGURATION	
Size	Bank 0
256KB	(8) 32K x 8
512KB	(8) 64K x 8

CACHE JUMPER CONFIGURATION		
Size	J10	J13
256KB	pins 1 & 2 closed	pins 2 & 3 closed
512KB	pins 2 & 3 closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION (MX8315)	
Speed	JP8
75MHz	pins 1 & 2 closed
90MHz	pins 3 & 4 closed
100MHz	pins 1 & 2, 5 & 6 closed

CPU SPEED CONFIGURATION (IMI466)	
Speed	JP8
75MHz	pins 1 & 2 closed
90MHz	pins 1 & 2, 5 & 6 closed
100MHz	pins 1 & 2, 3 & 4, 5 & 6 closed

CPU SPEED CONFIGURATION (ADV9107-03)	
Speed	JP8
75MHz	pins 1 & 2, 5 & 6 closed
90MHz	pins 3 & 4 closed
100MHz	pins 1 & 2, 3 & 4 closed

Continued on next page. . .

DTK COMPUTER, INC.
PAM-00521/QUIN-52

... continued from previous page

PCI IRQ CONFIGURATION	
IRQ	JP4
IRQ9	pins 2 & 3 closed
IRQ14	pins 1 & 2 closed

PCI IRQ CONFIGURATION	
IRQ	JP5
IRQ10	pins 2 & 3 closed
IRQ15	pins 1 & 2 closed

PCI IRQ CONFIGURATION	
IRQ	JP6
IRQ11	pins 2 & 3 closed
IRQ12	pins 1 & 2 closed

PCI IRQ CONFIGURATION	
IRQ	JP7
IRQ14	pins 2 & 3 closed
IRQ5	pins 1 & 2 closed