


BEK-TRONIK TECHNOLOGY, INC.

BEK-3701

| | |
|--------------------------|--------------------------|
| Processor | AM386DX/80386DX/CX486DLC |
| Processor Speed | 25/33/40MHz |
| Chip Set | MXIC |
| Max. Onboard DRAM | 32MB |
| Cache | None |
| BIOS | AMI |
| Dimensions | 220mm x 220mm |
| I/O Options | None |
| NPU Options | 80387DX/CX487DLC |

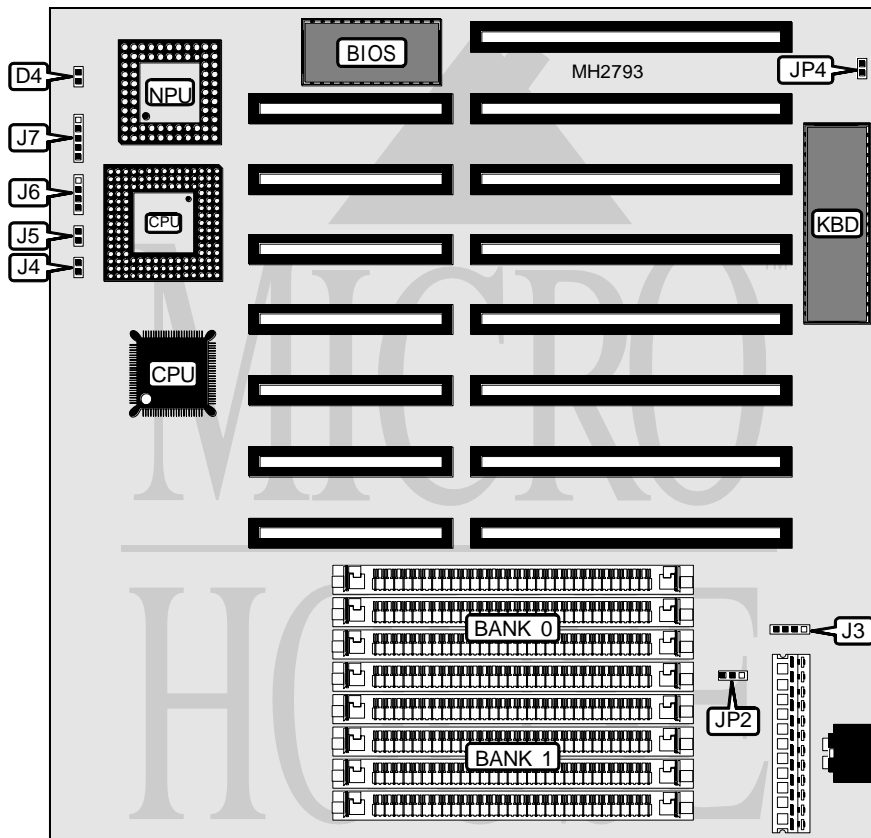

| CONNECTIONS | | | |
|------------------|----------|---------------------|----------|
| Purpose | Location | Purpose | Location |
| Turbo LED | D4 | Reset switch | J5 |
| External battery | J3 | Speaker | J6 |
| Turbo switch | J4 | Power LED & keylock | J7 |

Continued on next page. . .

BEK-TRONIK TECHNOLOGY, INC.
BEK-3701

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í CMOS memory normal operation | JP2 | pins 1 & 2 closed |
| CMOS memory clear | JP2 | pins 2 & 3 closed |
| í Monitor type select color | JP4 | Closed |
| Monitor type select monochrome | JP4 | Open |

| DRAM CONFIGURATION | | |
|--------------------|--------------|--------------|
| Size | Bank 0 | Bank 1 |
| 1MB | (4) 256K x 9 | NONE |
| 2MB | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | NONE |
| 5MB | (4) 1M x 9 | (4) 256K x 9 |
| 5MB | (4) 256K x 9 | (4) 1M x 9 |
| 8MB | (4) 1M x 9 | (4) 1M x 9 |
| 16MB | (4) 4M x 9 | NONE |
| 20MB | (4) 1M x 9 | (4) 4M x 9 |
| 20MB | (4) 4M x 9 | (4) 1M x 9 |
| 32MB | (4) 4M x 9 | (4) 4M x 9 |