


# DTK COMPUTER, INC.

## PTM-1000V2, ZERO AT 12

Processor	80286
Processor Speed	6/10MHz
Chip Set	None
Max. onboard DRAM	1MB
Cache	None
BIOS	DTK
Dimensions	220mm x 218mm
I/O Options	None
NPU Options	80287

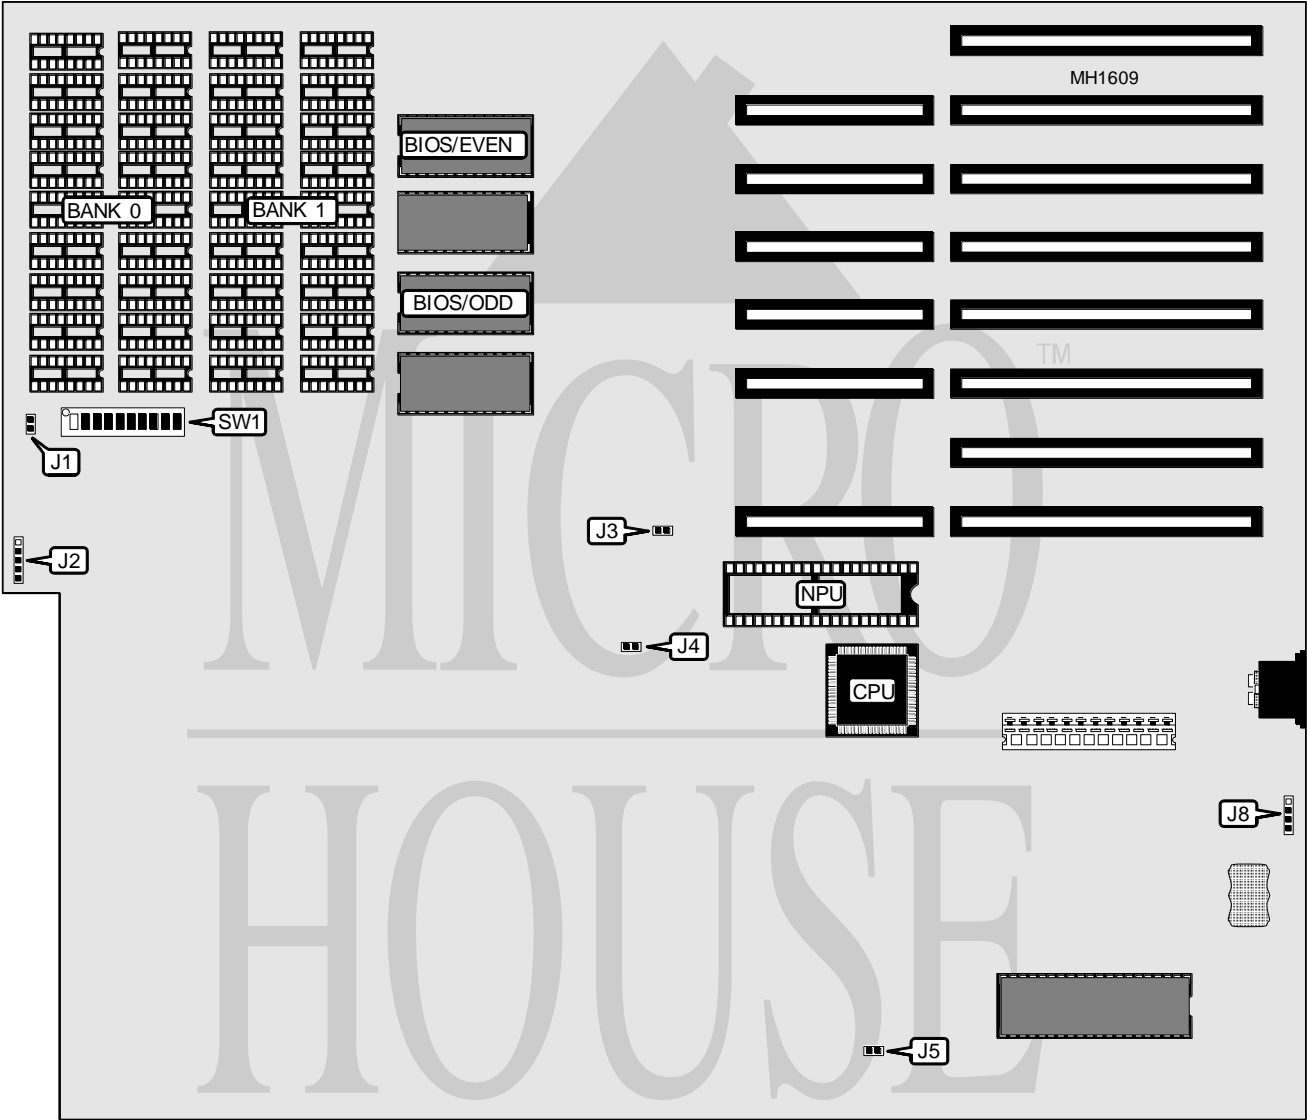

Continued on next page . . .

**DTK COMPUTER, INC.**  
**PTM - 1000V2, ZERO AT 12**

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Turbo LED	J4
Power LED & keylock	J2	Turbo switch	J5
Reset switch	J3	External battery	J8
Note: Turbo speed can also be activated by pressing Ctrl and Alt simultaneously.			

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Base memory select 640KB/ext memory = 384KB	SW1/2	On
Base memory select 512KB/ext memory = 512KB	SW1/2	Off
í Monitor type select color	SW1/6	On
Monitor type select monochrome	SW1/6	Off

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	SW1/3
512KB	(18) 41256	None	N/A
640KB	(18) 41256	(18) 4164	On
1MB	(18) 41256	(18) 41256	Off

DRAM WAIT STATE CONFIGURATION				
Bank 0	Bank 1	SW1/1	SW1/4	SW1/5
0 wait states	0 wait states	Off	Off	Off
0 wait states	1 wait state	Off	Off	On
1 wait state	0 wait states	Off	On	Off
1 wait state	1 wait state	Off	On	On
1 wait state	1 wait state	On	N/A	N/A

BIOS TYPE CONFIGURATION				
Type	SW1/7	SW1/8	SW1/9	SW1/10
27128	On	On	Off	Off
27256	Off	Off	On	On