


LEADING TECHNOLOGY 7000DX

Processor	80386DX
Processor Speed	25MHz
Chip Set	Unidentified
Max. Onboard DRAM	12MB (on external memory card)
Cache	Unidentified
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80387DX

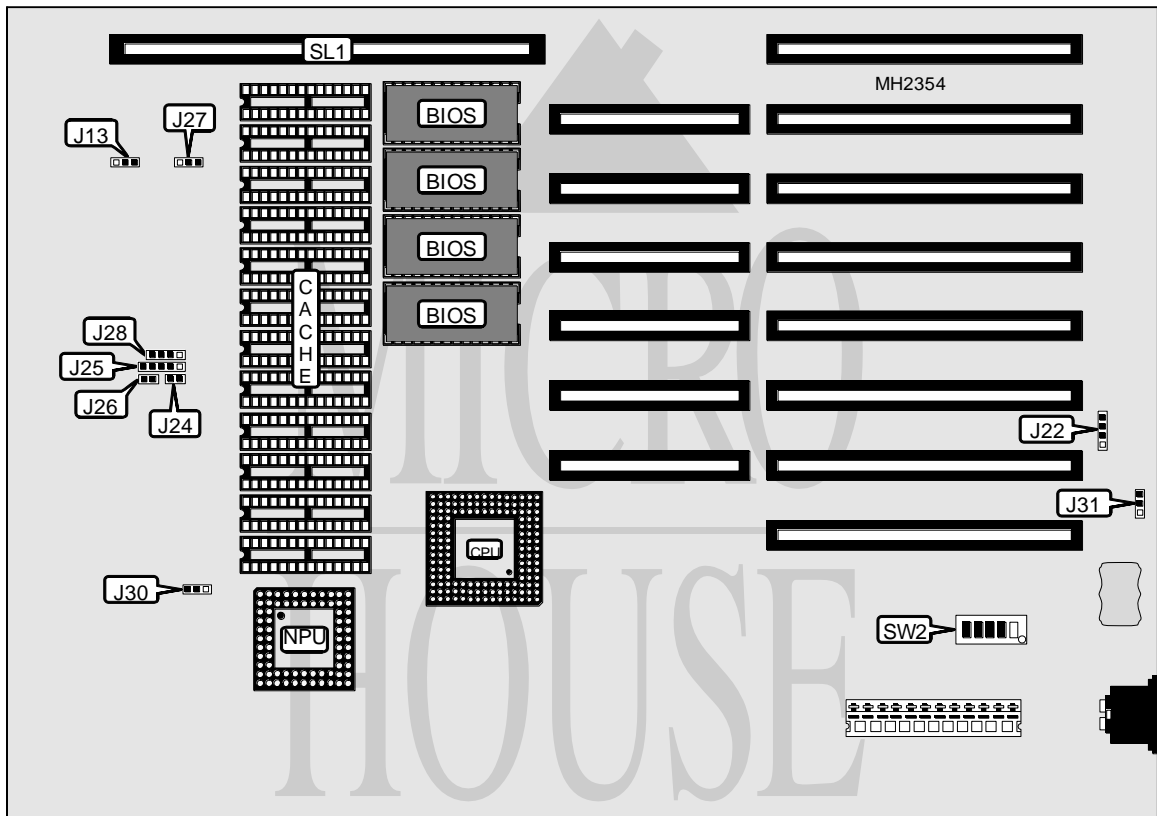

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J22	Turbo switch	J26
Reset switch	J24	Speaker	J28
Power LED & keylock	J25	32-bit external memory card	SL1

Continued on next page. . .

LEADING TECHNOLOGY 7000DX


... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í BIOS type select 27256	J13	pins 1 & 2 closed
BIOS type select 27128/2764	J13	pins 2 & 3 closed
í Cache enabled	J27	pins 2 & 3 closed
Cache disabled	J27	pins 1 & 2 closed
í Clock speed select low	J30	pins 2 & 3 closed
Clock speed select high	J30	pins 1 & 2 closed
í Battery type select internal	J31	pins 1 & 2 closed
Battery type select external	J31	pins 2 & 3 closed
í On board EGA BIOS enabled (32-bit access)	SW2/1	On
BIOS on EGA enabled (8-bit access)	SW2/1	Off
í I/O bus cache enabled	SW2/2	On
I/O bus cache disabled	SW2/2	Off
í NPU disabled	SW2/3	On
NPU enabled	SW2/3	Off
í Monitor type select monochrome/EGA/VGA	SW2/5	Off
Monitor type select CGA	SW2/5	On

CACHE CONFIGURATION

Note: The cache sizes and configurations are unidentified by the manufacturer.

CPU SPEED CONFIGURATION	
Speed	SW2/4
6/8MHz	On
10/25MHz	Off

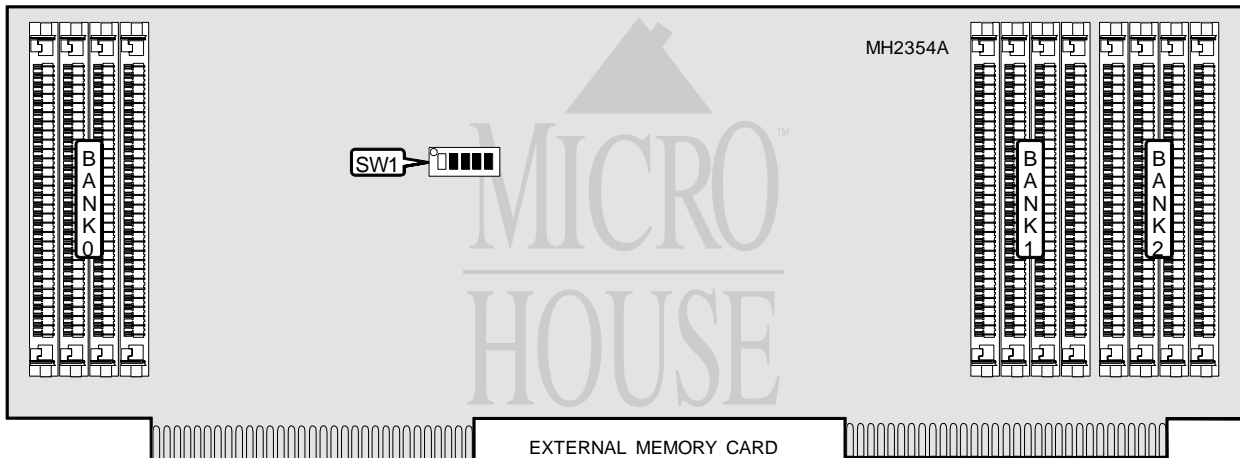

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í 384KB memory relocation enabled	SW1/5	On
384KB memory relocation disabled	SW1/5	Off

Continued on next page...

LEADING TECHNOLOGY

7000DX

... continued from previous page

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
1MB	(4) 256K x 9	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE
5MB	(4) 256K x 9	(4) 1M x 9	NONE
6MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9	NONE
9MB	(4) 1M x 9	(4) 256K x 9	(4) 1M x 9
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9

DRAM SWITCH CONFIGURATION				
Size	SW1/1	SW1/2	SW1/3	SW1/4
1MB	On	Off	On	On
2MB	Off	On	On	On
3MB	Off	Off	On	On
4MB	Off	Off	On	Off
5MB	Off	On	Off	On
6MB	Off	Off	Off	Off
8MB	Off	On	On	Off
9MB	Off	Off	Off	On
12MB	Off	Off	On	Off