


SHUTTLE COMPUTER INTERNATIONAL, INC. HOT-317 (VER. R3.0)

Processor	80386DX
Processor Speed	40MHz
Chip Set	OPTI
Max. Onboard DRAM	64MB
Cache	128KB
BIOS	AMI
Dimensions	220mm x 170mm
I/O Options	None
NPU Options	80387DX

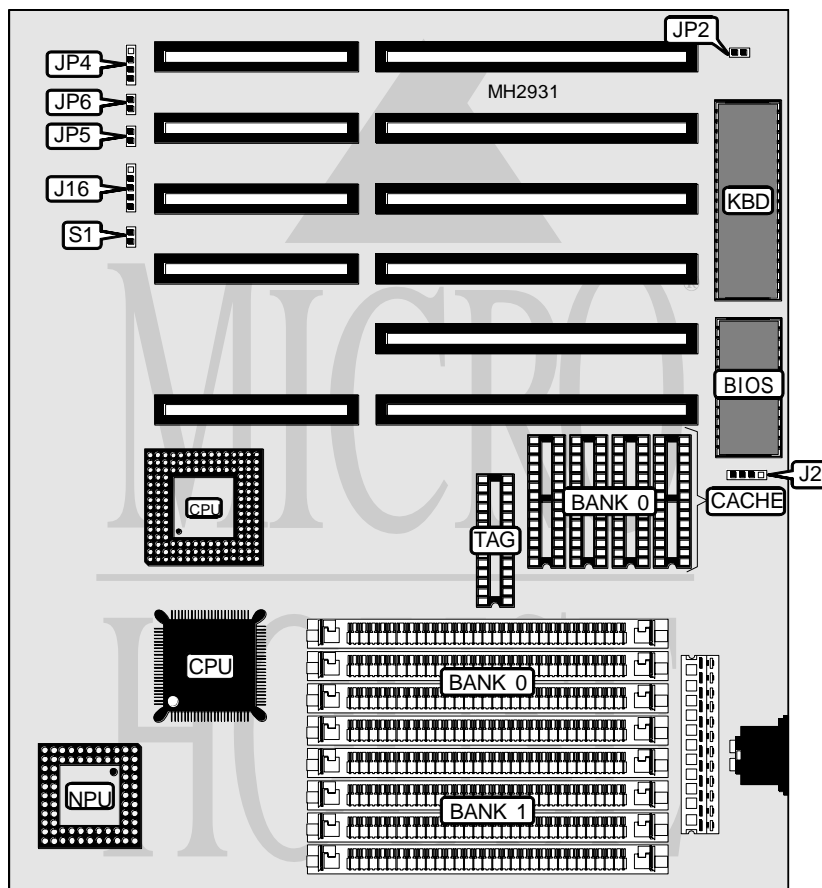

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	JP5
Power LED & keylock	J16	Turbo LED	JP6
Speaker	JP4	Reset switch	S1

Continued on next page...

SHUTTLE COMPUTER INTERNATIONAL, INC.

HOT-317 (VER. R3.0)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Battery type select internal	J2	pins 2 & 3 closed
Battery type select external	J2	Closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Turbo enabled	JP5	Open
Turbo disabled	JP5	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9
64MB	(4) 16M x 9	NONE

CACHE CONFIGURATION		
Size	Bank 0	TAG
128KB	(4) 32K x 8	(1) 32K x 8