


UNIDENTIFIED 12MHZ 286 TURBO

Processor 80286 (exact location unidentified)
Processor Speed 10/12MHz
Chip Set VLSI
Max. Onboard DRAM 4MB
Cache None
BIOS AMI/Award/Phoenix
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80287(exact location unidentified)

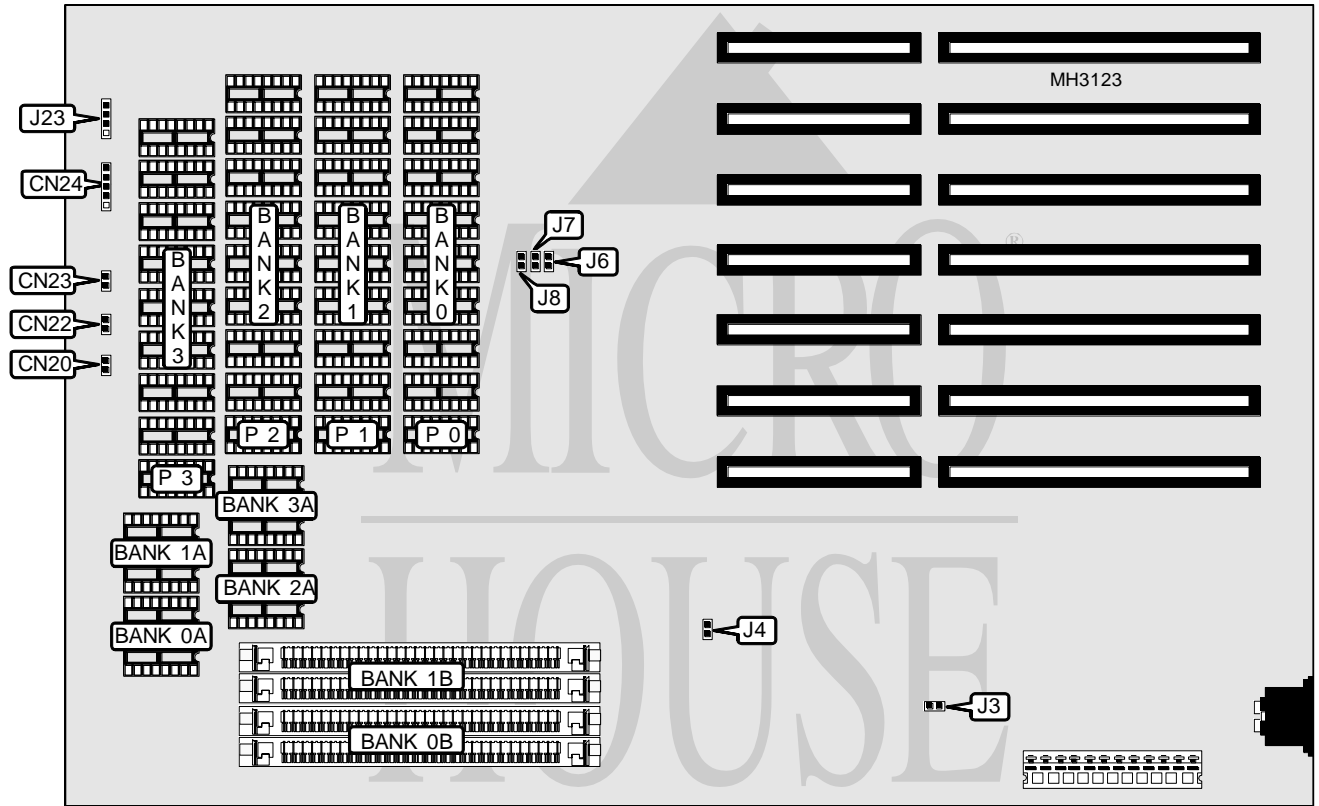

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J23	Reset switch	CN23
Turbo switch	CN20	Power LED & keylock	CN24
Turbo LED	CN22		

Continued on next page...

UNIDENTIFIED

12MHZ 286 TURBO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open
Wait state select 0 wait states	J4	Closed
Wait state select 1 wait state	J4	Open

DRAM CONFIGURATION					
Size	Bank 0	Bank 0A	Bank 0B	Bank 1	Bank 1A
512KB	(8) 41256	NONE	NONE	(8) 41256	NONE
512KB	NONE	(2) 44256	NONE	NONE	(2) 44256
640KB	(8) 41256	NONE	NONE	(8) 41256	NONE
640KB	NONE	(2) 44256	NONE	NONE	(2) 44256
1MB	(8) 41256	NONE	NONE	(8) 41256	NONE
1MB	NONE	(2) 44256	NONE	NONE	(2) 44256
2MB	(9) 411000	NONE	NONE	(9) 411000	NONE
4MB	(9) 411000	NONE	NONE	(9) 411000	NONE

DRAM CONFIGURATION (CON'T)					
Size	Bank 1B	Bank 2	Bank 2A	Bank 3	Bank 3A
512KB	NONE	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	NONE
640KB	NONE	(8) 4164	NONE	(8) 4164	NONE
640KB	NONE	NONE	(2) 4464	NONE	(2) 4464
1MB	NONE	(8) 41256	NONE	(8) 41256	NONE
1MB	NONE	NONE	(2) 44256	NONE	(2) 44256
2MB	NONE	NONE	NONE	NONE	NONE
4MB	NONE	(9) 411000	NONE	(9) 411000	NONE

Note: See table below for parity configuration.

DRAM PARITY CONFIGURATION				
Size	P 0	P 1	P 2	P 3
512KB	(1) 41256	(1) 41256	NONE	NONE
512KB	NONE	NONE	NONE	NONE
640KB	(1) 41256	(1) 41256	(1) 4164	(1) 4164
640KB	NONE	NONE	NONE	NONE
1MB	(1) 41256	(1) 41256	(1) 41256	(1) 41256
1MB	NONE	NONE	NONE	NONE
2MB	NONE	NONE	NONE	NONE
4MB	NONE	NONE	NONE	NONE

DRAM CONFIGURATION (SIMM)		
Size	Bank 0B	Bank 1B
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9

Continued on next page. . .

UNIDENTIFIED
12MHZ 286 TURBO*... continued from previous page*

DRAM JUMPER CONFIGURATION			
Size	J6	J7	J8
512KB	Closed	Closed	Closed
640KB	Closed	Closed	Open
1MB	Closed	Open	Closed
2MB	Closed	Open	Open
4MB	Open	Closed	Closed