## NCR CORPORATION MODEL 3215E


80486SX/80487SX (exact location of the 80486SX is unidentified) **Processor** 

**Processor Speed** 25MHz **Chip Set** Unidentified **Video Chip Set** Unidentified **Maximum Onboard Memory** 16MB **Maximum Video Memory** 1MB Cache None **BIOS** Unidentified **Dimensions** 391mm x 381mm

I/O Options Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports

(2), video feature connector, VGA port, riser slot

**NPU Options** None

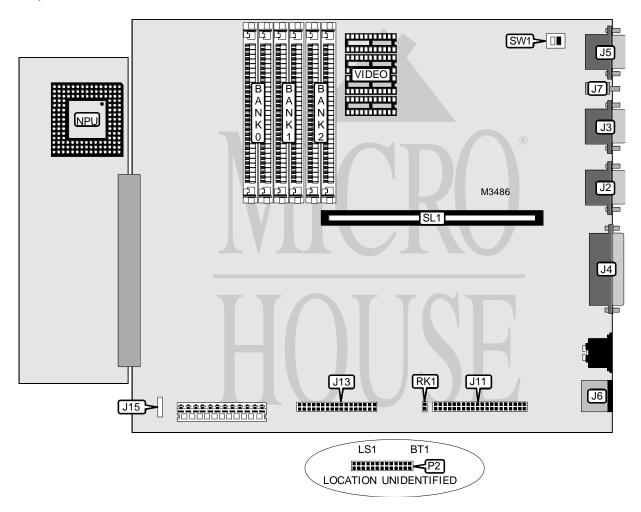

Continued on next page. . .

## NCR CORPORATION MODEL 3215E

. . . continued from previous page

CONNECTIONS					
Purpose	Location	Purpose	Location		
External battery	BT1	IDE interface	J11		
Serial port 2	J2	Floppy drive interface	J13		
Serial port 1	J3	Front panel LEDs	J15		
Parallel port	J4	Speaker	LS1		
VGA port	J5	Video feature connector	P2		
PS/2 mouse port	J6	Riser slot	SL1		
Volume control	J7				

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
Password normal operation	RK1	Open		
Password clear	RK1	Closed		
On board video enabled	SW1/1	Off		
On board video disabled	SW1/1	On		
Monitor type select color	SW1/2	On		
Monitor type select monochrome	SW1/2	Off		

DRAM CONFIGURATION					
Size	Bank 0	Bank 1	Bank 2		
2MB	(2) 1M x 9	None	None		
4MB	(2) 1M x 9	(2) 1M x 9	None		
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9		
8MB	(2) 4M x 9	None	None		
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9		
16MB	(2) 4M x 9	(2) 4M x 9	None		

## VIDEO MEMORY CONFIGURATION

Note: Board is installed with 512KB and is upgradable to 1MB. The size of the chips for 512KB/1MB video memory is unidentified. The location of the banks 0 & 1 are unidentified.