
## ELITEGROUP COMPUTER SYSTEMS, INC. AC 486 PQFP

80486SX/80487SX/80486DX/80486DX2 **Processor Processor Speed** 16/20/25/33/50(internal)/66(internal)MHz

**Chip Set Video Chip Set** None **Maximum Onboard Memory** 32MB **Maximum Video Memory** None Cache None **BIOS** AMI

**Dimensions** 254mm x 218mm

I/O Options None **NPU Options** None

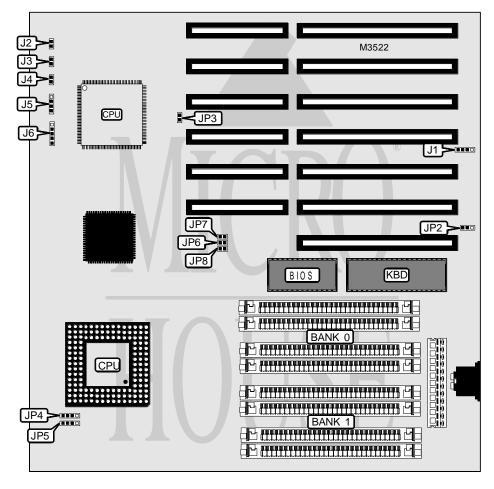

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J1	Reset switch	J4	
Turbo LED	J2	Speaker	J5	
Turbo switch	J3	Power LED & keylock	J6	

Continued on next page. . .

## ELITEGROUP COMPUTER SYSTEMS, INC. AC 486 PQFP

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
Monitor type select color	JP2	Pins 2 & 3 closed		
Monitor type select monochrome	JP2	Pins 1 & 2 closed		
PQFP CPU disabled	JP3	Closed		
PQFP CPU enabled	JP3	Open		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
1MB	(4) 256K x 9	None		
2MB	(4) 256K x 9	(4) 256K x 9		
4MB	(4) 1M x 9	None		
5MB	(4) 256K x 9	(4) 1M x 9		
8MB	(4) 1M x 9	(4) 1M x 9		
16MB	(4) 4M x 9	None		
20MB	(4) 1M x 9	(4) 4M x 9		
32MB	(4) 4M x 9	(4) 4M x 9		

CPU SPEED SELECTION				
Speed	JP6	JP7	JP8	
16MHz	Closed	Closed	Closed	
20MHz	Open	Closed	Closed	
25MHz	Closed	Open	Closed	
33MHz	Closed	Closed	Open	
50iMHz	Closed	Open	Closed	
66iMHz	Closed	Closed	Open	

CPU TYPE SELECTION			
Туре	JP4	JP5	
80486SX	Pins 2 & 3 closed	Pins 2 & 3 closed	
80487SX	Pins 1 & 2, 3 & 4 closed	Pins 1 & 2 closed	
80486DX	Pins 1 & 2, 3 & 4 closed	Pins 3 & 4 closed	
80486DX2	Pins 1 & 2, 3 & 4 closed	Pins 3 & 4 closed	