


OLIVETTI M240 (BA200, BA208)

Processor	8086
Processor Speed	10MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	640KB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Serial port, parallel port, floppy drive interface
NPU Options	8087

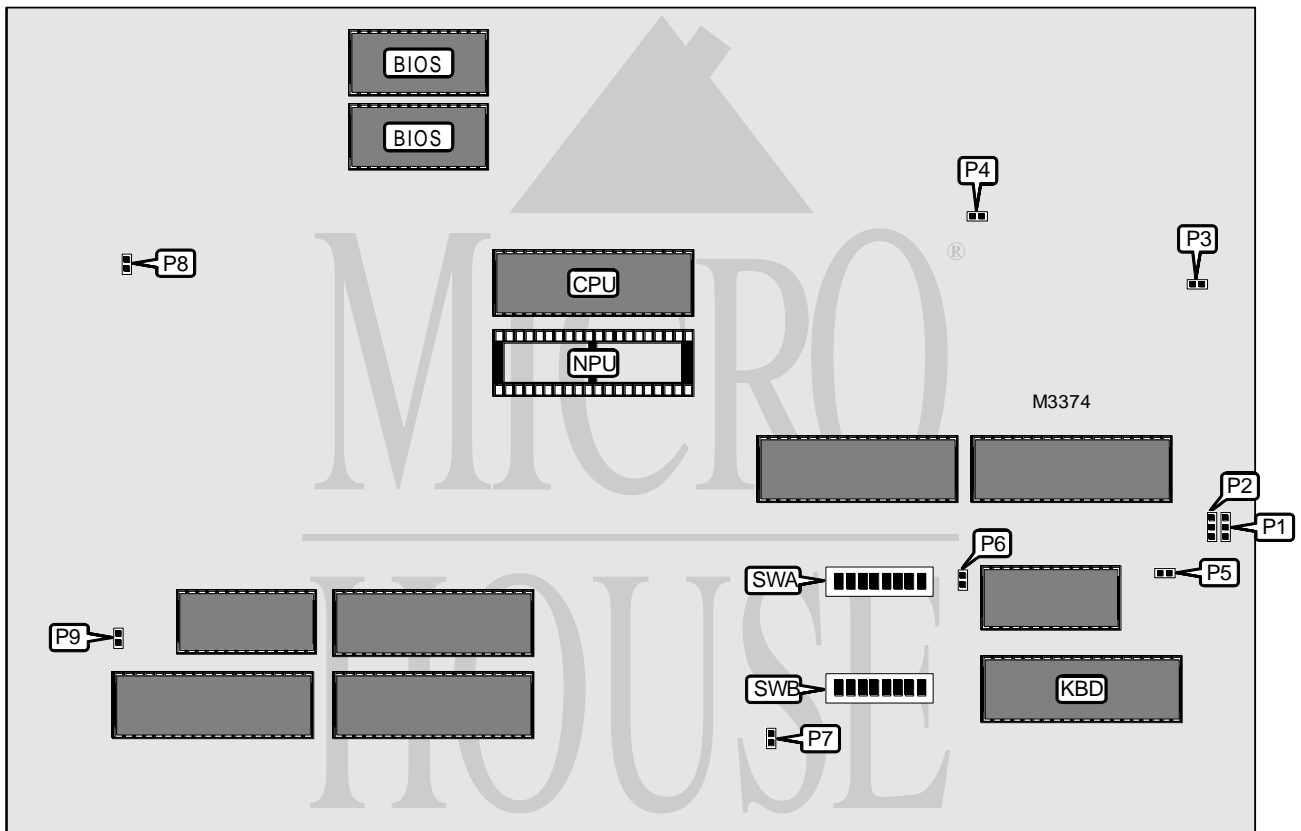

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	Unidentified	Parallel port	Unidentified
Serial port	Unidentified		

Continued on next page...

OLIVETTI

M240 (BA200, BA208)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	P3	Open
í VCO setting - do not alter	P4	Closed
í Factory configured - do not alter	P5	Open
í Factory configured - do not alter	P6	Open
í Factory configured - do not alter	P7	Closed
System BIOS enabled	P8	Open
System BIOS disabled	P8	Closed
í Factory configured - do not alter	P9	Closed
EGA board installed	SWA/3	On
EGA board not installed	SWA/3	Off
NPU disabled	SWA/8	On
NPU enabled	SWA/8	Off
Floppy drive A size select 5.25"	SWB/2	On
Floppy drive A size select 3.5"	SWB/2	Off
Floppy drive B size select 5.25"	SWB/3	On
Floppy drive B size select 3.5"	SWB/3	Off
Floppy drive interface enabled	SWB/4	On
Floppy drive interface disabled	SWB/4	Off
BIOS HD on system board	SWB/5	On
BIOS HD on controller	SWB/5	Off
Monitor controller type select OGC	SWB/6	On
Monitor controller type select all other types	SWB/6	Off
Serial port enabled	SWB/7	On
Serial port disabled	SWB/7	Off
Parallel port enabled	SWB/8	On
Parallel port disabled	SWB/8	Off

DRAM CONFIGURATION
Note: Board will accept 256KB, 512KB or 640KB. The location and chip sizes are unidentified.

DRAM SWITCH CONFIGURATION		
Size	SWA/1	SWA/2
None	On	On
256KB	On	Off
512KB	Off	On
640KB	Off	Off

FLOPPY DRIVE SELECTION		
Drives installed	SWA/4	SWA/5
1	On	On
2	Off	On
3	On	Off
4	Off	Off

Continued on next page...

OLIVETTI

M240 (BA200, BA208)

... continued from previous page

FLOPPY SIZE DRIVE SELECTION			
Type	P1	P2	SWB/1
360KB	Pins 1 & 2 closed	Pins 1 & 2 closed	On
720KB	Pins 2 & 3 closed	Pins 2 & 3 closed	On
1.2MB	Pins 2 & 3 closed	Pins 2 & 3 closed	Off
1.44MB	Pins 2 & 3 closed	Pins 2 & 3 closed	Off

MONITOR SELECTION		
Type	SWA/6	SWA/7
EGA or not installed	On	On
40 x 25 color	Off	On
80 x 25 color	On	Off
80 x 25 monochrome	Off	Off

MISCELLANEOUS TECHNICAL NOTE
The location of pin 1 on the jumpers and switches are unidentified.