


IBM CORPORATION

PC 330 P-60, PC 350 P-60

Processor	Pentium
Processor Speed	60/90MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	128MB
Maximum Video Memory	Unidentified
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot
NPU Options	None

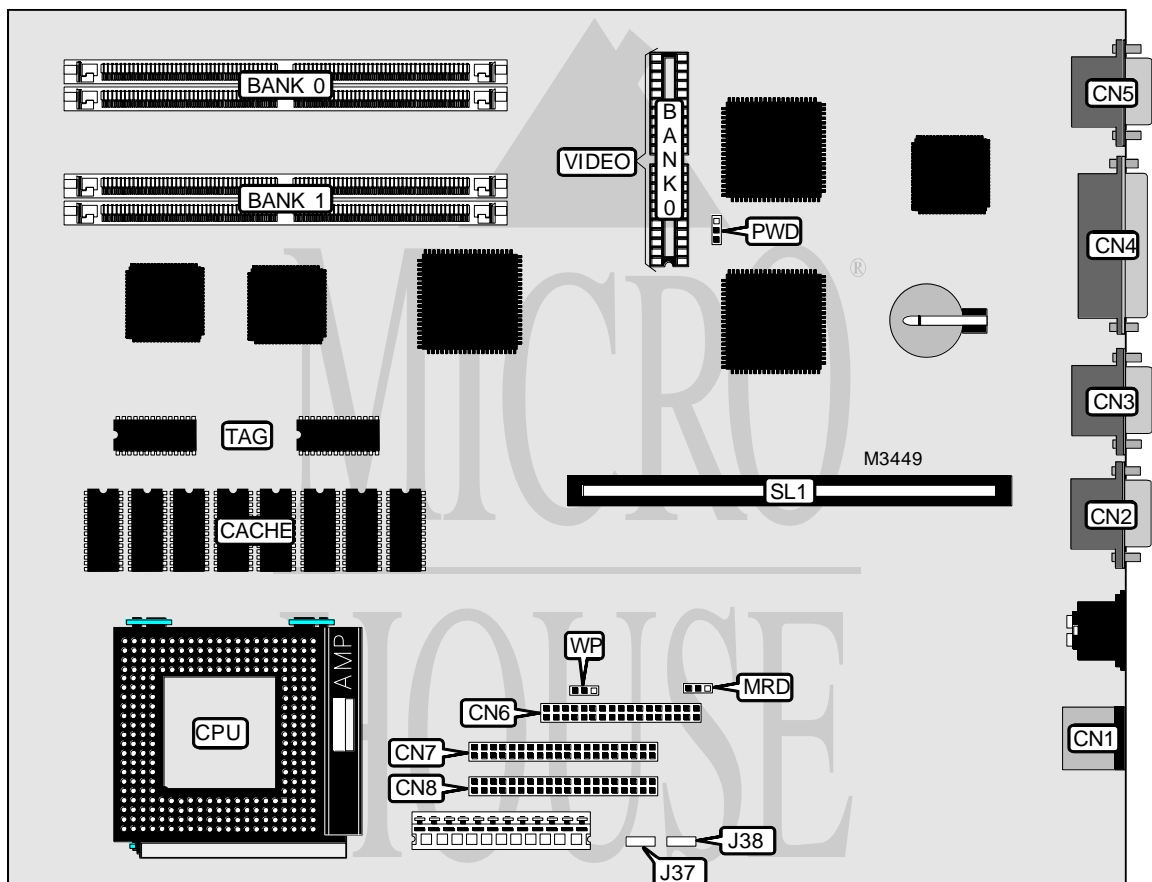

Continued on next page. . .

IBM CORPORATION

PC 330 P-60, PC 350 P-60

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	IDE interface	CN7
Serial port	CN2	IDE interface	CN8
Serial port	CN3	On/off switch connector	J37
Parallel port	CN4	On/off switch power supply connector	J38
VGA port	CN5	Riser slot	SL1
Floppy drive interface	CN6		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Modem answers on ring	MRD	Pins 2 & 3 closed
Modem does not answer on ring	MRD	Pins 1 & 2 closed
Password normal operation	PWD	Pins 1 & 2 closed
Password clear	PWD	Pins 2 & 3 closed
í Floppy drive write protect disabled	WP	Pins 1 & 2 closed
Floppy drive write protect enabled	WP	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Continued on next page. . .

IBM CORPORATION

P C 330 P-60, P C 350 P-60

... continued from previous page

CACHE CONFIGURATION

Note: 256KB cache is factory installed and is not configurable.

VIDEO MEMORY CONFIGURATION

Size	Bank 0
1MB	(2) 256K x 16
Note: The maximum memory size is unidentified. This configuration is for an upgrade.	