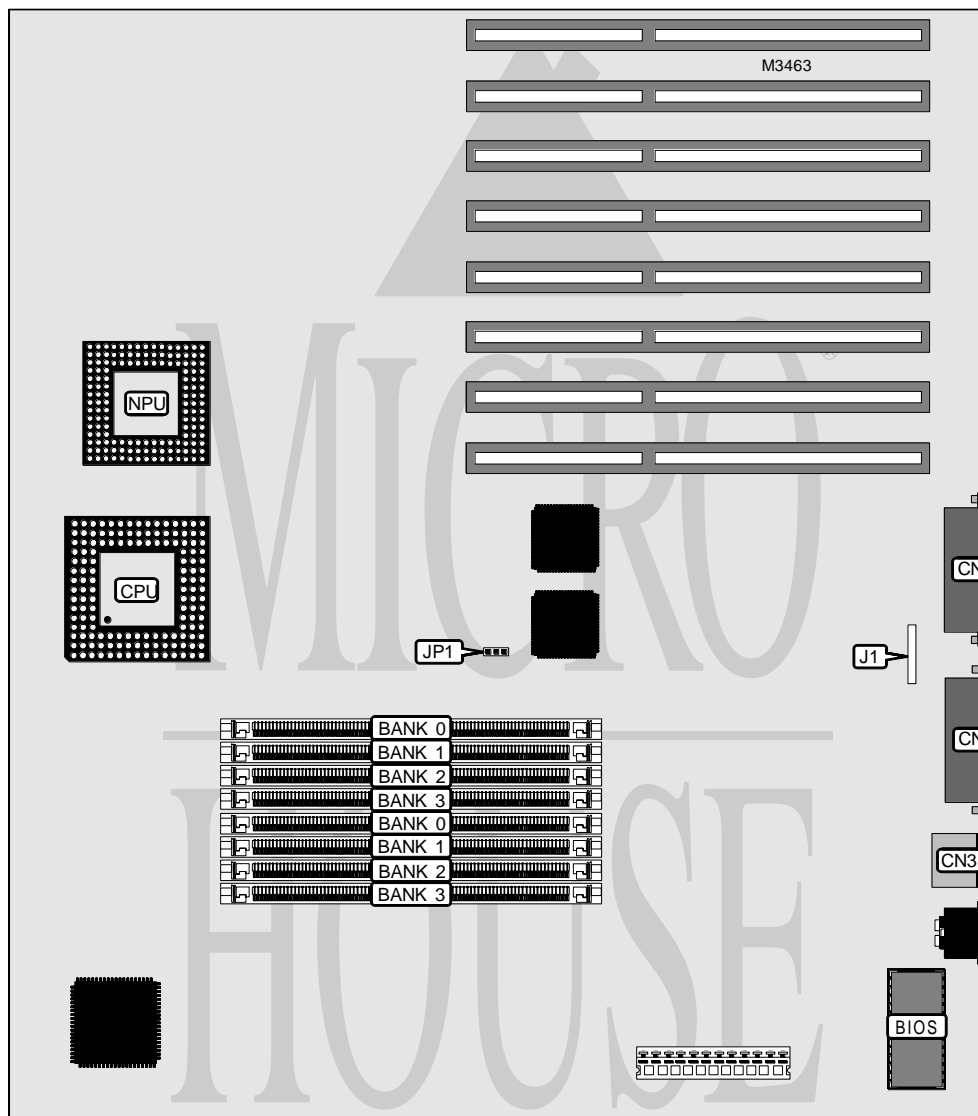


OLIVETTI

LSX5010 (BA867, BA886, BA894)

LSX 5020 (BA887, BA892)

Processor	80486SX
Processor Speed	25MHz (LSX5010) 33MHz (LSX5020)
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	64MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	355mm x 304mm
I/O Options	Parallel port, PS/2 mouse port, serial port, console connector
NPU Options	4167

*Continued on next page. . .*

OLIVETTI

LSX5010 (BA867, BA886, BA894)

LSX 5020 (BA887, BA892)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	CN1	PS/2 mouse port	CN3
Parallel port	CN2	Console connector	J1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password normal operation	JP1	Pins 1 & 2 closed
Password clear	JP1	Pins 2 & 3 closed
Note: If JP1 has pins 2 & 3 closed for normal operation, move jumper to pins 1 & 2 to clear password.		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(2) 256K x 36	(2) 256K x 36	None	None
6MB	(2) 512K x 36	(2) 256K x 36	None	None
8MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36	None	None
8MB	(2) 1M x 36	None	None	None
10MB	(2) 1M x 36	(2) 256K x 36	None	None
10MB	(2) 512K x 36	(2) 512K x 36	(2) 256K x 36	None
12MB	(2) 1M x 36	(2) 512K x 36	None	None
14MB	(2) 1M x 36	(2) 512K x 36	(2) 256K x 36	None
16MB	(2) 1M x 36	(2) 1M x 36	None	None
16MB	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
16MB	(2) 2M x 36	None	None	None
18MB	(2) 2M x 36	(2) 256K x 36	None	None
18MB	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36	None
20MB	(2) 2M x 36	(2) 512K x 36	None	None
20MB	(2) 2M x 36	(2) 256K x 36	(2) 256K x 36	None
22MB	(2) 2M x 36	(2) 256K x 36	(2) 256K x 36	None
24MB	(2) 2M x 36	(2) 1M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	None
26MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36
28MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 512K x 36
30MB	(2) 2M x 36	(2) 1M x 36	(2) 512K x 36	(2) 256K x 36
32MB	(2) 4M x 36	None	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None	None
34MB	(2) 2M x 36	(2) 2M x 36	(2) 256K x 36	None
34MB	(2) 4M x 36	(2) 256K x 36	None	None
36MB	(2) 4M x 36	(2) 512K x 36	None	None
38MB	(2) 4M x 36	(2) 512K x 36	(2) 256K x 36	None
40MB	(2) 4M x 36	(2) 512K x 36	(2) 256K x 36	(2) 256K x 36

Continued on next page...

OLIVETTI**LSX5010 (BA867, BA886, BA894)****LSX 5020 (BA887, BA892)***... continued from previous page*

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
42MB	(2) 4M x 36	(2) 512K x 36	(2) 512K x 36	(2) 256K x 36
44MB	(2) 4M x 36	(2) 512K x 36	(2) 512K x 36	(2) 512K x 36
48MB	(2) 4M x 36	(2) 2M x 36	None	None
50MB	(2) 4M x 36	(2) 2M x 36	(2) 512K x 36	None
52MB	(2) 4M x 36	(2) 2M x 36	(2) 512K x 36	(2) 512K x 36
56MB	(2) 4M x 36	(2) 1M x 36	None	None
64MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None	None
Note: Minimum memory on the LSX 5020 is 8MB. The 4M x 36 may not operate on all boards.				