


# IBM CORPORATION PC 365 (TYPE 6589)

<b>Processor</b>	Pentium
<b>Processor Speed</b>	180/200MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	512MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), riser slot, VRM connector
<b>NPU Options</b>	None

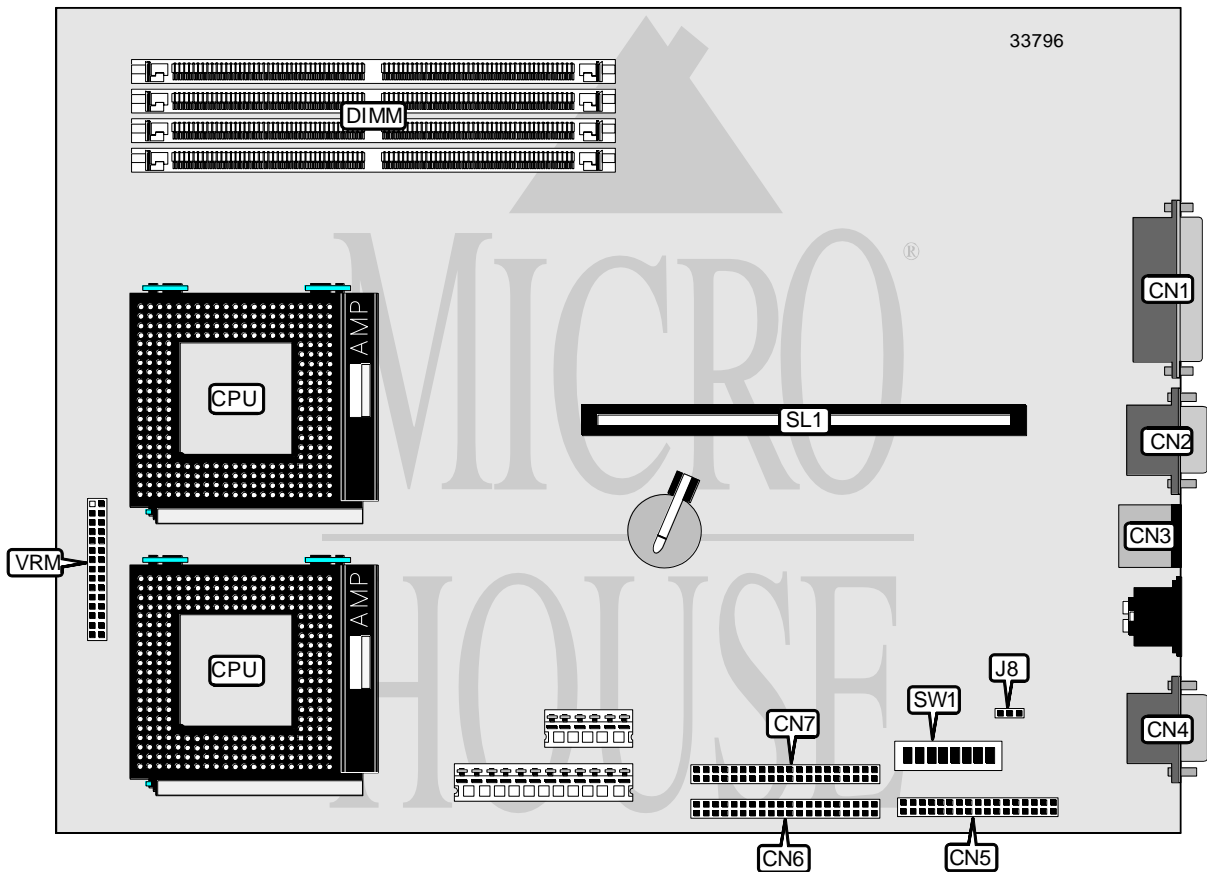

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	IDE interface 2	CN6
Serial port	CN2	IDE interface 1	CN7
PS/2 mouse port	CN3	Riser slot	SL1
Serial port	CN4	VRM connector	VRM
Floppy drive interface	CN5		

Continued on next page. . .

# IBM CORPORATION

## PC 365 (TYPE 6589)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	J8	Pins 1 & 2 closed
CMOS memory clear	J8	Pins 2 & 3 closed
í Floppy drive write protect disabled	SW1/8	On
Floppy drive write protect enabled	SW1/8	Off

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
16MB	(1) 2M x 64	None	None	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 16M x 64	None	None	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: Board accepts EDO memory. The location of banks 0, 1, 2, & 3 are unidentified.

CPU SPEED SELECTION							
Speed	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
180MHz	On	Off	On	On	On	Off	Off
200MHz	On	Off	On	On	Off	On	Off