
## UNIDENTIFIED 286-SYSTEM BOARD

Processor
Processor Speed
Chip Set
Video Chip Set
Maximum Onboard Memory
Maximum Video Memory
Cache
BIOS
Dimensions
I/O Options
NPU Options

AM286/80286 6/8/10/12/16MHz VLSI None 4MB None None AMI/Award/Phoenix 330mm x 218mm None 80287

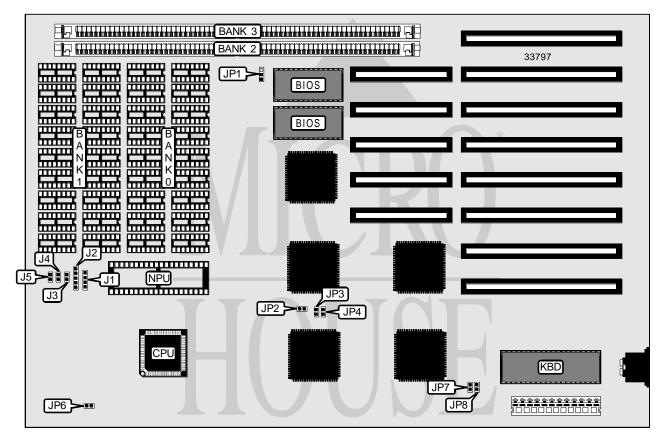

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Turbo LED	J4
Power LED & keylock	J2	Turbo switch	J5
Reset switch	J3		

Continued on next page. . .

## UNIDENTIFIED 286-SYSTEM BOARD

## ... continued from previous page

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
BIOS type select 27128	JP1	Pins 2 & 3 closed	
BIOS type select 27256	JP1	Pins 1 & 2 closed	
Monitor type select color	JP7	Closed	
Monitor type select monochrome	JP7	Open	
Wait state select 0 wait states	JP8	Closed	
Wait state select 1 wait state	JP8	Open	

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(18) 41256	None	None	None
512KB	None	None	(2) 256K x 9	None
640KB	(18) 41256	(18) 4164	None	None
1MB	(18) 41256	(18) 41256	None	None
1MB	None	None	(2) 256K x 9	(2) 256K x 9
2MB	(18) 411000	None	None	None
2MB	None	None	(2) 1M x 9	None
4MB	(18) 411000	(18) 411000	None	None
4MB	None	None	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION				
Size	JP2	JP3	JP4	
512KB	Open	Closed	Closed	
640KB	Closed	Open	Open	
1MB	Closed	Open	Closed	
2MB	Closed	Closed	Open	
4MB	Closed	Closed	Closed	

CPU SPEED SELECTION		
Speed	JP6	
6/12MHz	Open	
8/12MHz	Closed	