


UNIVERSAL SCIENTIFIC INDUSTRIES CO., LTD.

PRO-273

Processor	Pentium II
Processor Speed	Unidentified
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	384MB (EDO supported)
Maximum Video Memory	None
Cache	256/512KB (located on Pentium II CPU)
BIOS	Award
Dimensions	305mm x 244mm
I/O Options	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial port, IR connector, USB connectors (2), ATX power connector
NPU Options	None

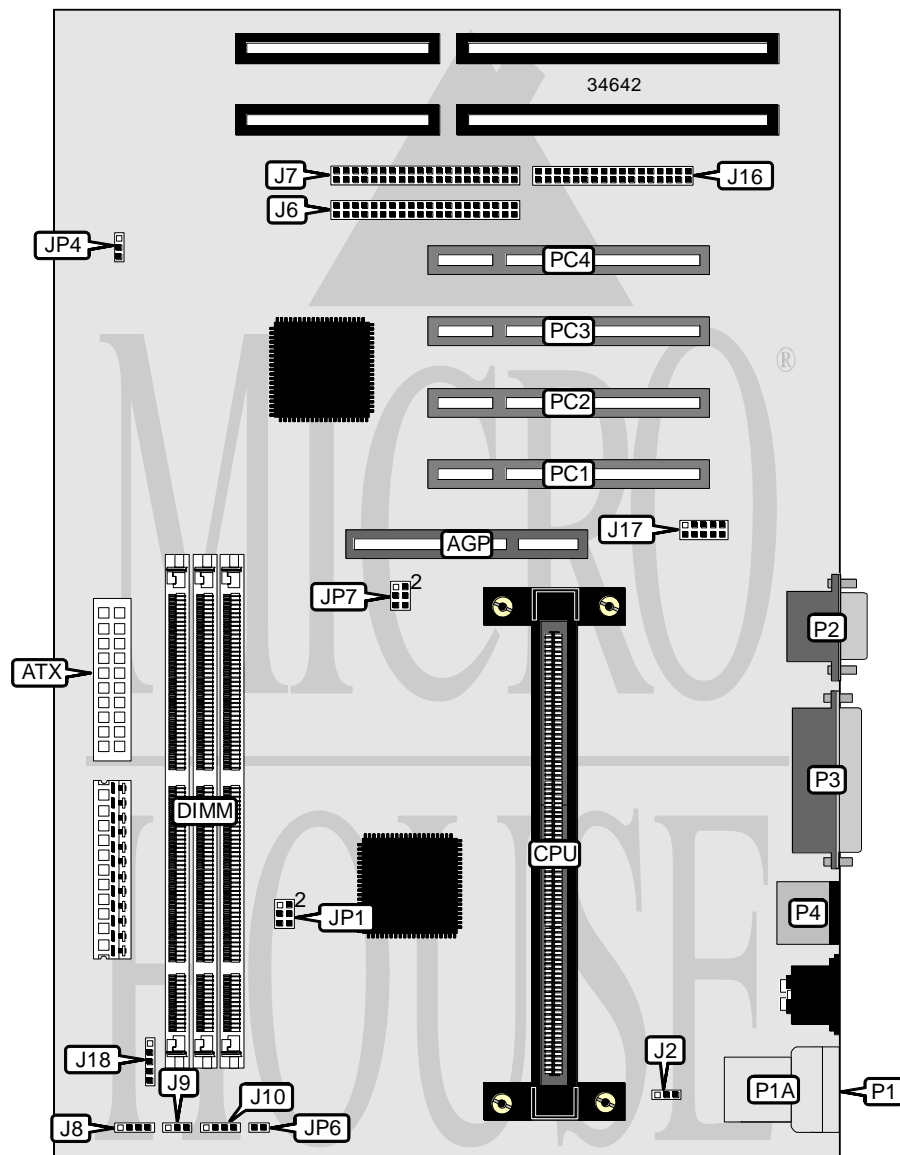

Continued on next page. . .

UNIVERSAL SCIENTIFIC INDUSTRIES CO., LTD.

PRO - 273

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	IR connector	J17
ATX power connector	ATX	Power LED & keylock	J18
CPU fan power	J2	Reset switch	JP6
IDE interface 1	J6	USB connector	P1
IDE interface 2	J7	USB connector	P1A
IDE interface LED	J8	Serial port 1	P2
Power LED	J9	Parallel port	P3
Speaker	J10	PS/2 mouse port	P4
Floppy drive interface	J16	32-bit PCI slots	PC1 – PC4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
CMOS memory normal operation	JP4	Pins 1 & 2 closed
CMOS memory clear	JP4	Pins 2 & 3 closed

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None
256MB	(2) 32M x 36	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

Continued on next page. . .

UNIVERSAL SCIENTIFIC INDUSTRIES CO., LTD.
P R O - 2 7 3

... continued from previous page

CPU MULTIPLIER SELECTION	
Multiplier	JP1
2.5x	Pins 1 & 2, 3 & 4 closed
3x	Pins 1 & 2, 5 & 6 closed
3.5x	Pins 1 & 2 closed
4x	Pins 3 & 4, 5 & 6 closed

CPU CLOCK SPEEDSPEED SELECTION	
CPU speed	JP7
66MHz	Open
68.5MHz	Pins 5 & 6 closed
75MHz	Pins 3 & 4 closed
83MHz	Pins 1 & 2, 5 & 6 closed