


## TANDY/RADIO SHACK 3000HD (DISCRETE VERSION)

Processor	80286
Processor Speed	8MHz
Chip Set	C & T
Video Chip Set	None
Maximum Onboard Memory	640KB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	462mm x 458mm
I/O Options	None
NPU Options	80287

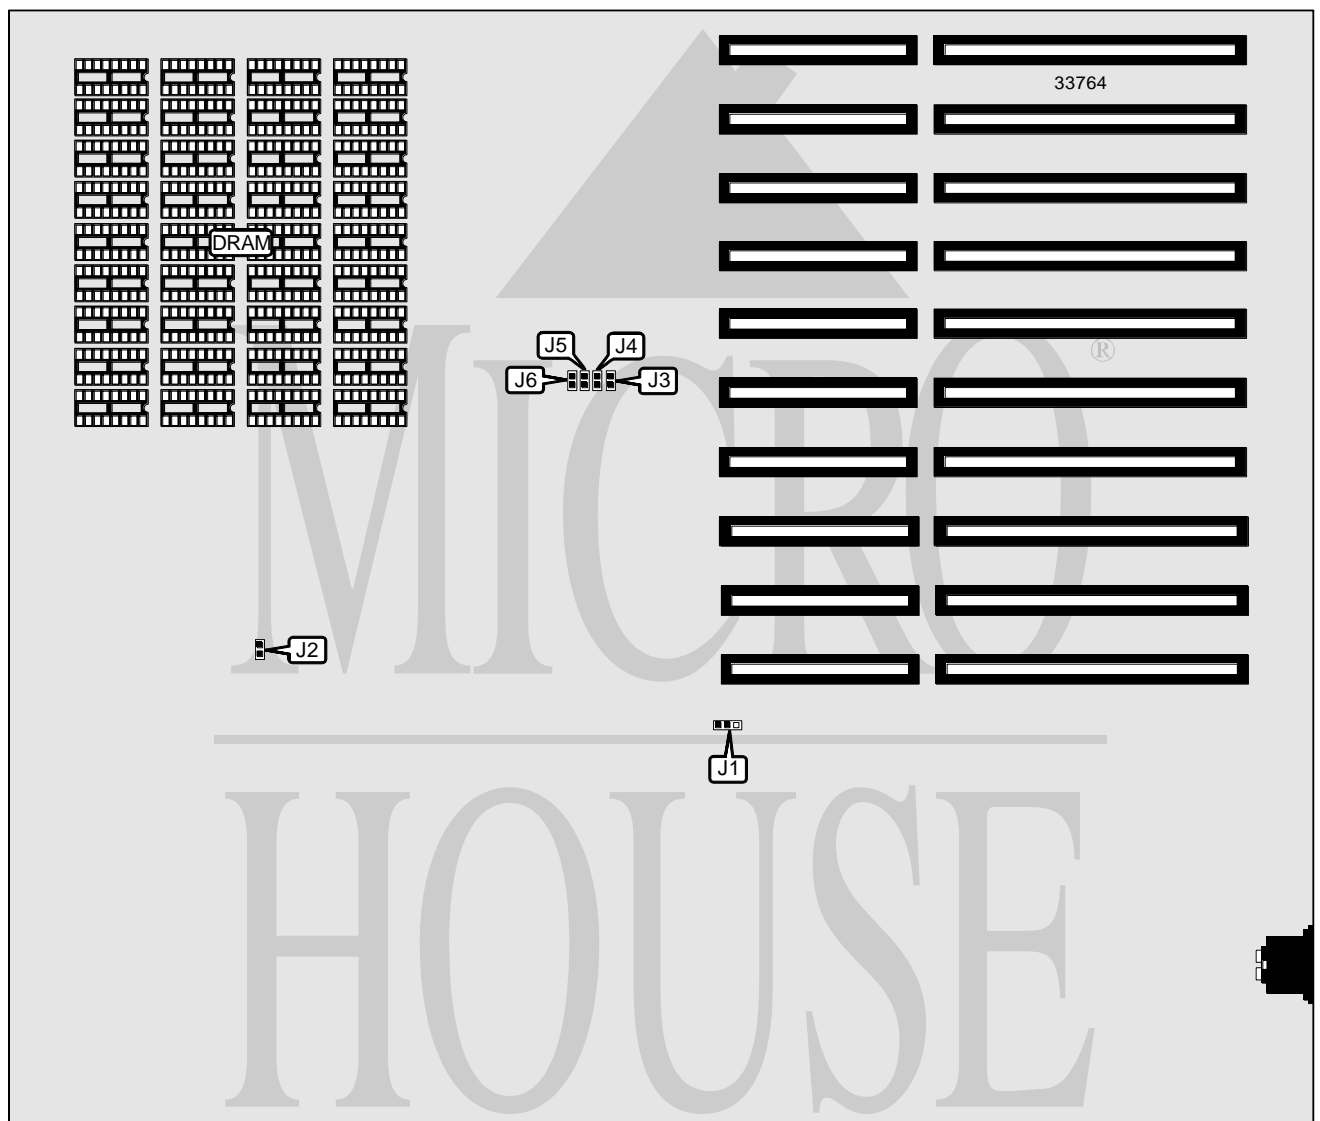

*Continued on next page...*

## TANDY/RADIO SHACK 3000 (DISCRETE VERSION)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select monochrome	J1	Pins 1 & 2 closed
Monitor type select color	J1	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	None
640KB	(18) 41256	(18) 4164
Note: The location of banks 0 & 1 are unidentified.		

DRAM JUMPER CONFIGURATION	
Size	J2
512KB	Open
640KB	Closed

BIOS SELECTION				
Type	J3	J4	J5	J6
27128	Closed	Closed	Open	Open
27256 (not used)	Open	Open	Closed	Closed