


WYSE TECHNOLOGY, INC.
 WYSEPC 286 (2100 SERIES)

Processor	80286
Processor Speed	8MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	None
NPU Options	80287

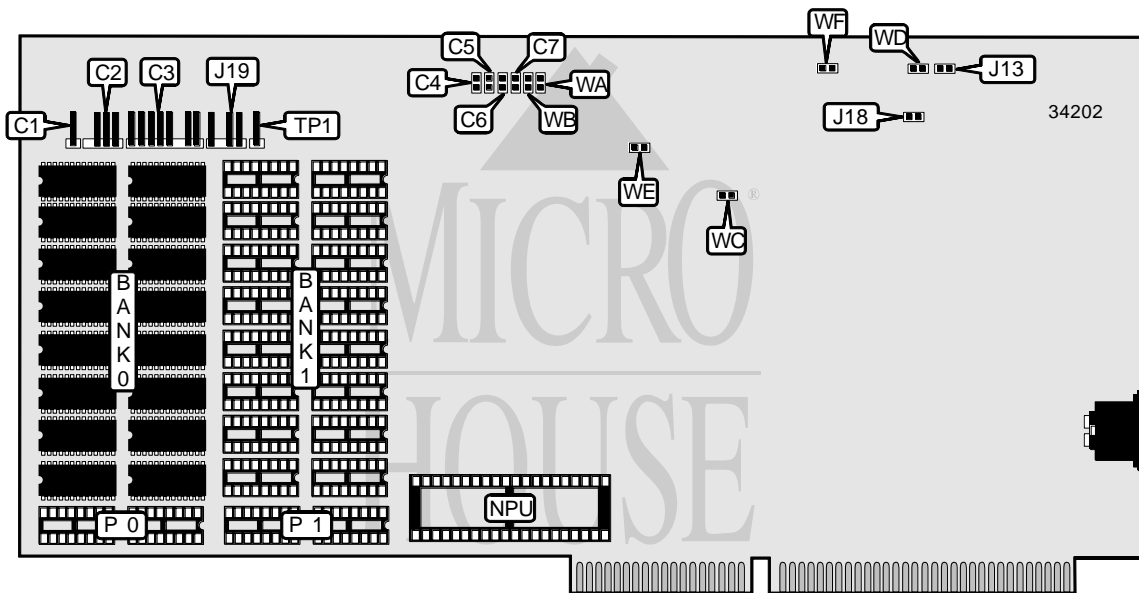

CONNECTIONS			
Purpose	Location	Purpose	Location
Power good connector	C1	External battery	J19
Speaker	C2	Reset switch	TP1

Continued on next page. . .

WYSE TECHNOLOGY, INC.
 WYSEPC 286 (2100 SERIES)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	C3	Unidentified
í Factory configured - do not alter	C4	Unidentified
í Factory configured - do not alter	C5	Unidentified
í Factory configured - do not alter	C6	Unidentified
í Factory configured - do not alter	C7	Unidentified
í Factory configured - do not alter	J13	Unidentified
í Factory configured - do not alter	J18	Unidentified
Monitor type select color	WD	Closed
Monitor type select monochrome	WD	Open

DRAM CONFIGURATION				
Size	Bank 0	P 0	Bank 1	P 1
512KB	(8) 41256	(1) 41256	None	None
1MB	(8) 41256	(1) 41256	(8) 41256	(1) 41256

DRAM JUMPER CONFIGURATION			
Onboard memory	Expansion board starting address	WA	WB
512KB	512KB/1MB	Closed	Closed
1MB	512KB	Closed	Closed
1MB	1MB	Open	Closed
1MB	1.375MB	Open	Open
1MB	1.5MB	Closed	Open

NPU SPEED SELECTION			
Speed	WC	WE	WF
6MHz	Closed	Open	Closed
10MHz	Open	Closed	Open