


DELL COMPUTER CORPORATION POWEREDGE XL 5133-4

Processor	Pentium
Processor Speed	133MHz
Chip Set	Intel
Video Chip Set	Cirrus Logic
Maximum Onboard Memory	768MB (EDO supported)
Maximum Video Memory	1MB
Cache	512/1024/2048/4096KB
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	External memory cards (2), 32-bit PCI slots (5), floppy drive interface, IDE interface, Ultra Wide SCSI interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port
NPU Options	None

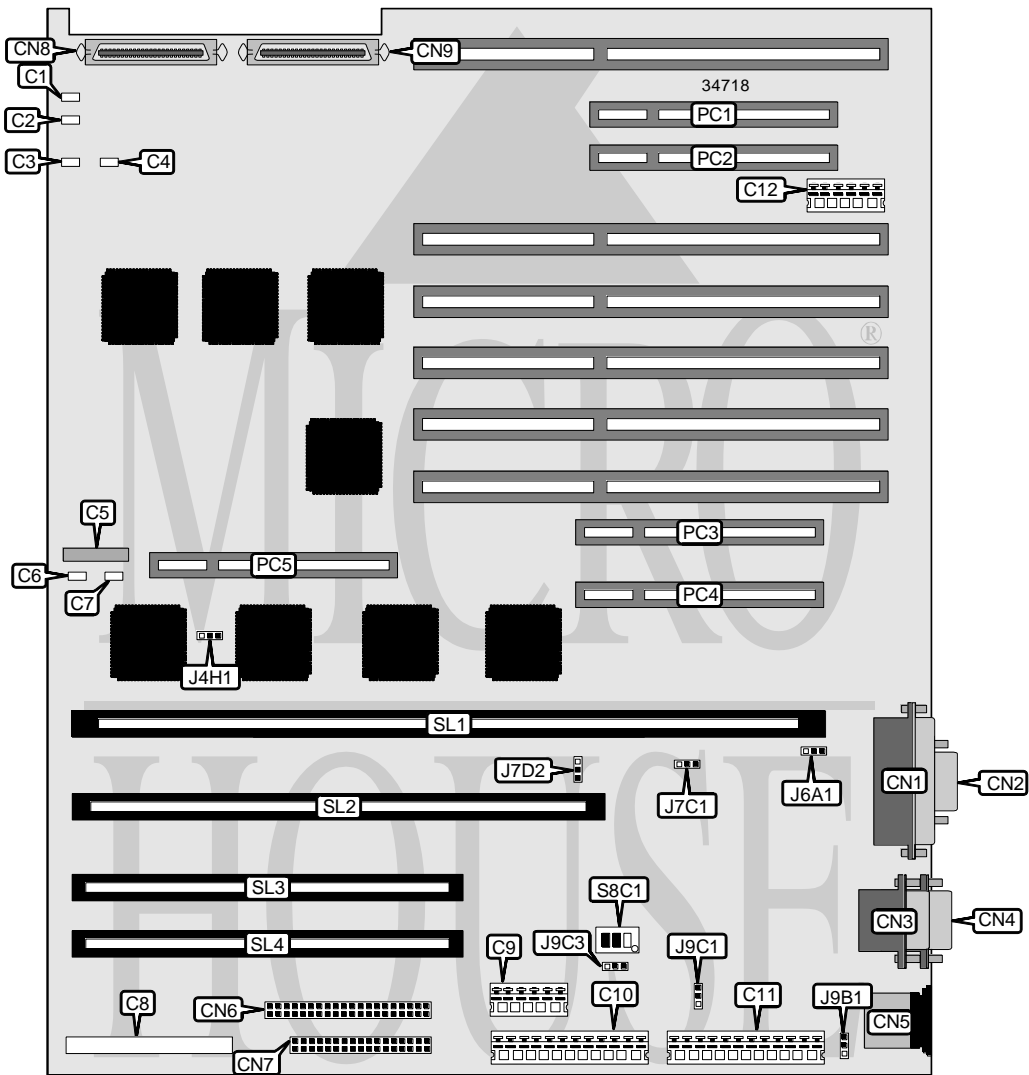

Continued on next page . . .

DELL COMPUTER CORPORATION
POWEREDGE XL 5133-4

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
I2C connector	C1	VGA port	CN2
I2C connector	C2	Serial port 1	CN3
Chassis fan power	C3	Serial port 2	CN4
IDE interface LED 2	C4	PS/2 mouse port	CN5
SMM connector	C5	IDE interface	CN6
Chassis fan power	C6	Floppy drive interface	CN7
IDE interface LED 1	C7	Ultra Wide SCSI interface	CN8
Front panel connector	C8	Ultra Wide SCSI interface	CN9
3.3v auxiliary power	C9	32-bit PCI slots	PC1 – PC5
Power connector	C10	CPU slot 2	SL1
Power connector	C11	CPU slot 1	SL2
3.3v auxiliary power	C12	Memory slot	SL3
Parallel port	CN1	Memory slot	SL4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CPU slot 2 to TDV module enabled	J4H1	Pins 1 & 2 closed
CPU slot 2 to TDV module disabled	J4H1	Pins 2 & 3 closed
í Video sleep address select 03C3H	J6A1	Pins 2 & 3 closed
Video sleep address select 46E8H	J6A1	Pins 1 & 2 closed
í BIOS write protect disabled	J7C1	Pins 1 & 2 closed
BIOS write protect enabled	J7C1	Pins 2 & 3 closed
í BIOS normal operation	J7D2	Pins 1 & 2 closed
BIOS recovery mode	J7D2	Pins 2 & 3 closed
RTC power control disabled	J9C3	Pins 1 & 2 closed
RTC power control enabled	J9C3	Pins 2 & 3 closed
í CMOS memory normal operation	S8C1/1	Off
CMOS memory clear	S8C1/1	On
í Password enabled	S8C1/2	Off
Password disabled	S8C1/2	On
í Flash write enabled	S8C1/3	On
Flash write disabled	S8C1/3	Off

Continued on next page. . .

DELL COMPUTER CORPORATION
POWEREDGE XL 5133-4

... continued from previous page

SIMM CONFIGURATION 1			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None
256MB	(2) 32M x 36	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory. To install the maximum memory, fully populate configuration 1 & configuration 2.

SIMM CONFIGURATION 2			
Size	Bank 3	Bank 4	Bank 5
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None
256MB	(2) 32M x 36	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory. Memory is located on external memory cards.

CACHE CONFIGURATION
Note: The location of the cache is unidentified.

Continued on next page. . .

DELL COMPUTER CORPORATION
POWEREDGE XL 5133-4

... continued from previous page

VIDEO MEMORY CONFIGURATION

Note: 1MB video memory is factory installed and is not configurable. The location is unidentified.

FLOPPY DRIVE SELECTION

Setting	J9B1	J9C1
2.88MB floppy disabled	Pins 1 & 2 closed	Pins 1 & 2 closed
Automatic size detection enabled	Pins 2 & 3 closed	Pins 2 & 3 closed