


IBM CORPORATION INTELLISTATION (TYPE 6888)

Processor	Pentium II
Processor Speed	233/266MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
Maximum Video Memory	1MB
Cache	256/512KB (located on Pentium II CPU)
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Ethernet 10BaseT connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port, riser slot, IR connector, USB connectors (2), line out, line in, CD-ROM audio in, wavetable connector, telajack connector, wake on LAN connector, wake on modem connector
NPU Options	None

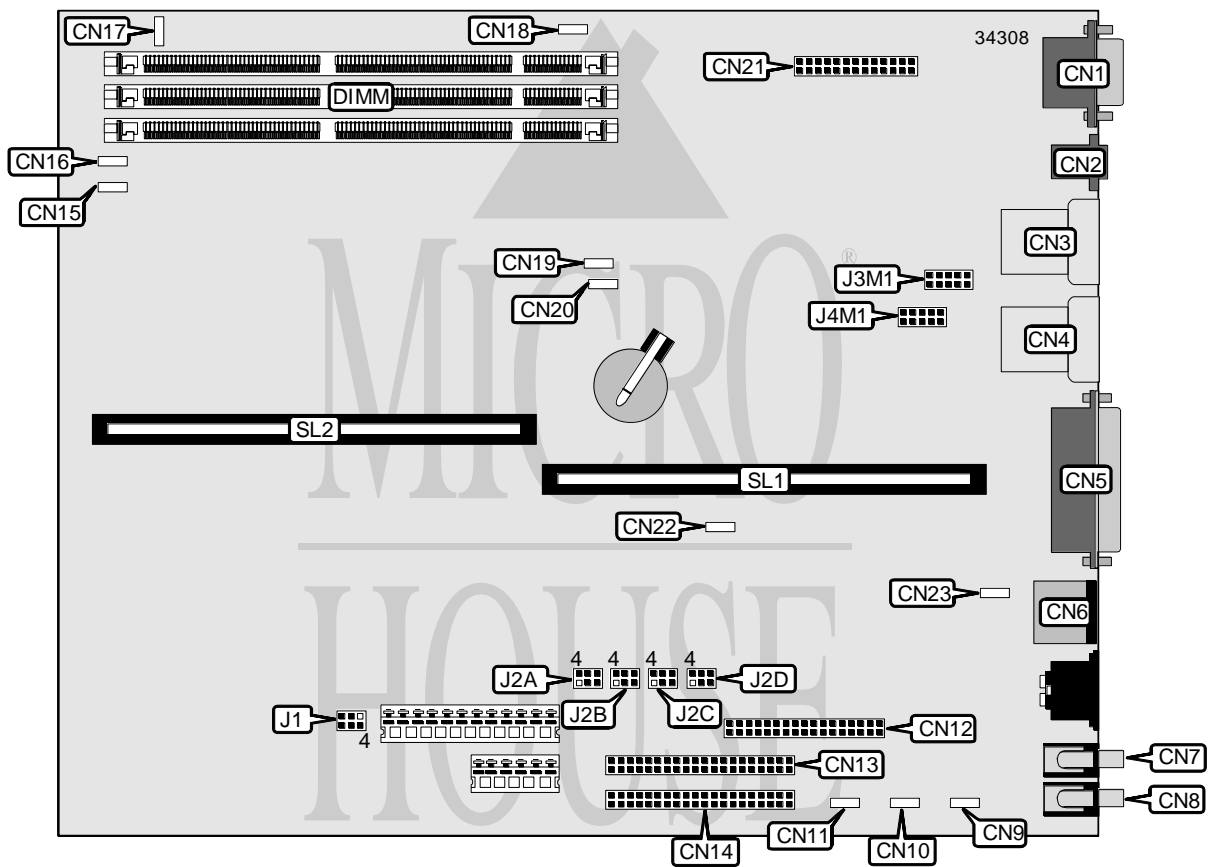

Continued on next page . . .

IBM CORPORATION
INTELLISTATION (TYPE 6888)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Soft off power supply	CN15
Ethernet 10BaseT connector	CN2	Power LED/ IDE interface LED	CN16
USB connector 2	CN3	Chassis fan power	CN17
USB connector 1	CN4	SCSI interface LED	CN18
Parallel port	CN5	Wake on LAN connector	CN19
PS/2 mouse port	CN6	Wake on modem connector	CN20
Line in	CN7	VGA feature connector	CN21
Line out	CN8	Chassis security connector	CN22
Telajack connector	CN9	+5v auxiliary connector	CN23
CD-ROM audio in	CN10	IR connector	J3M1
Wavetable connector	CN11	Serial port 2	J4M1
Floppy drive interface	CN12	Riser slot	SL1
IDE interface 1	CN13	CPU Slot 1	SL2
IDE interface 2	CN14		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Flash BIOS normal operation	J1	Pins 5 & 6 closed
Flash BIOS recovery mode	J1	Pins 4 & 5 closed
Floppy drive write protect disabled	J2A	Pins 5 & 6 closed
Floppy drive write protect enabled	J2A	Pins 4 & 5 closed
í CMOS memory normal operation	J2C	Pins 5 & 6 closed
CMOS memory clear	J2C	Pins 4 & 5 closed
í Factory configured - do not alter	J2C	Pins 2 & 3 closed
Password normal operation	J2D	Pins 2 & 3 closed
Password clear	J2D	Pins 1 & 2 closed
Setup enabled	J2D	Pins 5 & 6 closed
Setup disabled	J2D	Pins 4 & 5 closed

DRAM CONFIGURATION
Note: The maximum memory and configuration is unidentified.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

VIDEO MEMORY CONFIGURATION
Note: The size and location of video memory is unidentified.

CPU SPEED SELECTION		
Speed	J2A	J2B
233MHz	Pins 2 & 3 closed	Pins 2 & 3, 5 & 6 closed
266MHz	Pins 1 & 2 closed	Pins 1 & 2, 4 & 5 closed