


# HEWLETT-PACKARD COMPANY

## HP VECTRA XA 6/XXX

<b>Device Type</b>	Mainboard
<b>Processor</b>	Pentium Pro
<b>Processor Speed</b>	150/166/180/200/233/266MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	192MB (EDO supported)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB (located on Pentium Pro CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2)
<b>NPU Options</b>	None

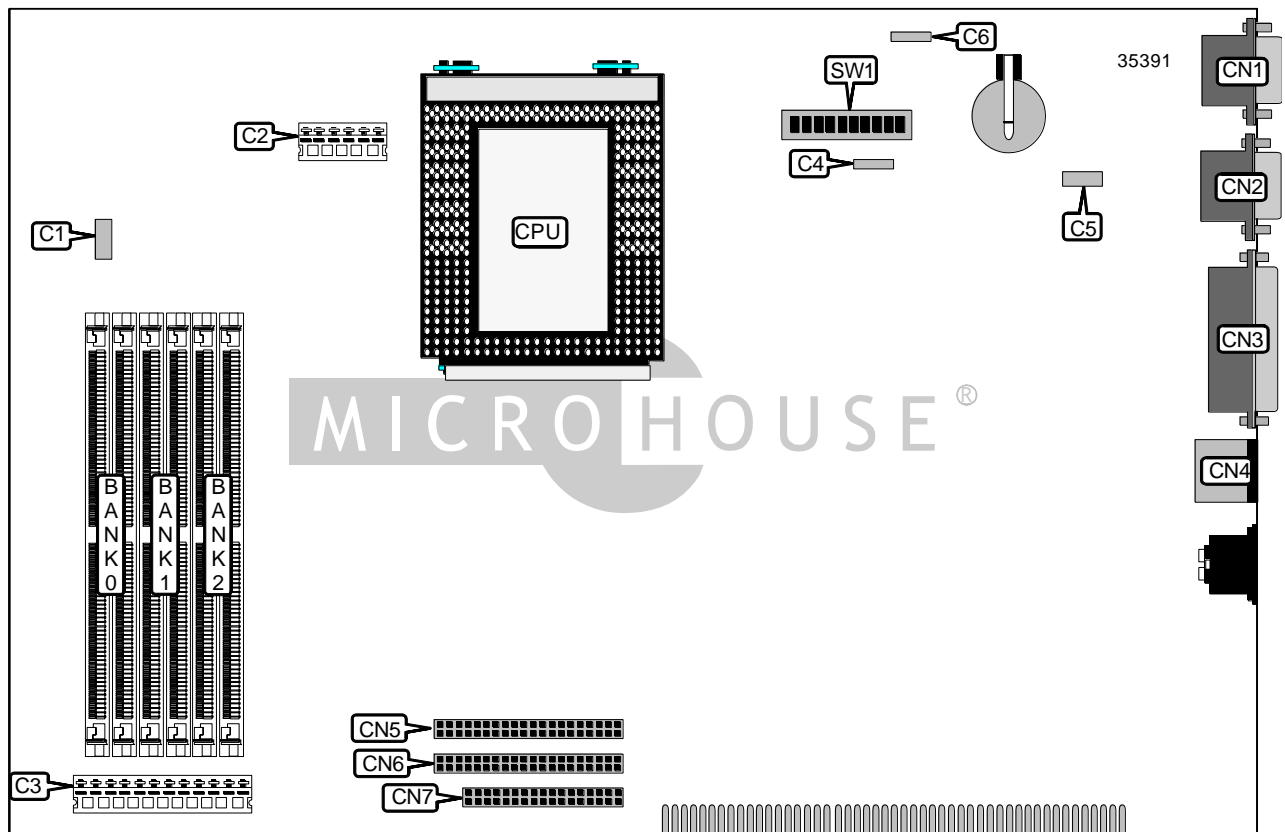

*Continued on next page. . .*

# HEWLETT-PACKARD COMPANY

## HP VECTRA XA 6/XXX

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Control panel connector	C1	Serial port 1	CN2
3.3v power	C2	Parallel port	CN3
5v power	C3	PS/2 mouse port	CN4
Speaker	C4	IDE interface 1	CN5
External start connector	C5	IDE interface 2	CN6
External battery	C6	Floppy drive interface	CN7
Serial port 2	CN1		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	SW1/6	Off
CMOS memory clear	SW1/6	On
í Password normal operation	SW1/7	Off
Password clear	SW1/7	On
í Keyboard power down disabled	SW1/8	Off
Keyboard power down enabled	SW1/8	On
í Normal operation	SW1/9	Off
Clear product ID	SW1/9	On
í Factory configured - do not alter	SW1/10	Off

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None
32MB	(2) 4M x 36	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None
64MB	(2) 8M x 36	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
128MB	(2) 16M x 36	None	None
136MB	(2) 16M x 36	(2) 1M x 36	None
144MB	(2) 16M x 36	(2) 1M x 36	(2) 1M x 36
144MB	(2) 16M x 36	(2) 2M x 36	None

Continued on next page. . .

HEWLETT-PACKARD COMPANY  
HP VECTRA XA 6/XXX

... continued from previous page

SIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
160MB	(2) 16M x 36	(2) 2M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36	None
192MB	(2) 16M x 36	(2) 4M x 36	(2) 4M x 36
192MB	(2) 16M x 36	(2) 8M x 36	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
Note: Board accepts EDO memory.			

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium Pro CPU.

CPU SPEED SELECTION							
CPU speed	Clock speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
150MHz	60MHz	2.5x	On	Off	Off	Off	On
166MHz	66MHz	2.5x	Off	Off	Off	Off	On
180MHz	60MHz	3x	On	Off	Off	On	Off
200MHz	66MHz	3x	Off	Off	Off	On	Off
233MHz	66MHz	3.5x	Off	Off	Off	On	On
266MHz	66MHz	4x	Off	Off	On	Off	Off