


ZIDA TECHNOLOGIES INC.

TX98 (VER. 1.01)

Device Type	Mainboard
Processor	CX 6X86L/IBM 6X86L/CX 6X86MX/IBM 6X86MX/IDT C6/AM K5/ AM K6/Pentium/Pentium MMX
Processor Speed	100/120/133/150/166/200/225/233/266/300/333MHz
Chip Set	VIA VPX
Video Chip Set	None
Maximum Onboard Memory	256MB (EDO & SDRAM supported)
Maximum Video Memory	None
Cache	256/512KB
BIOS	AMI
Dimensions	220mm x 200mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2), IR connector, USB connectors (2), ATX power connector, TB-link connector, wake on LAN connector, TA-link connector
NPU Options	None

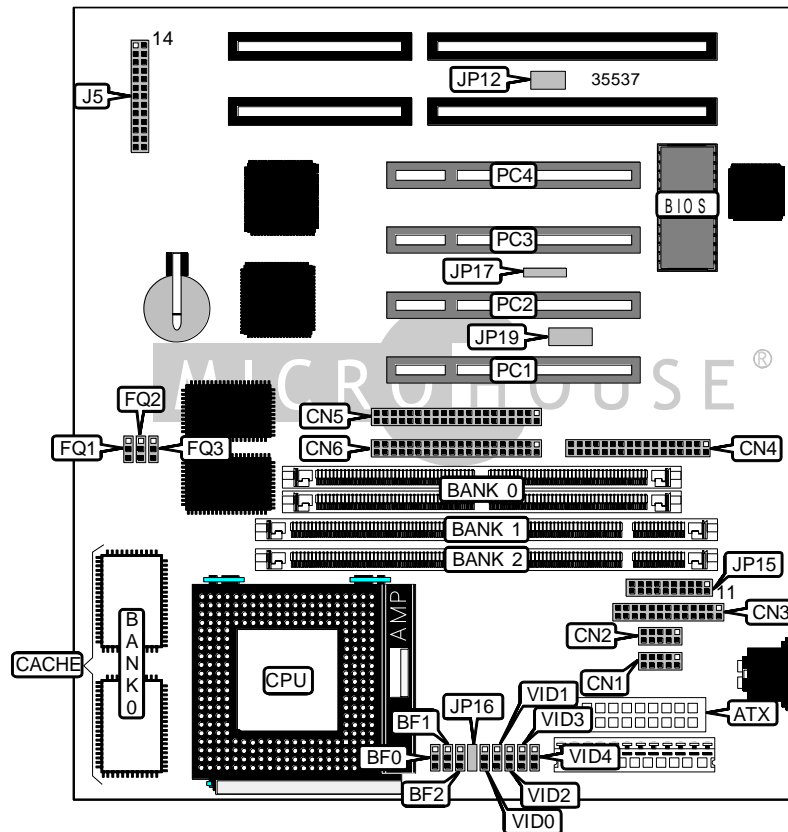

Continued on next page. . .

ZIDA TECHNOLOGIES INC.
TX98 (VER. 1.01)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Speaker	J5/pins 10 – 13
Serial port 1	CN1	IDE interface LED	J5/pins 14 & 15
Serial port 2	CN2	TB-link connector	JP12
Parallel port	CN3	USB connector 1	JP15/pins 1 - 5
Floppy drive interface	CN4	PS/2 mouse interface	JP15/pins 6 – 10
IDE interface 1	CN5	USB connector 2	JP15/pins 11 – 15
IDE interface 2	CN6	IR connector	JP15/pins 16 - 20
Audio in – CD-ROM	J6	Wake on LAN connector	JP17
Audio in – CD-ROM	J7	Audio connector	JP18
Power LED & keylock	J5/pins 1 – 5	TA-link connector	JP19
Green PC connector	J5/pins 7 & 8	32-bit PCI slots	PC1 – PC4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Auto jumper enabled	JP16	Pins 1 & 2 closed
Auto jumper disabled	JP16	Pins 2 & 3 closed

SIMM CONFIGURATION	
Size	Bank 0
8MB	(2) 1M x 36
16MB	(2) 2M x 36
32MB	(2) 4M x 36
64MB	(2) 8M x 36
128MB	(2) 16M x 36

Note: Board accepts EDO memory.

DIMM CONFIGURATION		
Size	Bank 1	Bank 2
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None

Continued on next page...

ZIDA TECHNOLOGIES INC.
TX98 (VER. 1.01)

... continued from previous page

DIMM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION	
Size	Bank 0
256KB	(2) 32K x 32
512KB	(2) 64K x 32

CPU SPEED SELECTION (CX 6X86L)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
150MHz	60MHz	2x	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2
166MHz	66MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IBM 6X86L)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
150MHz	60MHz	2x	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2
166MHz	66MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page. . .

ZIDA TECHNOLOGIES INC.
TX98 (VER. 1.01)

... continued from previous page

CPU SPEED SELECTION (CX 6X86MX)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
200MHz	75MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
233MHz	75MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2
266MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
300MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
300MHz	75MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2
333MHz	75MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
333MHz	83MHz	3x	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2	2 & 3

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IBM 6X86MX)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
200MHz	75MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
233MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
233MHz	75MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2
266MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
300MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
300MHz	75MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2
333MHz	75MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
333MHz	83MHz	3x	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2	2 & 3

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (IDT C6)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
150MHz	50MHz	3x	1 & 2	2 & 3	1 & 2	2 & 3	2 & 3	2 & 3
150MHz	75MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
180MHz	60MHz	3x	1 & 2	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2
200MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
225MHz	75MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page...

ZIDA TECHNOLOGIES INC.
TX98 (VER. 1.01)

... continued from previous page

CPU SPEED SELECTION (AM K5)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
100MHz	66MHz	1.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
166MHz	66MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AM K6)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
166MHz	66MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
200MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
233MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
266MHz	66MHz	4x	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
300MHz	66MHz	4.5x	2 & 3	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2
333MHz	66MHz	5x	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (INTEL)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
100MHz	66MHz	1.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
120MHz	60MHz	2x	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2	1 & 2
133MHz	66MHz	2x	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
150MHz	60MHz	2.5x	2 & 3	2 & 3	1 & 2	2 & 3	1 & 2	1 & 2
166MHz	66MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
200MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (INTEL MMX)								
CPU speed	Clock speed	Multiplier	BF0	BF1	BF2	FQ1	FQ2	FQ3
166MHz	66MHz	2.5x	2 & 3	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
200MHz	66MHz	3x	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
233MHz	66MHz	3.5x	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page. . .

ZIDA TECHNOLOGIES INC.
TX98 (VER. 1.01)

... continued from previous page

CPU VOLTAGE SELECTION					
Voltage	VID0	VID1	VID2	VID3	VID4
2.2v	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2
2.8v	1 & 2	1 & 2	1 & 2	2 & 3	1 & 2
2.9v	2 & 3	1 & 2	1 & 2	2 & 3	1 & 2
3.2v	1 & 2	1 & 2	2 & 3	2 & 3	1 & 2
3.3v	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2
3.4v	1 & 2	2 & 3	2 & 3	2 & 3	1 & 2
3.5v	2 & 3	2 & 3	2 & 3	2 & 3	1 & 2

Note: Pins designated should be in the closed position.