


DIGITAL EQUIPMENT CORPORATION CELEBRIS FX-2

Device Type	Mainboard
Processor	Pentium
Processor Speed	90/100/120/133/150/166/180/200MHz
Chip Set	Unidentified
Video Chip Set	S3
Maximum Onboard Memory	256MB (SDRAM supported)
Maximum Video Memory	4MB
Cache	256/512KB
BIOS	Unidentified
Dimensions	254mm x 218mm
I/O Options	Ethernet 10/100BaseT connector, parallel port, PS/2 mouse port, serial port, VGA feature connector, VGA port, VRM connector, USB connectors (2)
NPU Options	None

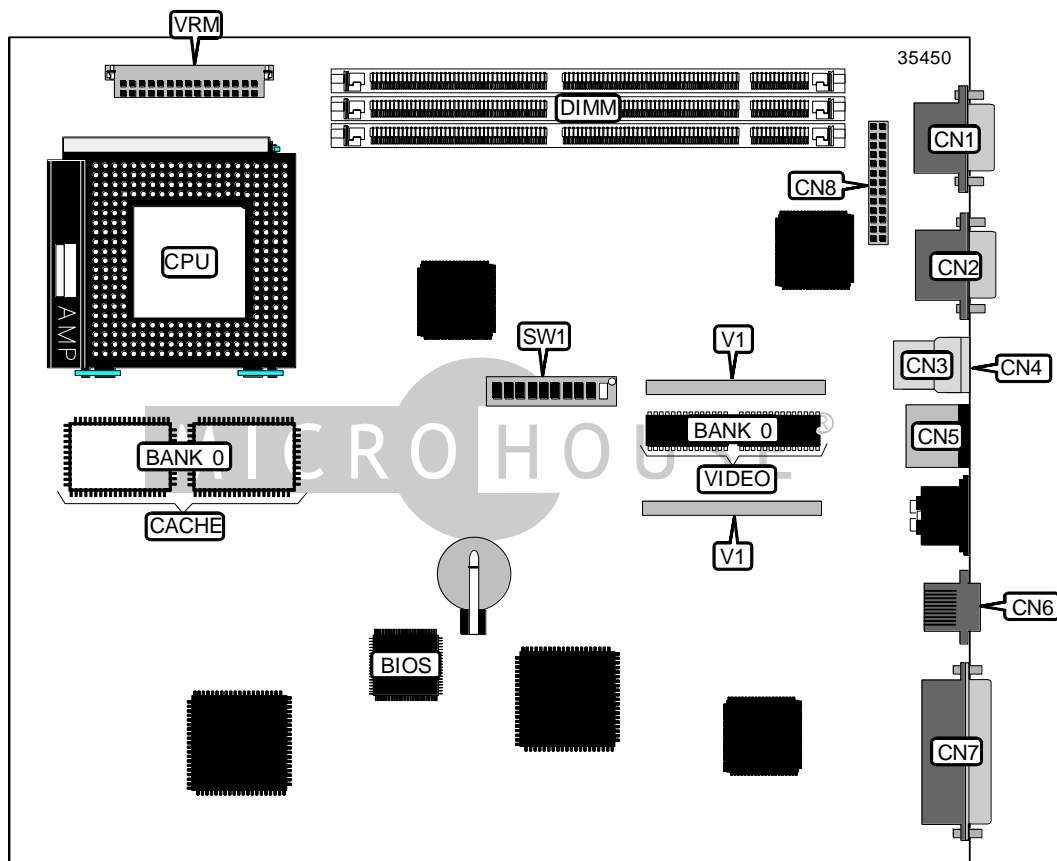

Continued on next page. . .

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS FX-2

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	CN1	Ethernet 10/100BaseT connector	CN6
VGA port	CN2	Parallel port	CN7
USB connector	CN3	VGA feature connector	CN8
USB connector	CN4	VRM connector	VRM
PS/2 mouse port	CN5		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Password normal operation	SW1/2	Off
Password clear	SW1/2	On
í BIOS normal operation	SW1/3	Off
BIOS recovery mode	SW1/3	On
í CMOS memory normal operation	SW1/4	Off
CMOS memory clear	SW1/4	On
í BIOS write disabled	SW1/5	Off
BIOS write enabled	SW1/5	On
í Factory configured - do not alter	SW1/6	Off

DIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
16MB	(1) 2M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
32MB	(1) 4M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None
64MB	(1) 8M x 64	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
128MB	(1) 16M x 64	None	None
164MB	(1) 16M x 64	(1) 1M x 64	None
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None

Continued on next page...

DIGITAL EQUIPMENT CORPORATION
 CELEBRIS FX-2

... continued from previous page

DIMM CONFIGURATION (CON'T)			
Size	Bank 0	Bank 1	Bank 2
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION	
Size	Bank 0
256KB	(2) 32K x 32
512KB	(2) 64K x 32

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	V1
2MB	(2) 512K x 16	Not installed
4MB	(2) 512K x 16	2MB module installed

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	SW1/1	SW1/7	SW1/8
90MHz	60MHz	1.5x	Off	Off	Off
100MHz	66MHz	1.5x	On	Off	Off
120MHz	60MHz	2x	Off	On	Off
133MHz	66MHz	2x	On	On	Off
150MHz	60MHz	2.5x	Off	On	On
166MHz	66MHz	2.5x	On	On	On
180MHz	60MHz	3x	Off	Off	On
200MHz	66MHz	3x	On	Off	On