


CALIBER COMPUTER

386-25B

Configuration

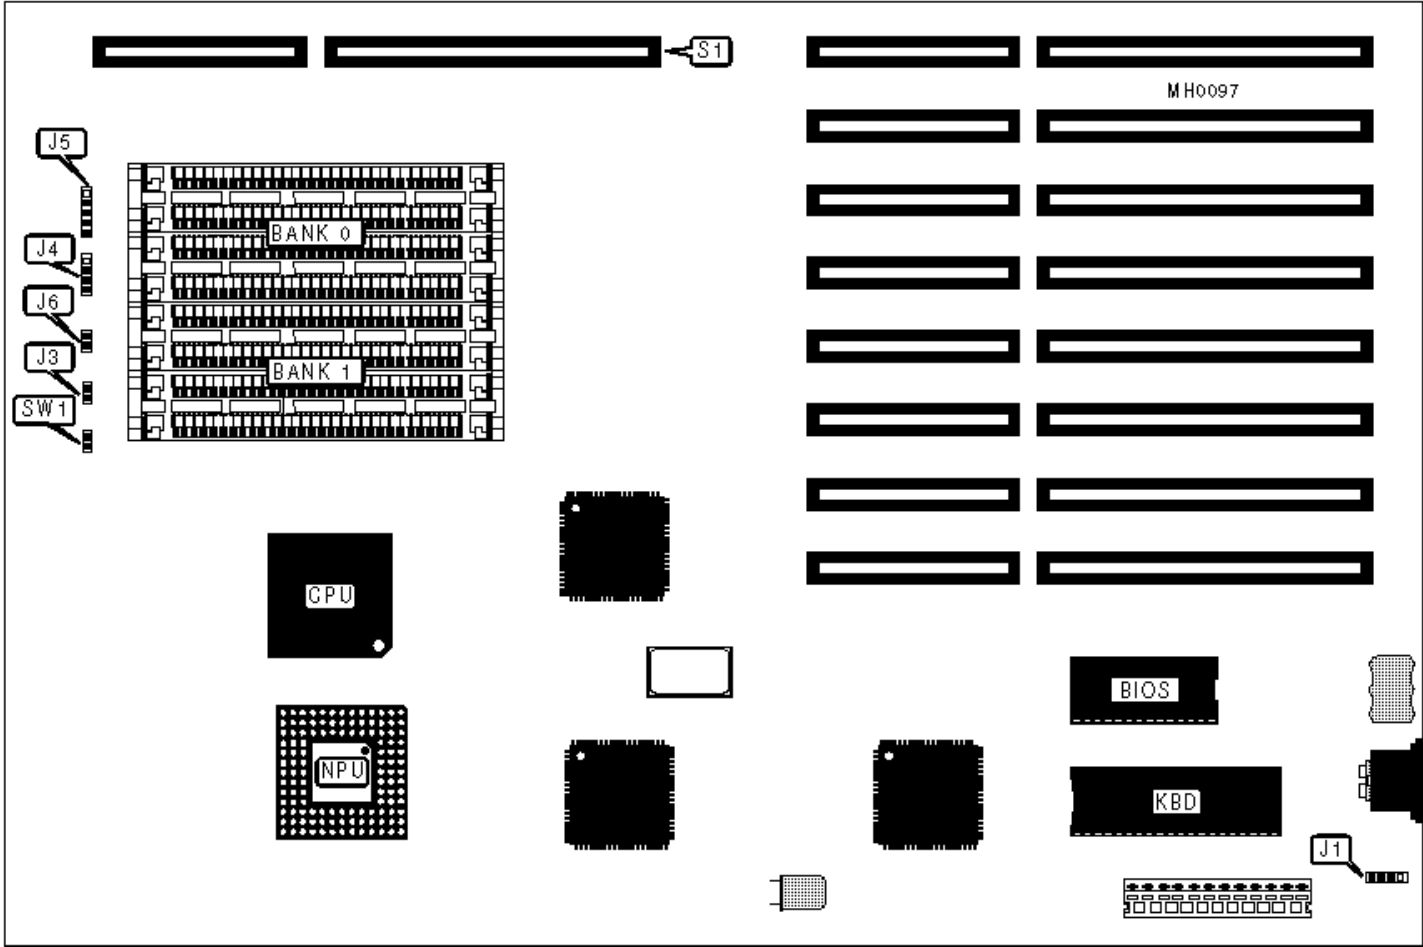

## CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	J6
Speaker	J4	32-bit external memory card	S1
Power LED & keylock	J5	Reset switch	SW1

## USER CONFIGURABLE SETTINGS

Function	Jumper	Position
» Monitor type select color	J2	pins 1 & 2 closed
Monitor type select monochrome	J2	pins 1 & 2 open

## DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9