


CALIBER COMPUTER

80486-33A

Configuration

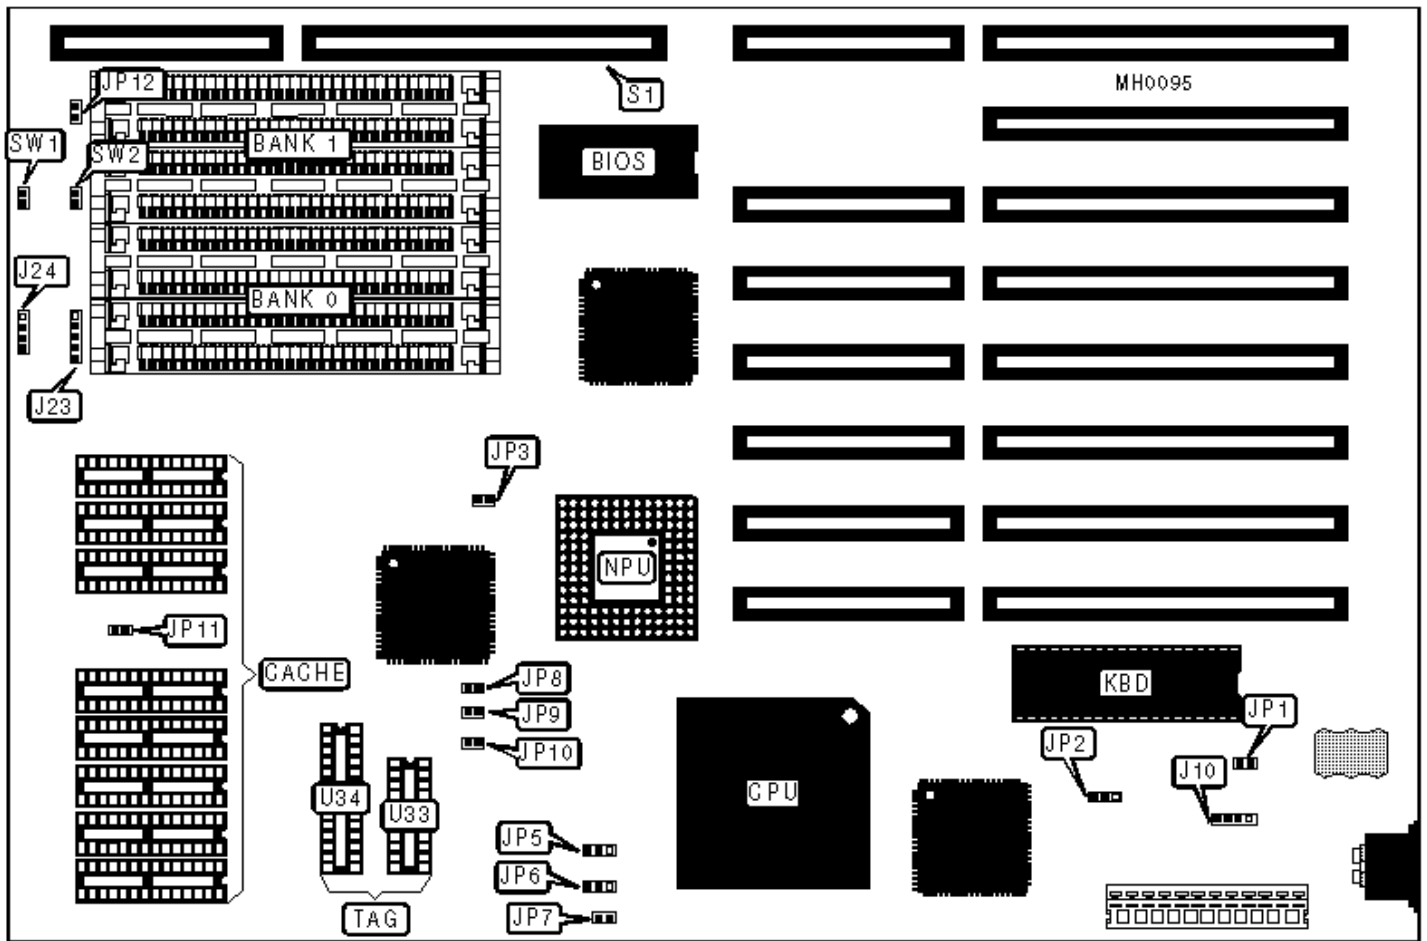

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	J10	32-bit external memory card	S1
Power LED & keylock	J23	Reset switch	SW1
Speaker	J24	Turbo switch	SW2
Turbo LED	JP12		

USER CONFIGURABLE SETTINGS

»	Monitor type select color	JP1	Closed
	Monitor type select monochrome	JP1	Open
»	CMOS memory normal operation	JP2	pins 2 & 3 closed
	CMOS memory clear	JP2	pins 1 & 2 closed
»	Bus speed select iOSC/4	JP3	Open
	Bus speed select iOSC/6	JP3	Closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION

Size	Bank 0	TAG (U33)	TAG (U34)
64KB	(8) 8K x 8	(1) 32K x 1	(1) 8K x 8

256KB	(8) 32K x 8	(1) 32K x 1	(1) 32K x 8
-------	-------------	-------------	-------------

CACHE JUMPER CONFIGURATION				
Size	JP8	JP9	JP10	JP11
64KB	Open	Open	Open	Open
256KB	Closed	Closed	Open	Closed

CPU TYPE CONFIGURATION			
Type	JP5	JP6	JP7
80486SX	Open	pins 2 & 3 closed	Open
80487SX	pins 1 & 2 closed	pins 1 & 2 closed	Closed
80486DX	pins 2 & 3 closed	pins 1 & 2 closed	Closed