


WYSE TECHNOLOGY, INC.

WYSE DECISION 386SX/16S

Configuration

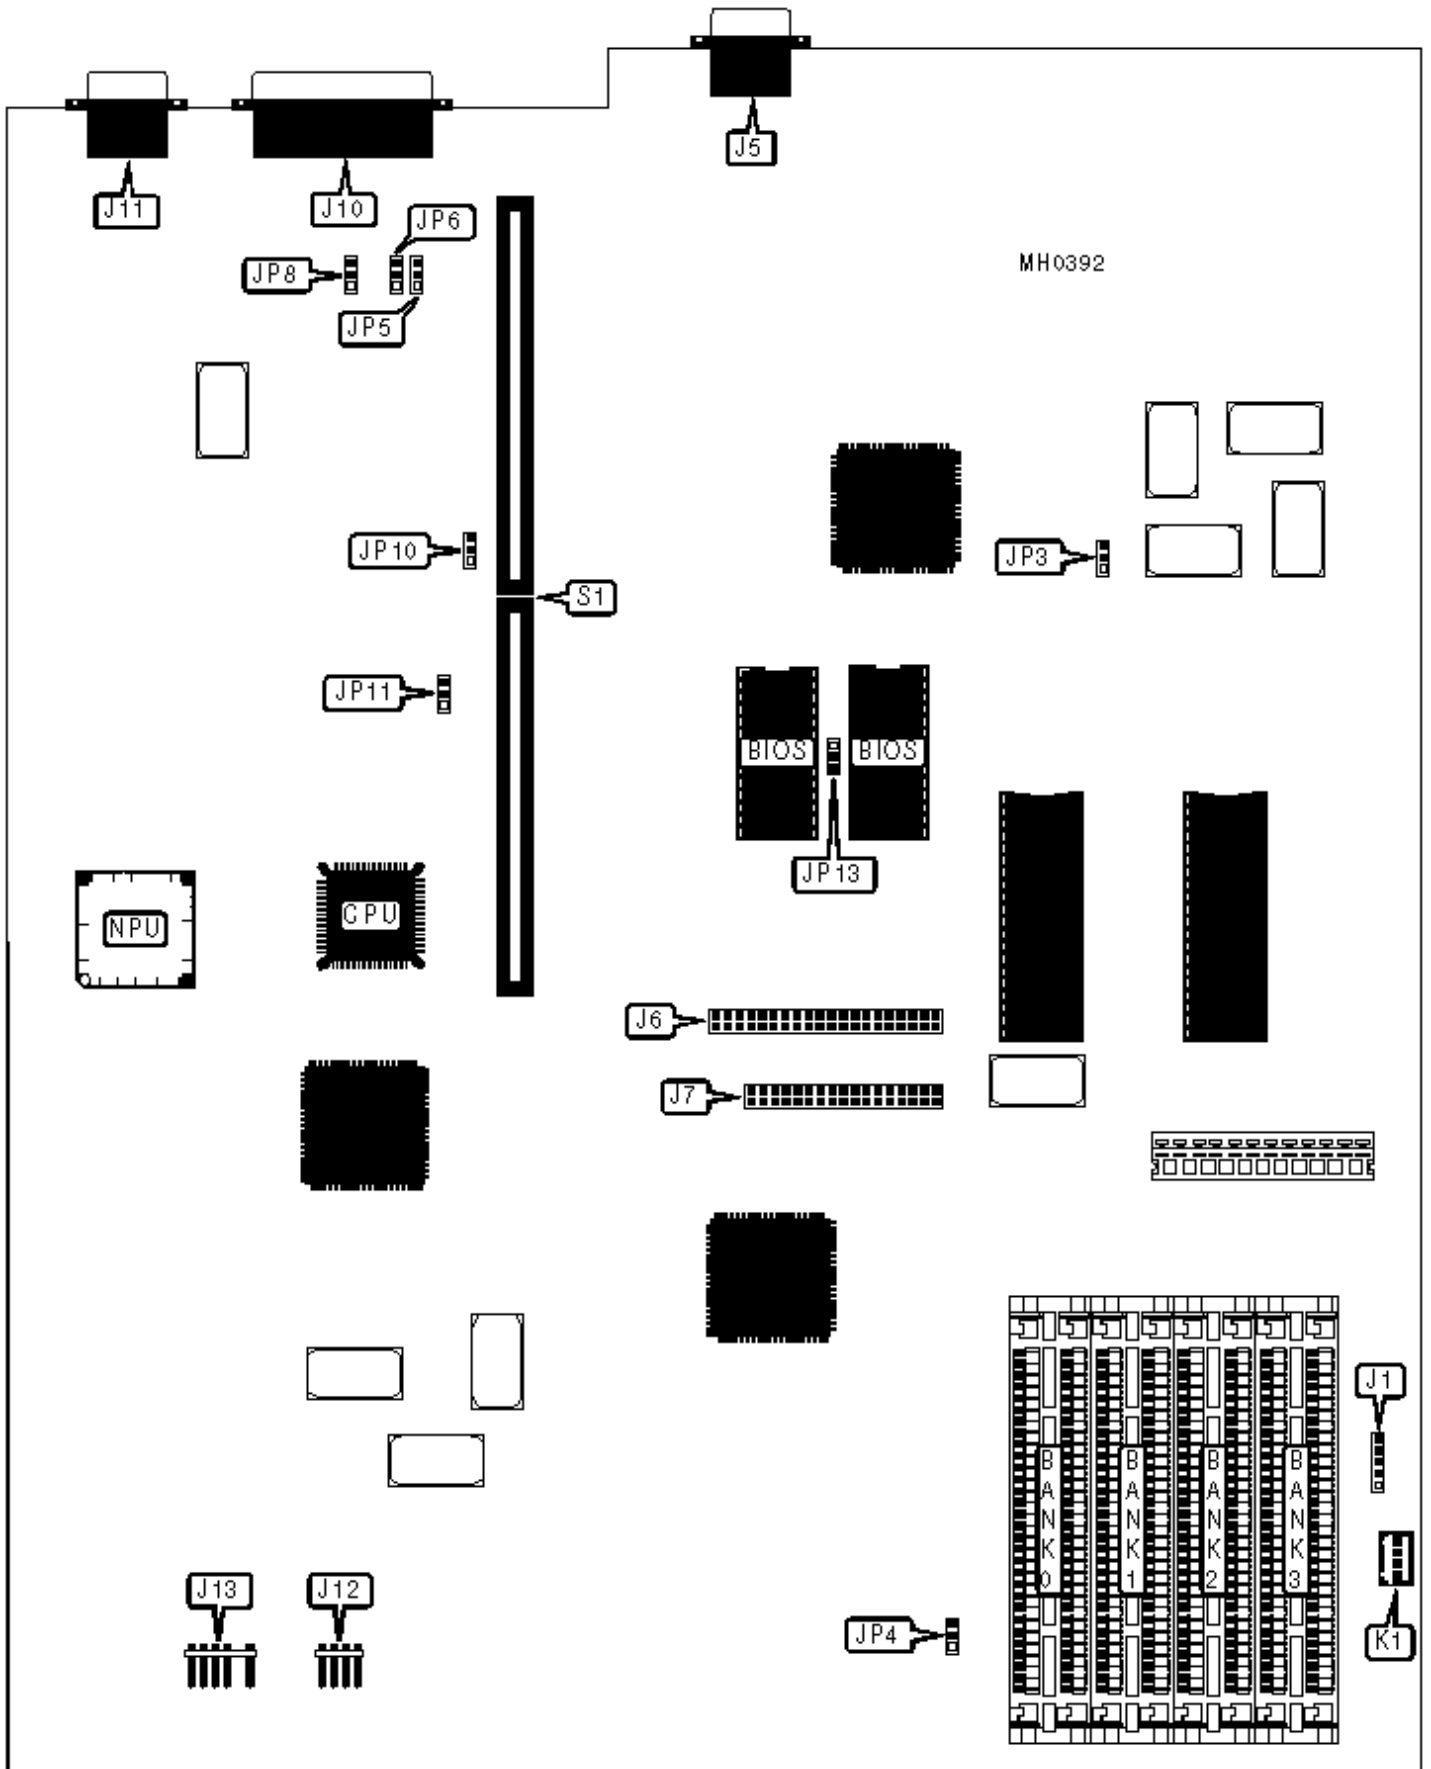

CONNECTIONS

Purpose	Location	Purpose	Location
PS/2 mouse port connector	J1	Serial port	J11
VGA port	J5	External battery	J12
IDE interface	J6	Power LED/Reset switch	J13
Floppy drive interface	J7	Keyboard port connector	K1
Parallel port	J10	Proprietary riser card connector	S1

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
» IRQ2 disabled	JP3	pins 2 & 3 closed
IRQ2 enabled	JP3	pins 1 & 2 closed
» Floppy drive interface enabled	JP4	pins 1 & 2 closed
Floppy drive interface disabled	JP4	pins 2 & 3 closed
» Mouse type select PS/2	JP5	pins 2 & 3 closed
Mouse type select serial	JP5	pins 1 & 2 closed
» VGA port (J5) enabled	JP6	pins 2 & 3 closed
VGA port (J5) disabled	JP6	pins 1 & 2 closed
» Monitor type select color	JP8	pins 1 & 2 closed
Monitor type select monochrome	JP8	pins 2 & 3 closed
» Parallel port (J10) interrupt select IRQ7	JP10	pins 2 & 3 closed
Parallel port (J10) interrupt select IRQ5	JP10	pins 1 & 2 closed
» Serial port (J11) interrupt select IRQ4	JP11	pins 2 & 3 closed
Serial port (J11) interrupt select IRQ3	JP11	pins 1 & 2 closed
» VGA clock source select internal (36MHz)	JP13	pins 2 & 3 closed
VGA clock source select external	JP13	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1MBx 9	(2) 1MBx 9	NONE	NONE
5MB	(2) 1MBx 9	(2) 1MBx 9	(2) 256K x 9	(2) 256K x 9
8MB	(2) 1MBx 9	(2) 1MBx 9	(2) 1MBx 9	(2) 1MBx 9