


ZENITH DATA SYSTEMS
Z STATION IIE ("H" and "N" Chassis)

Configuration

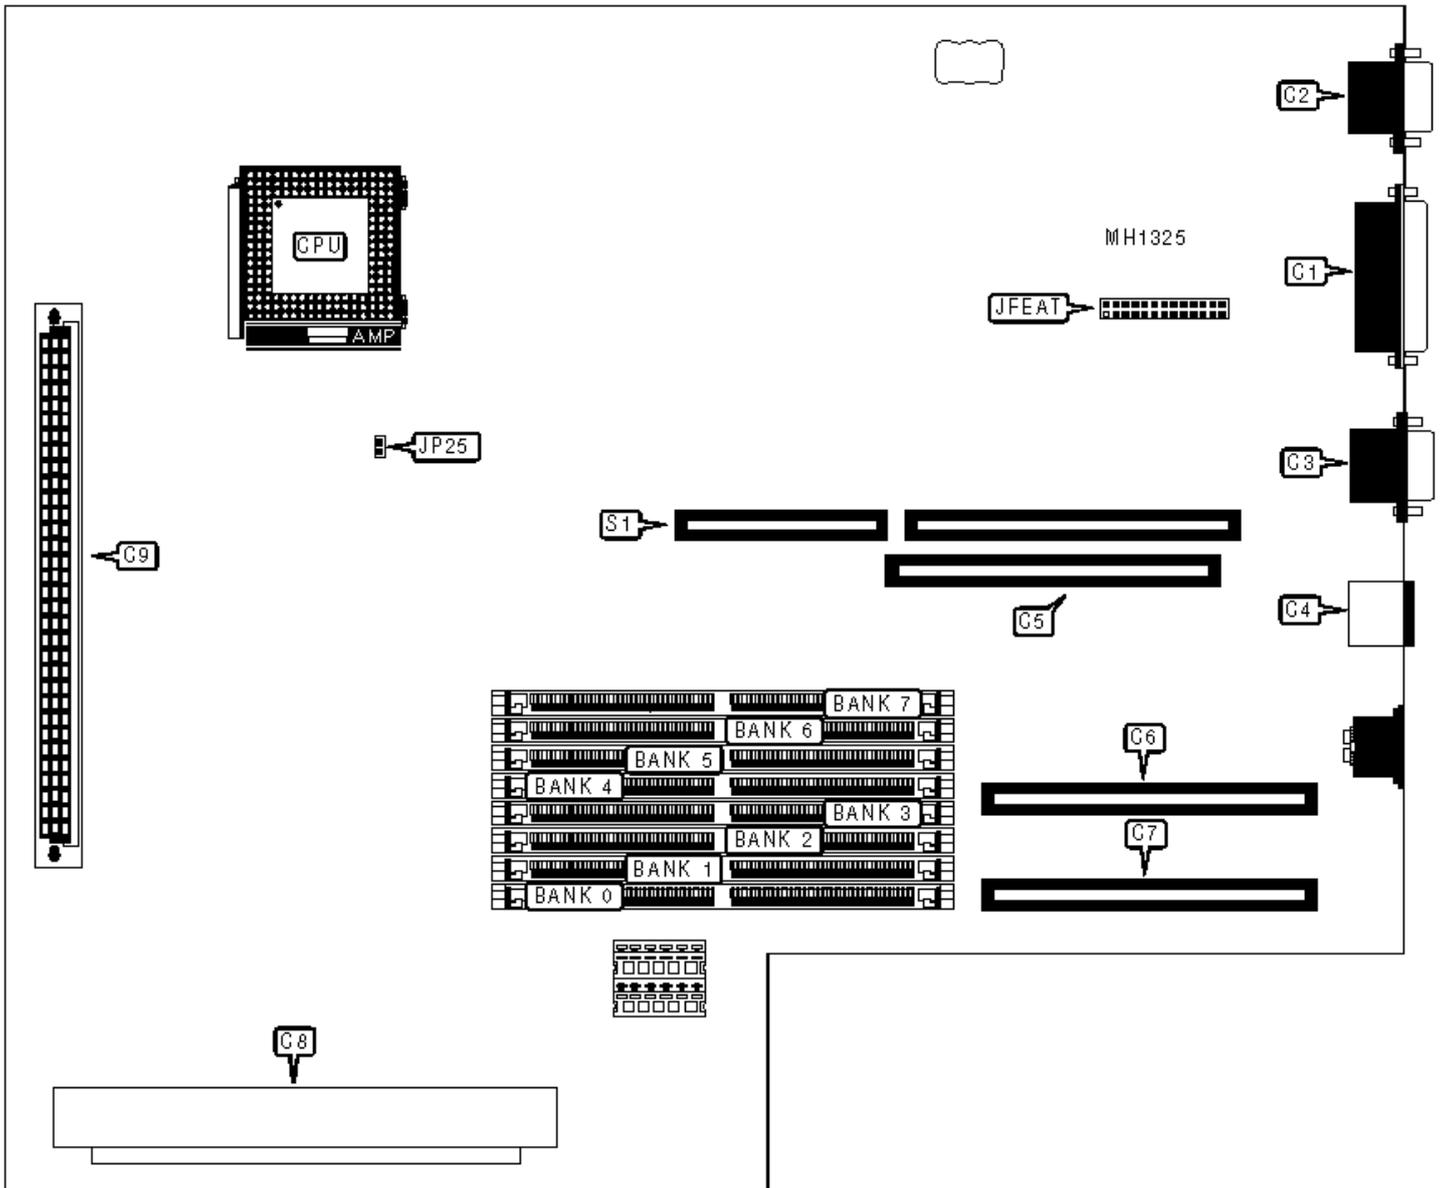

CONNECTIONS

Purpose	Location	Purpose	Location
Parallel port	C1	SCSI module	C7
Serial port 1	C2	IDE interface	C8
Serial port 2	C3	External CPU/Cache module	C9
Bus mouse	C4	VGA feature connector	JFEAT
VGA module	C5	16-bit riser card	S1
LAN module	C6		

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
CPU speed select < = 33MHz	JP25	open
CPU speed select > 33MHz	JP25	closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5	Bank 6	Bank 7
4MB	256K x 36	256K x 36	256K x 36	256K x 36	NONE	NONE	NONE	NONE
5MB	1M x 36	NONE	256K x 36	NONE	NONE	NONE	NONE	NONE
8MB	1M x 36	1M x 36	NONE	NONE	NONE	NONE	NONE	NONE
12MB	1M x 36	1M x 36	1M x 36	NONE	NONE	NONE	NONE	NONE
16MB	1M x 36	1M x 36	1M x 36	1M x 36	NONE	NONE	NONE	NONE
16MB	4M x 36	NONE						
24MB	4M x 36	NONE	1M x 36	1M x 36	NONE	NONE	NONE	NONE
24MB	4M x 36	NONE	1M x 36	NONE	256K x 36	256K x 36	256K x 36	256K x 36
32MB	4M x 36	4M x 36	NONE	NONE	NONE	NONE	NONE	NONE
34MB	4M x 36	4M x 36	256K x 36	256K x 36	NONE	NONE	NONE	NONE

