

SUPERMICRO

SUPER P6DOF Specifications

PROCESSOR

- Dual Pentium Pro processor 200/180/166/150 MHz
- Integrated 256/512KB non-blocking L2 cache built-in
- Dual ZIF (Zero Insertion Force) socket 8

CHIPSET


- Intel 82450GX PCIset

EXPANSION

- 4 32-bit PCI slots
- 4 16-bit ISA slots

SYSTEM MEMORY

- 4-way interleaved for 4/8/16/32/64/128 MB 36-bit fast page mode
- 8 72-pin SIMM sockets support 8MB to 1GB
- ECC (Error Checking and Correction) support

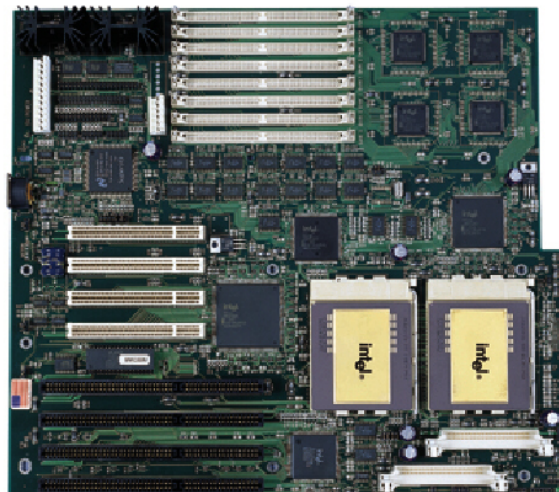

ON BOARD I/O

- 1 IDE interface
- 2 fast UART 16550 serial ports
- 1 floppy interface
- ECP/EPP parallel port

BIOS

- AMI flash BIOS
- PnP (Plug and Play) support

DIMENSIONS

- Full AT size 13.8" x 12"

[\[P6DOF\]](#) Click here to see a picture of the board

[\[HOME\]](#) Back to Home Page

[\[PRODUCT\]](#) Back to Product Information Page

Last modified by A.K.T. on 3/22/96

© 1996 SUPERMICRO COMPUTER, INC.