


# IBM CORPORATION PS/2 MODEL 65SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	None
<b>Max. Onboard DRAM</b>	4MB
<b>Cache</b>	None
<b>BIOS</b>	IBM
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Serial port, parallel port, pointing device connector, video port, floppy drive interface, video expansion slot
<b>NPU Options</b>	80387SX

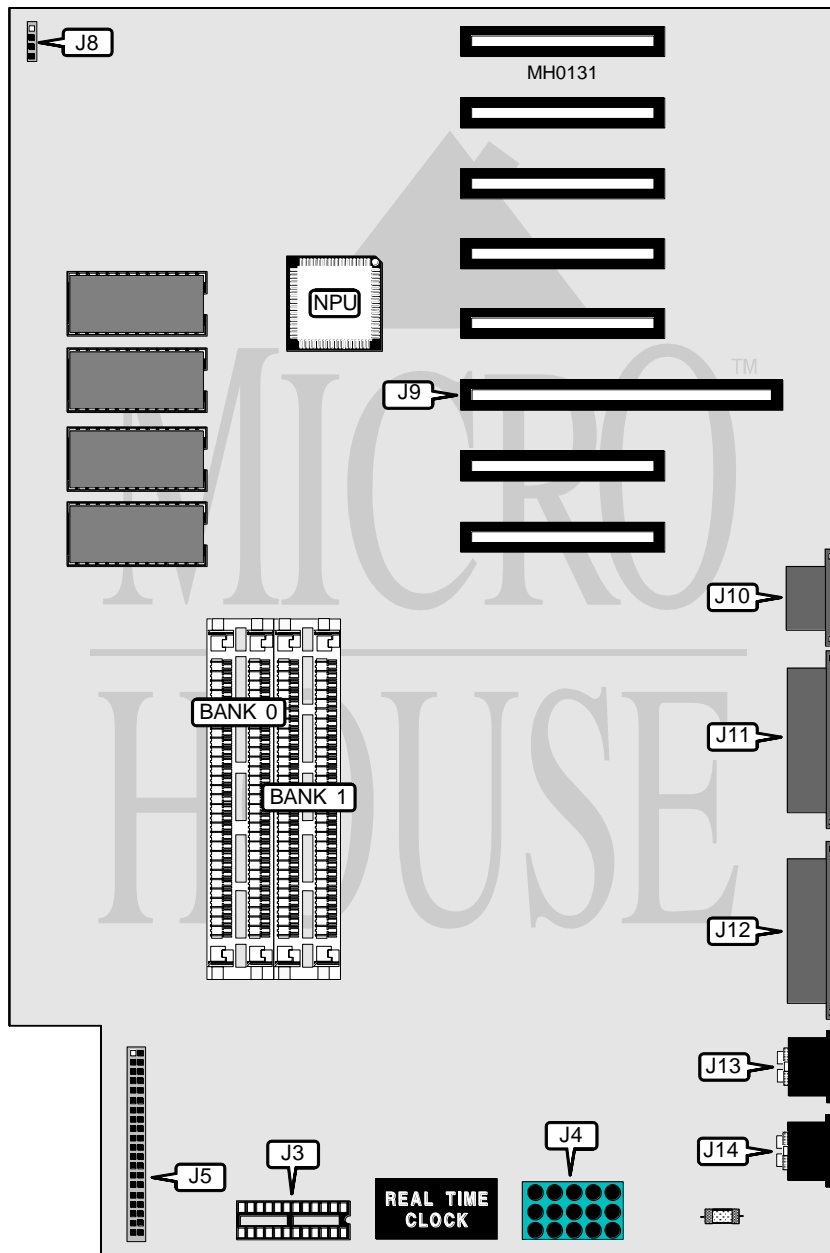

Continued on next page . . .

# IBM CORPORATION

## PS/2 MODEL 65SX

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
CMOS RAM extension module	J3	Video port	J10
Power supply	J4	Serial port	J11
Floppy drive	J5	Parallel port	J12
Speaker	J8	Pointing device	J13
Video adapter slot	J9	Keyboard	J14

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9
4MB	(2) 1M x 9	(2) 1M x 9

Note: Onboard memory does not have to be installed in order to use memory expansion cards.