
ILON USA, INC. M - 3 9 6

| Processor |
|-------------------|
| Processor Speed |
| Chip Set |
| Max. Onboard DRAM |
| Cache |
| BIOS |
| Dimensions |
| I/O Options |
| NPU Options |
| |

80386SX 16/20/25MHz PC CHIPS 16MB None AMI 220mm x 170mm None 80387SX

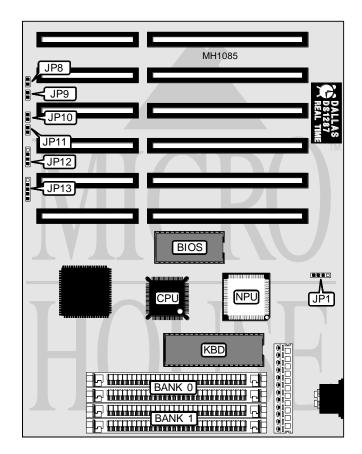

| CONNECTIONS | | | | |
|------------------|----------|---------------------|----------|--|
| Purpose | Location | Purpose | Location | |
| External battery | JP1 | Turbo switch | JP11 | |
| Reset switch | JP9 | Speaker | JP12 | |
| Turbo LED | JP10 | Power LED & keylock | JP13 | |

Continued on next page . . .

ILON USA, INC. M - 3 9 6

... continued from previous page

| USER CONFIGURABLE SETTINGS | | | | |
|--------------------------------|--------|-------------------|--|--|
| Function | Jumper | Position | | |
| í Battery type select internal | JP1 | pins 2 & 3 closed | | |
| Battery type select external | JP1 | Closed | | |
| í Monitor type select color | JP8 | Closed | | |
| Monitor type select monochrome | JP8 | Open | | |

| DRAM CONFIGURATION | | | | |
|--------------------|--------------|--------------|--|--|
| Size | Bank 0 | Bank 1 | | |
| 512KB | (2) 256K x 9 | NONE | | |
| 1MB | (2) 256K x 9 | (2) 256K x 9 | | |
| 2MB | (2) 1M x 9 | NONE | | |
| 4MB | (2) 1M x 9 | (2) 1M x 9 | | |
| 8MB | (2) 4M x 9 | NONE | | |
| 16MB | (2) 4M x 9 | (2) 4M x 9 | | |