
NCR CORPORATION MODEL 3278-XXXX PC710/3392

- Processor Processor Speed Chip Set Video Chip Set Maximum Onboard Memory Maximum Video Memory Cache BIOS Dimensions I/O Options NPU Options
- 80286 (exact location unidentified) 6/10MHz Unidentified None 640KB (on mainboard), (16MB on external memory card) None None Unidentified Unidentified Expansion slot 80287 (exact location unidentified)

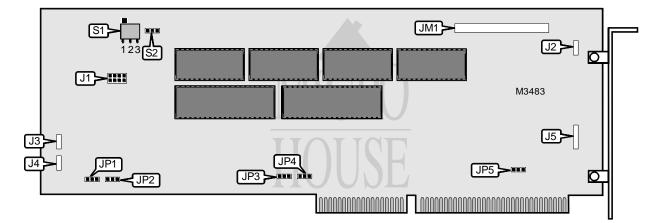

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J2	Auxiliary keyboard connector	J5	
Keylock	J3	Expansion slot	JM1	
Volume control	J4			

Continued on next page. . .

NCR CORPORATION MODEL 3278-XXXX PC710/3392

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
í BIOS type select 32KB	J1	Pins 3 & 6, 4 & 5 closed		
BIOS type select 16KB	J1	Pins 1 & 8, 2 & 7 closed		
í Wait state select 1 wait state	JP1	Pins 1 & 2 closed		
Wait state select 0 wait states	JP1	Pins 2 & 3 closed		
í 10MHz CPU speed enabled	JP2	Pins 1 & 2 closed		
10MHz CPU speed disabled	JP2	Pins 2 & 3 closed		
í Memory expansion card installed	JP5	Pins 1 & 2 closed		
Memory expansion card not installed	JP5	Pins 2 & 3 closed		
Monitor type select graphics display	S1	Left		
Monitor type select alphanumeric display	S1	Right		
í Power on speed select 10MHz	S2	Pins 1 & 2 closed		
Power on speed select 6MHz	S2	Pins 2 & 3 closed		

DRAM CONFIGURATION

Note: The location of the memory is unidentified. Board accepts 256KB or 512KB memory.

DRAM JUMPER CONFIGURATION			
Size JP3			
256KB	Pins 2 & 3 closed		
512KB	Pins 1 & 2 closed		

DRAM JUMPER CONFIGURATION			
Setting	JP4		
All onboard memory enabled	Pins 1 & 2 closed		
All onboard memory disabled	Pins 2 & 3 closed		